SONY

TRINITRON® COLOR VIDEO MONITOR

BVM-14M4DE

CHASSIS NO. SCC-N33A-A

BVM-14M4DJ

CHASSIS NO. SCC-N34A-A

SUPPLEMENT-1

Subject : A, C, G, H board changed

File this Supplement with the OPERATION AND MAINTENANCE MANUAL.

安全のための注意事項を守らないと、人身事故になることがあります。

Trinitron

MAINTENANCE MANUAL
1st Edition
Serial No. 2010001 and Higher

目次
TABLE OF CONTENTS

3-S1. W/B 飛び込み補正調整 3
S1-1. NTSC コンポジットの調整 3
S1-2. PAL コンポジットの調整 3
S1-3. COMPONENT の調整 3
S1-4. DIGITAL の調整 3
S1-5. NTSC443 コンポジットの調整 3
3-S2. ウィンドウ輝度調整 3
S2-1. 4 : 3 モードの SUB CONT 調整 3
S2-2. 16 : 9 モードの SUB CONT 調整 3
S2-3. H/V DELAY 時の SUB CONT 調整 4
3-S1. W/B plunge correction adjustment 5
S1-1. Adjustment of NTSC composite 5
S1-2. Adjustment of PAL composite 5
S1-3. Adjustment of COMPONENT 5
S1-4. Adjustment of DIGITAL 5
S1-5. Adjustment of NTSC443 composite 5
3-S2. Adjustment of window brightness 6
S2-1. Adjustment of SUB CONT in 4 : 3 mode 6
S2-2. Adjustment of SUB CONT in 16 : 9 mode 6
S2-3. Adjustment of SUB CONT during H/V DELAY 6

4-3. 基板配置図 7
4-4. 回路図, プリント図 7
4-3. Circuit Boards Location 8
4-4. Printed Wiring Boards and Scematic Diagrams 8

A Board 9
C Board 33
H Board 35
G Board 36

6. ELECTRICAL PARTS LIST 39

Note : Make these 2 adjustments (3-S1, 3-S2) after perfoming section 3-13.

3-S1. W/B plunge correction adjustment

S1-1. Adjustment of NTSC composite

1) Input the 525 all white (with burst) cut-off signal.
2) Adjust the brightness to a value below 10 cd/m^2 with CONT and BRT VR.

   Brightness adjustment:3 cd/m^2

3) Turn CHROMA VR to MIN, and measure the color temperature.
4) Turn CHROMA VR to MAX, and make adjustment with NTSC B-Y and NTSC R-Y so that the color temperature will be the same as the value measured in item 3).

   Standard adjustment:
   The difference should be within 2 JND when CHROMA MIN ⟶ MAX.

S1-2. Adjustment of PAL composite

1) Input the 625 all white (with burst) cut-off signal.
2) Repeat the operations S1-1. 2) and 3).
3) Turn CHROMA VR to MAX, and make adjustment with PAL B-Y and PAL R-Y so that the color temperature will be the same as the value measured in item 2).

   Standard adjustment:
   The difference should be within 2 JND when CHROMA MIN ⟶ MAX.

S1-3. Adjustment of COMPONENT

1) Input the 525 all white cut-off signal to Y.

Note : NTSC all white (with burst) may be input.

2) Repeat the opelations S1-1. 2) and 3).
3) Turn CHROMA VR to MAX, and make adjustment with COMPONENT B-Y and COMPONENT R-Y so that the color temperature will be the same as the value measured in item 2).

   Standard adjustment:
   The difference should be within 2 JND when CHROMA MIN ⟶ MAX.

S1-4. Adjustment of DIGITAL

1) Input the DI 525 all white cut-off signal.
2) Repeat the operations S1-1. 2) and 3).
3) Turn CHROMA VR to MAX, and make adjustment with DIGITAL R-Y and DIGITAL B-Y so that the color temperature will be the same as the value measured in item 2).

   Standard adjustment:
   The difference should be within 2 JND when CHROMA MIN ⟶ MAX.

S1-5. Adjustment of NTSC443 composite

1) Input the all white (with burst) cut-off signal.
2) Repeat the operations S1-1. 2) and 3).
3) Turn CHROMA VR to MAX, and make adjustment with NTSC443 R-Y and NTSC443 B-Y so that the color temperature will be same as the value measured in item 2).

   Standard adjustment:
   The difference should be within 2 JND when CHROMA MIN ⟶ MAX.

3-S2. Adjustment of window brightness

S2-1. Adjustment of SUB CONT in 4:3 mode

1) Input the 625 window (with burst) signal.

Note : The area of the window should be smaller than the area shown below. (ABL should not be activated.)

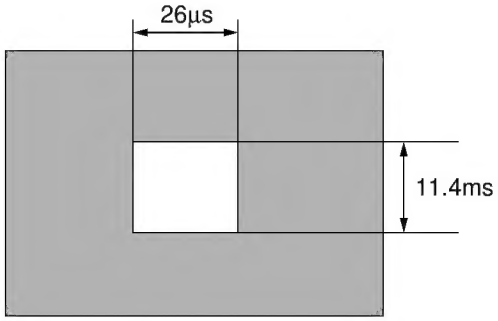

2) Attach the luminance meter to the window of the CRT.
3) Adjust the [SUB CON <4:3 NORM>] to the value shown in Table 3-8.
4) Record the SUB CON<4:3 NORM> data.

S2-2. Adjustment of SUB CONT in 16:9 mode

1) Input the 625 window (with burst) signal.
2) Enter the 16:9 mode.
3) Attach the luminance meter to the window of the CRT.
4) Adjust the SUB CON<16:9 NORM> to the value shown in Table 3-8.
5) Record the SUB CON<16:9NORM> data.

Table 3-8

The color temperature should be 6500°K Unit (cd/m^2)

	14inch	20inch
SUB CON <4:3 NORM>	170 ± 20	150 ± 20
SUB CON <16:3 NORM>	170 ± 20	150 ± 20

S2-3. Adjustment of SUB CONT during H/V DELAY

1) Input the 625 window (with burst) signal.
2) Enter the H/V DELAY mode.
3) Enter the 4:3 mode.
4) Attach the luminance meter to the window of CRT.
5) Adjust the SUB CON<4:3 H/V DELAY> to the value shown in Table 3-9.
6) Enter the 16:9 mode.
7) Attach the luminance meter to the window of the CRT.
8) Adjust the SUB CON<16:9 HV DELAY> to the value shown in Table 3-9.

Table 3-9

The color temperature should be 6500°K Unit (cd/m^2)

	14inch	20inch
SUB CON <4:3 NORM>	170 ± 20	150 ± 20
SUB CON <16:3 NORM>	170 ± 20	150 ± 20

[Reference]

1. The values obtained by calculation of data of S2-1. 4) and S2-2. 5) by the formula in Table 3-10 may be written in [SUB CON <4:3 H/V DELAY>] or [SUB CON <16:9 HV DELAY>].

Table 3-10

	14inch	20inch
SUB CON <4:3 H/V DELAY>	0.724 x SUB CON <4:3 NOR> -24	0.731 x SUB CON <4:3 NOR> -30
SUB CON <16:9 H/V DELAY>	0.724 x SUB CON <16:9 NOR> -24	0.731 x SUB CON <16:9 NOR> -30

4-3. 基板配置■

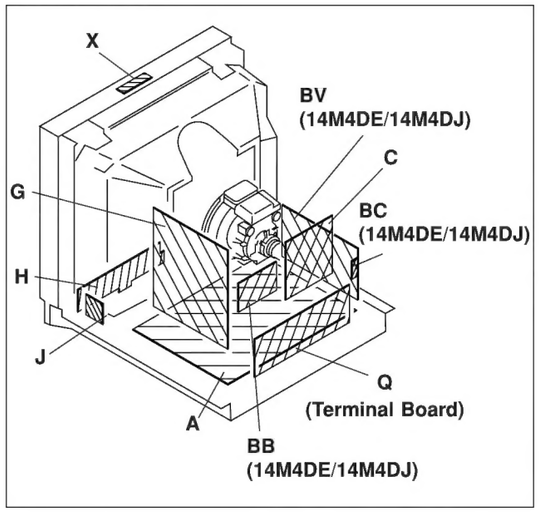

4-4. ■路■, プリント■

・耐圧表示のないコンデンサの電圧は50V。PF:mmF
・定格電力表示のない抵抗は5mmピッチ, 1/4Wを示す。
　単位はΩ（1MΩ=1000kΩ, kΩ=1000Ω）
・チップ抵抗の定格電力は1/10W。
・△　印は内蔵部品。
・ 印は不燃性抵抗。
・ 印はヒューズ抵抗。
・ は, パネル表示名称及び調整名称。
・半■定抵抗および可変抵抗器の特性カーブ(B) は省略。
・金属皮膜抵抗(: RN, : RN-CP) の1%, 0.50%規格は省略。
・⋈印の部品の定数は, X線量規制の規格を満足させるため, 製造時セット毎に確認し決定したものです。万一この部品を交換する場合は, セットに付いている部品と同一のものを御使用下さい。
　また■路■上の◪印の部品を交換した場合は, 指定された調整, 確認が必要です。確認の結果が指示した値と合致しない場合は, ⋈印の部品を交換し, 必ず指示した値と合致するように調整して下さい。(3-9(J)～3-10(J)ページの確認方法参照)

◪ 印部品	⋈ 確認調整
C512, C513, C523, C549, C592, D501, D533, IC500, IC507, Q500, Q511, R506, R508, R515, R516, R517, R518, R519, R551, R1536, R1537, R1560 .....A基板	R1536 (ホールドダウン)

・電圧値は, カラーバーゼネレータよりハイビジョンR.G.B. SYNC信号を受信したときの対アース間の参考値。
・電圧値の単位はV (ボルト)。
・ ：B＋ライン
・ ：B－ライン
・ ：主要信号経路を示す。
・ ＊　：測定不能。
・無印：14G1J/14G5J及び共通
　(　)：20G1J
・BV基板の１次側の電圧は省略。
・○数字は波形表の番号。

リファレンス情報

抵抗	: RN	金属皮膜
	: RC	ソリッド
	: FPRD	不燃性カーボン
	: FUSE	不燃性ヒューズ
	: RS	不燃性酸金
	: RB	不燃性セメント
	: RW	不燃性巻線
コイル	: LF-8L	マイクロインダクタ
コンデンサ	: TA	タンタル
	: PS	スチロール
	: PP	ポリプロピレン
	: PT	マイラ
	: MPS	メタライズドポリエステル
	: MPP	メタライズドポリプロピレン
	: ALB	バイポーラ
	: ALT	高温用
	: ALR	ハイリップル

⚠印の部品は, 安全性を維持するために, 重要な部品です。従って交換時は, 必ず指定の部品を使用して下さい。

4-3. Circuit Boards Location

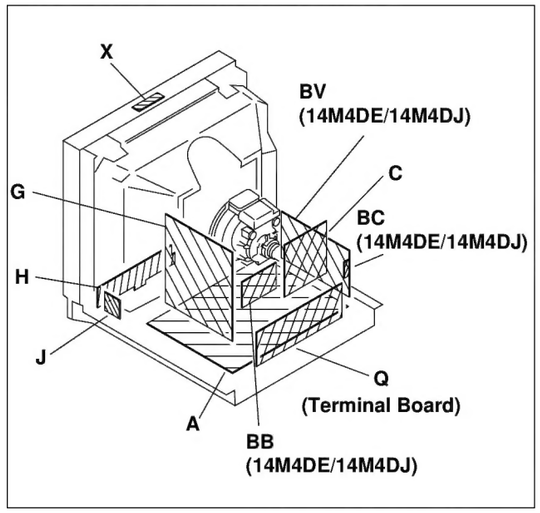

4-4. Printed Wiring Boards and Schematic Diagrams

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50WV are not indicated.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm Rating electrical power 1/4W

- Chips resistors are 1/10W.
- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- △ : internal component, and adjustment for repair.
- : panel designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- METAL FILM (:RN, :RN-CP) resistors in 1%, 0.50%, 1/4W unless otherwise specified.
- The components identified by ⋈ in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation.
  Should replacement be required, replace only with the value originally used.
- When replacing components identified by ◪, make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by ⋈ and repeat the adjustment until the specified value is achieved.
  (Refer to ⋈ R1536 adjust on page 3-9(E), 3-10(E))
- When replacing the part in below table be sure to parform the related adjustment.

Part replaced (◪)	Adjustment (⋈)
C512, C513, C523, C549, C592, D501, D533, IC500, IC507, Q500, Q511, R506, R508, R515, R516, R517, R518, R519, R551, R1536, R1537, R1560 ..... (A BOARD)	R1536 (HOLD-DOWN)

- All voltages are in V.
- Voltage are dc with respect to ground unless otherwise noted.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerance.
- : B+ bus.
- : B- bus.
- : signal path.
- ＊ : Can not be measured.
- No mark : with PAL color-bar signal received or common voltage.
- For the respective voltage raltage in SECAM, NTSC 3.58, NTSC 4.43, S-VIDEO, and ANALOG RGB modes, see the table.
- BV BOARD is non signal.
- Circled numbers are waveform references.

Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RW	NONFLAMMABLE WIREWOUND
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

Note:
The components identified by mark ⚠ are critical for safety. Replace only with the part number specified.

A (MICRO COMPUTER, R.G.B MATRIX, ON/OFF MUTE, VOL OFF SW), (DAC, ON SCREEN DISPLAY, BLACK SAMPLING, R.G.B SW), (SYSTEM SW, HOLD AMP, SYNC SELECT, R/R-Y, B/B-Y, G/Y SW), (CHROMA DEMOD, AUDIO SELECT, SYSTEM SW, R/R-Y, B/B-Y, G/Y SW), (HV OUT, H/V OUT, DEFLECTION SYSTEM, AUDIO OUT), (HV OUT, MONO MULTI) BOARD

NOTE:
The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.

— A BOARD — <A side>

D101	B-9	Q201	A-5
D102	B-9	Q301	F-7
D103	B-9	Q302	G-9
D107	B-9	Q303	G-6
D111	B-9	Q305	F-7
D115	B-9	Q306	F-7
D116	F-2	Q307	G-7
D200	A-4	Q309	G-7
D301	G-7	Q310	G-7
D303	E-7	Q312	G-7
D304	F-6	Q313	G-8
D307	F-8	Q315	G-8
D309	G-8	Q318	G-7
D310	G-8	Q319	F-6
D311	G-9	Q321	F-8
D315	E-8	Q322	F-6
D317	D-9	Q323	G-9
D320	D-9	Q325	F-8
D322	D-9	Q326	E-6
D323	C-9	Q327	E-5
D324	E-8	Q328	G-9
D325	C-8	Q329	G-9
D326	E-9	Q330	F-8
D333	D-8	Q331	F-8
D337	E-8	Q332	G-9
D344	D-7	Q333	D-9
D345	E-7	Q334	E-9
D346	E-6	Q336	E-9
D347	E-6	Q337	E-9
D363	E-8	Q338	C-8
D364	E-8	Q339	D-8
D401	B-6	Q345	D-7
D404	D-5	Q349	E-8
D405	B-5	Q350	D-8
D406	B-5	Q351	D-7
D407	D-7	Q352	C-7
D410	C-5	Q355	F-5
D411	B-6	Q361	F-8
D421	C-5	Q363	G-9
D422	C-5	Q364	D-8
D425	C-5	Q367	E-8
D427	B-6	Q368	E-7
D500	G-4	Q369	E-8
D501	F-2	Q401	B-6
D502	D-2	Q402	B-6
D503	D-2	Q403	B-5
D504	D-2	Q405	C-5
D505	E-1	Q407	C-6
D506	D-2	Q409	D-6
D507	G-4	Q417	C-5
D508	F-4	Q418	B-5
D509	G-5	Q419	B-6
D510	F-5	Q420	C-6
D512	D-1	Q421	B-5
D513	E-5	Q422	B-5
D514	E-4	Q423	C-5
D515	F-1	Q424	C-5
D516	E-5	Q428	D-6
D517	D-4	Q431	B-5
D518	E-5	Q434	C-5
D519	C-4	Q439	C-6
D523	A-2	Q443	C-5
D524	C-2	Q444	B-5
D525	C-2	Q448	F-9
D526	B-4	Q500	F-2
D527	B-3	Q501	C-2
D528	A-1	Q502	D-3
D529	A-2	Q505	E-5
D530	A-1	Q506	B-4
D531	B-4	Q507	E-5
D532	B-4	Q508	C-4
D533	G-2	Q509	G-5
D534	B-4	Q510	B-3
D536	A-4	Q511	F-2
D539	A-1	Q513	A-1
D542	B-3	Q514	B-4
D546	E-1	Q515	A-2
D548	G-2	Q516	C-4
		Q517	C-4
IC101	A-8	Q519	B-3
IC108	A-8	Q520	B-4
IC200	A-5	Q522	E-5
IC303	E-9	Q524	A-4
IC404	D-6	Q525	A-4
IC500	G-3	Q526	G-4
IC505	E-4	Q527	E-1
IC507	D-4	Q531	G-2
		Q532	G-2
Q101	A-8		
Q111	C-9	RV501	B-2
Q113	A-7		
Q114	A-8		
Q200	A-4		

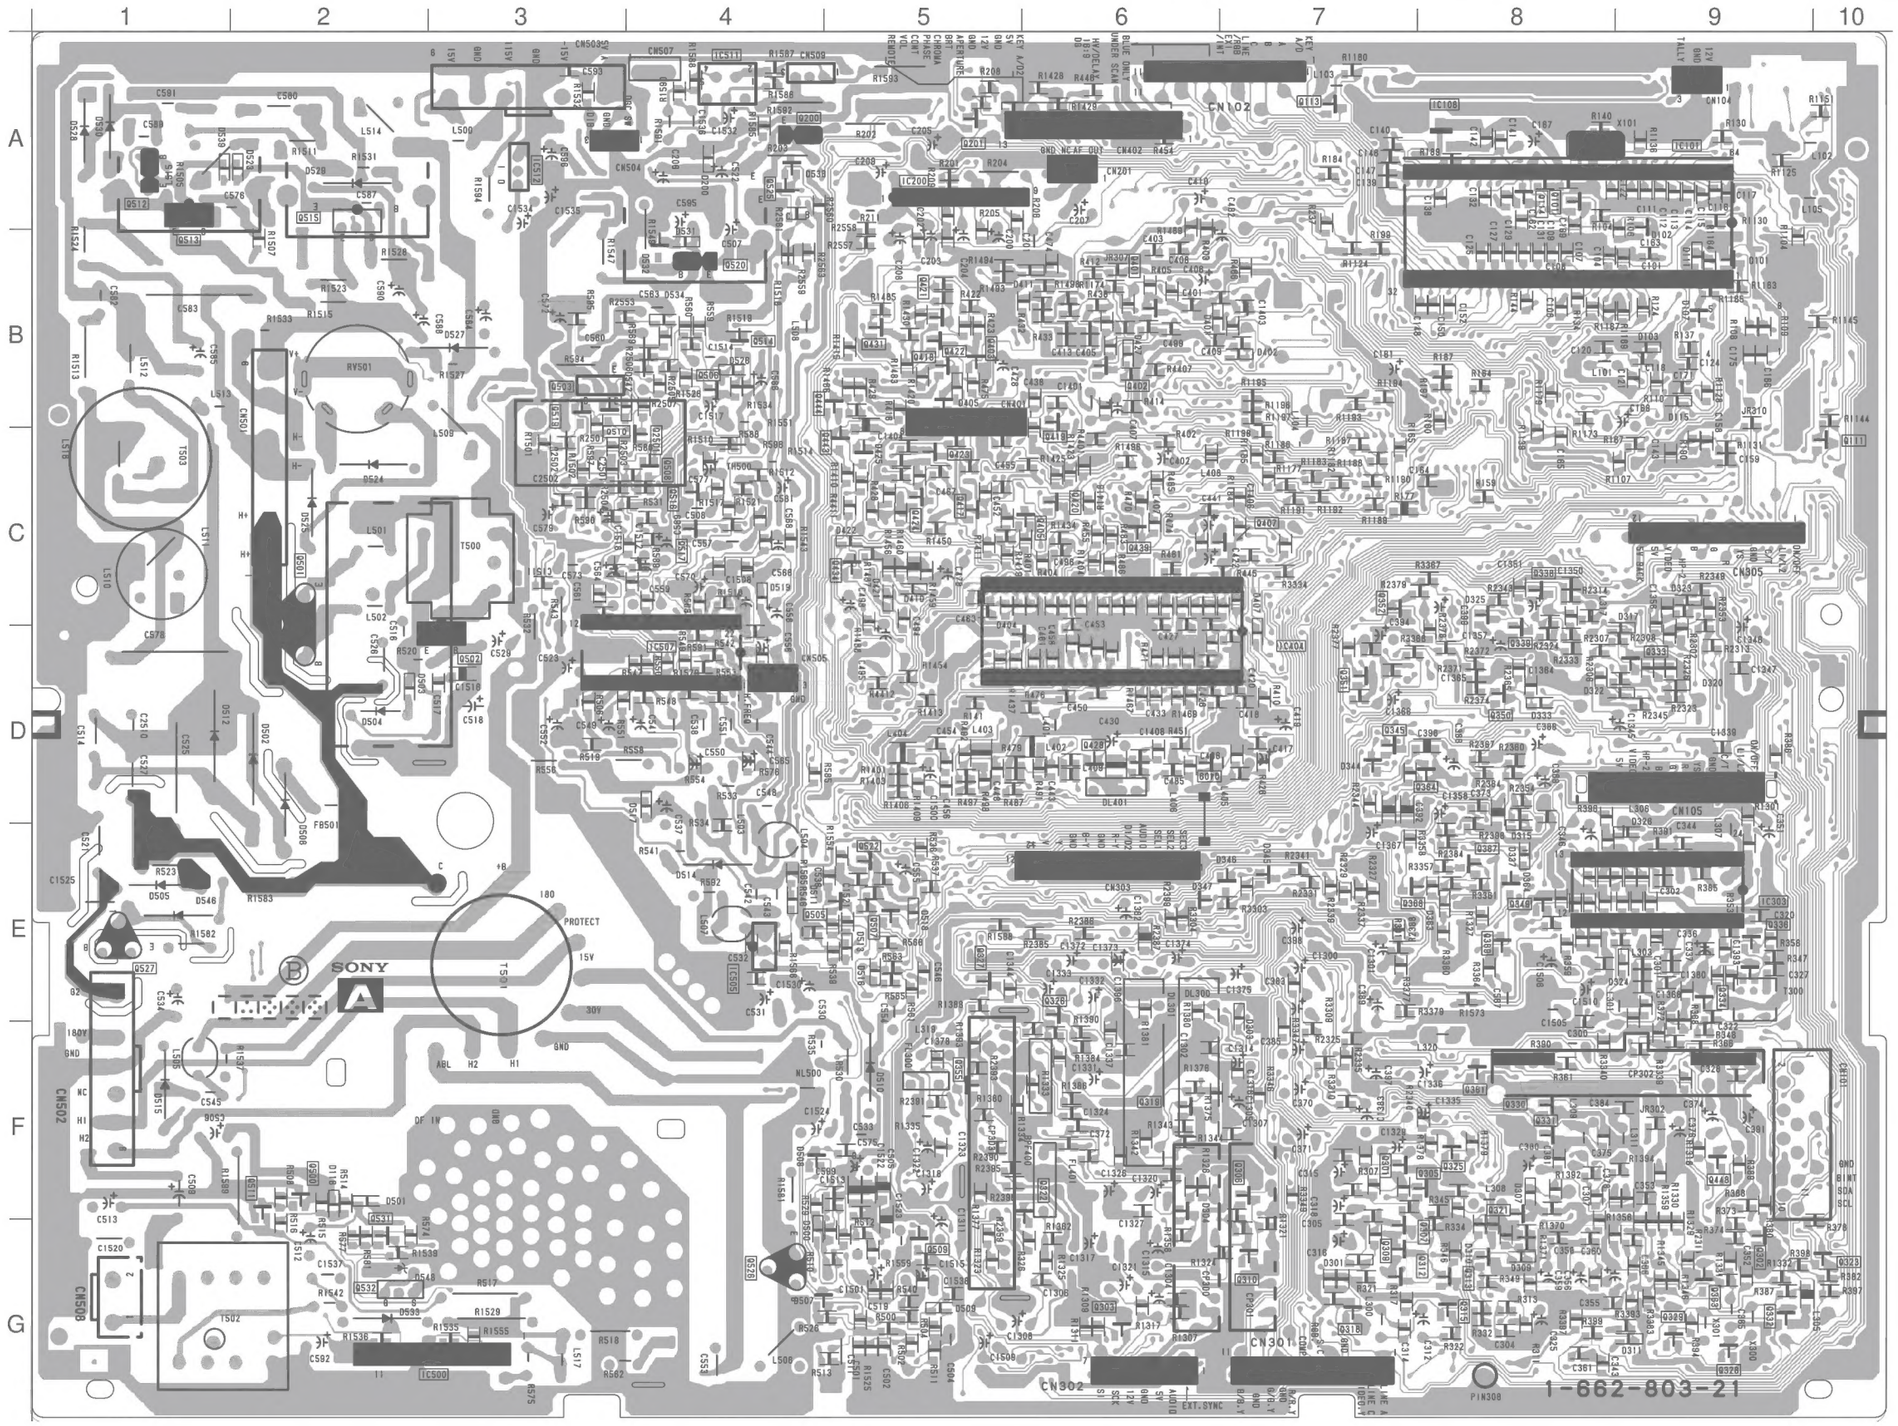

— A BOARD — <B side>

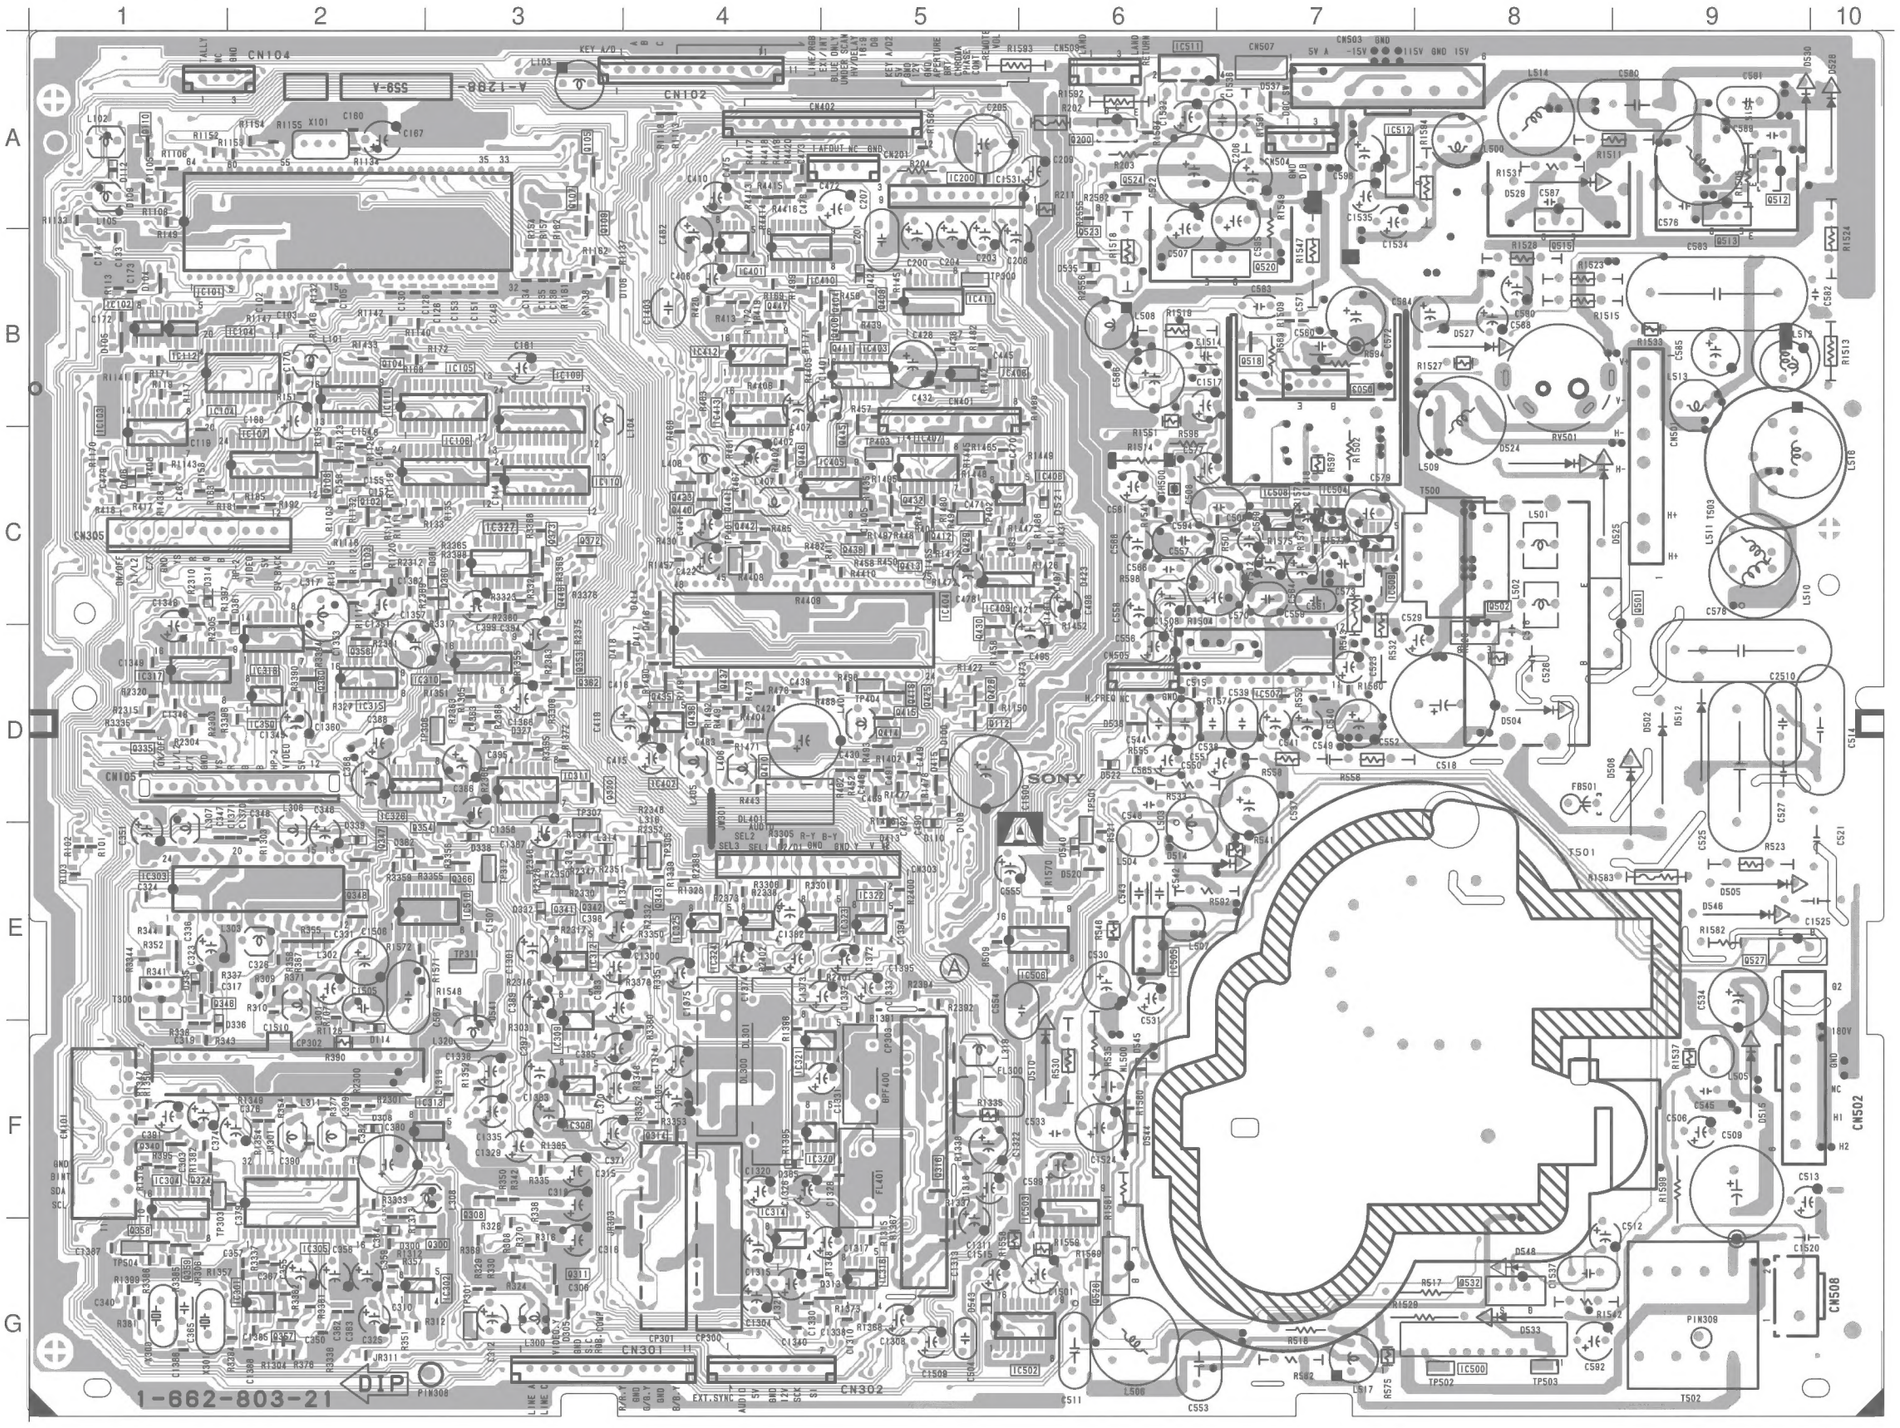

D100	D-5	IC502	G-5
D104	B-1	IC503	F-6
D105	B-1	IC504	C-7
D108	D-5	IC506	E-6
D109	A-1	IC508	C-7
D114	F-2	IC509	C-7
D300	G-2	IC510	C-5
D305	G-3		
D308	F-2	Q102	C-2
D313	G-4	Q103	C-2
D314	C-1	Q104	B-2
D327	D-3	Q105	A-3
D332	E-3	Q107	A-3
D335	E-1	Q108	C-2
D336	F-1	Q109	A-3
D338	E-3	Q110	A-1
D339	E-2	Q112	D-5
D360	C-3	Q300	G-2
D361	C-3	Q308	F-3
D362	E-2	Q311	G-3
D365	F-4	Q314	F-4
D381	C-2	Q316	F-5
D408	B-5	Q320	D-3
D414	C-4	Q324	F-1
D415	D-5	Q335	D-1
D416	C-4	Q341	E-3
D417	D-4	Q342	E-3
D418	D-4	Q343	E-4
D423	C-6	Q346	E-1
D424	B-5	Q347	E-2
D520	E-6	Q348	E-2
D521	C-6	Q353	D-3
D522	D-6	Q354	E-3
D535	B-6	Q356	D-2
D537	A-7	Q357	G-2
D538	D-6	Q358	G-1
D540	E-6	Q359	G-1
D543	G-5	Q360	D-2
D544	F-6	Q362	D-3
D545	F-6	Q366	E-3
		Q372	C-3
IC102	B-1	Q404	B-4
IC103	C-1	Q406	B-4
IC104	B-2	Q408	B-5
IC105	B-3	Q410	D-4
IC106	C-3	Q411	B-5
IC107	C-2	Q412	C-5
IC109	B-3	Q413	C-5
IC110	C-3	Q414	D-5
IC111	B-2	Q415	D-5
IC112	B-1	Q416	D-5
IC301	G-2	Q425	D-5
IC302	G-2	Q426	D-5
IC304	F-1	Q429	C-5
IC305	F-2	Q430	D-5
IC306	F-3	Q432	C-5
IC309	F-3	Q433	C-4
IC310	D-3	Q435	D-4
IC311	D-3	Q436	D-4
IC312	E-3	Q437	D-4
IC313	F-2	Q438	C-5
IC314	G-4	Q440	C-4
IC315	D-2	Q441	C-4
IC316	G-5	Q442	C-4
IC317	D-1	Q445	B-5
IC318	D-2	Q446	C-4
IC320	F-4	Q447	B-4
IC321	F-4	Q449	C-3
IC322	E-5	Q518	B-7
IC323	E-4	Q523	B-6
IC324	E-4		
IC325	E-4		
IC326	D-2		
IC327	C-3		
IC350	D-2		
IC401	B-4		
IC402	D-4		
IC403	B-5		
IC405	C-5		
IC406	B-5		
IC407	C-5		
IC408	C-5		
IC409	C-5		
IC410	B-4		
IC411	B-5		
IC412	B-4		
IC413	B-4		

- **A BOARD (1/10) (MICRO COMPUTER, MICRO COMPUTER RESET) DIAGRAM**
- **Refer to Printed Wiring Board**
- **Refer to page 4-40 (O/M M : 9-922-666-01) for Respective Voltage Ratings**
- **Refer to page 4-43 (O/M M : 9-922-666-01) for Waveforms**
- **Refer to page 4-45 (O/M M : 9-922-666-01) for IC Block Diagrams**

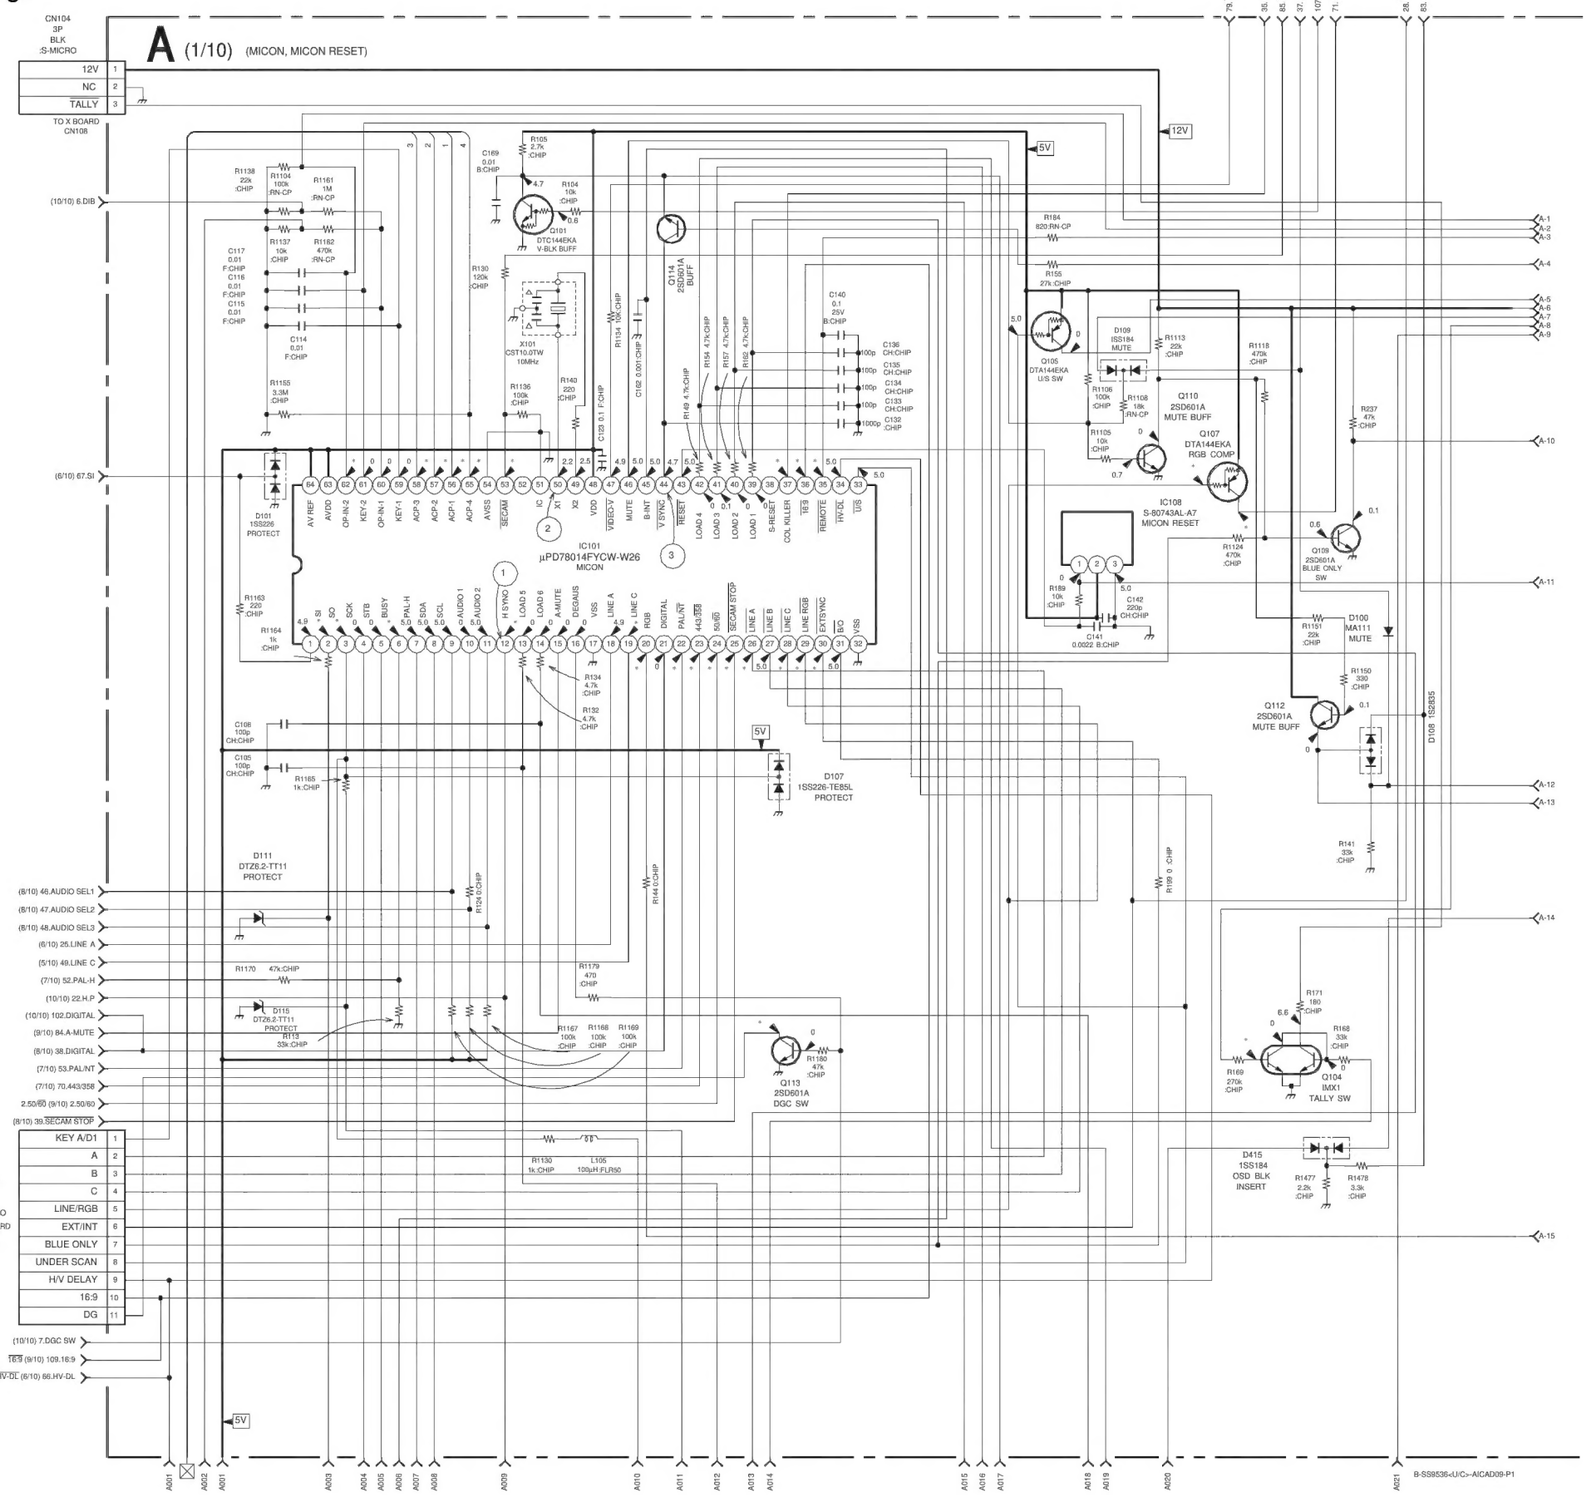

• A BOARD (2/10) (R.G.B MATRIX, VOL OFF SW, ON/OFF GAIN CONT, AMP) DIAGRAM

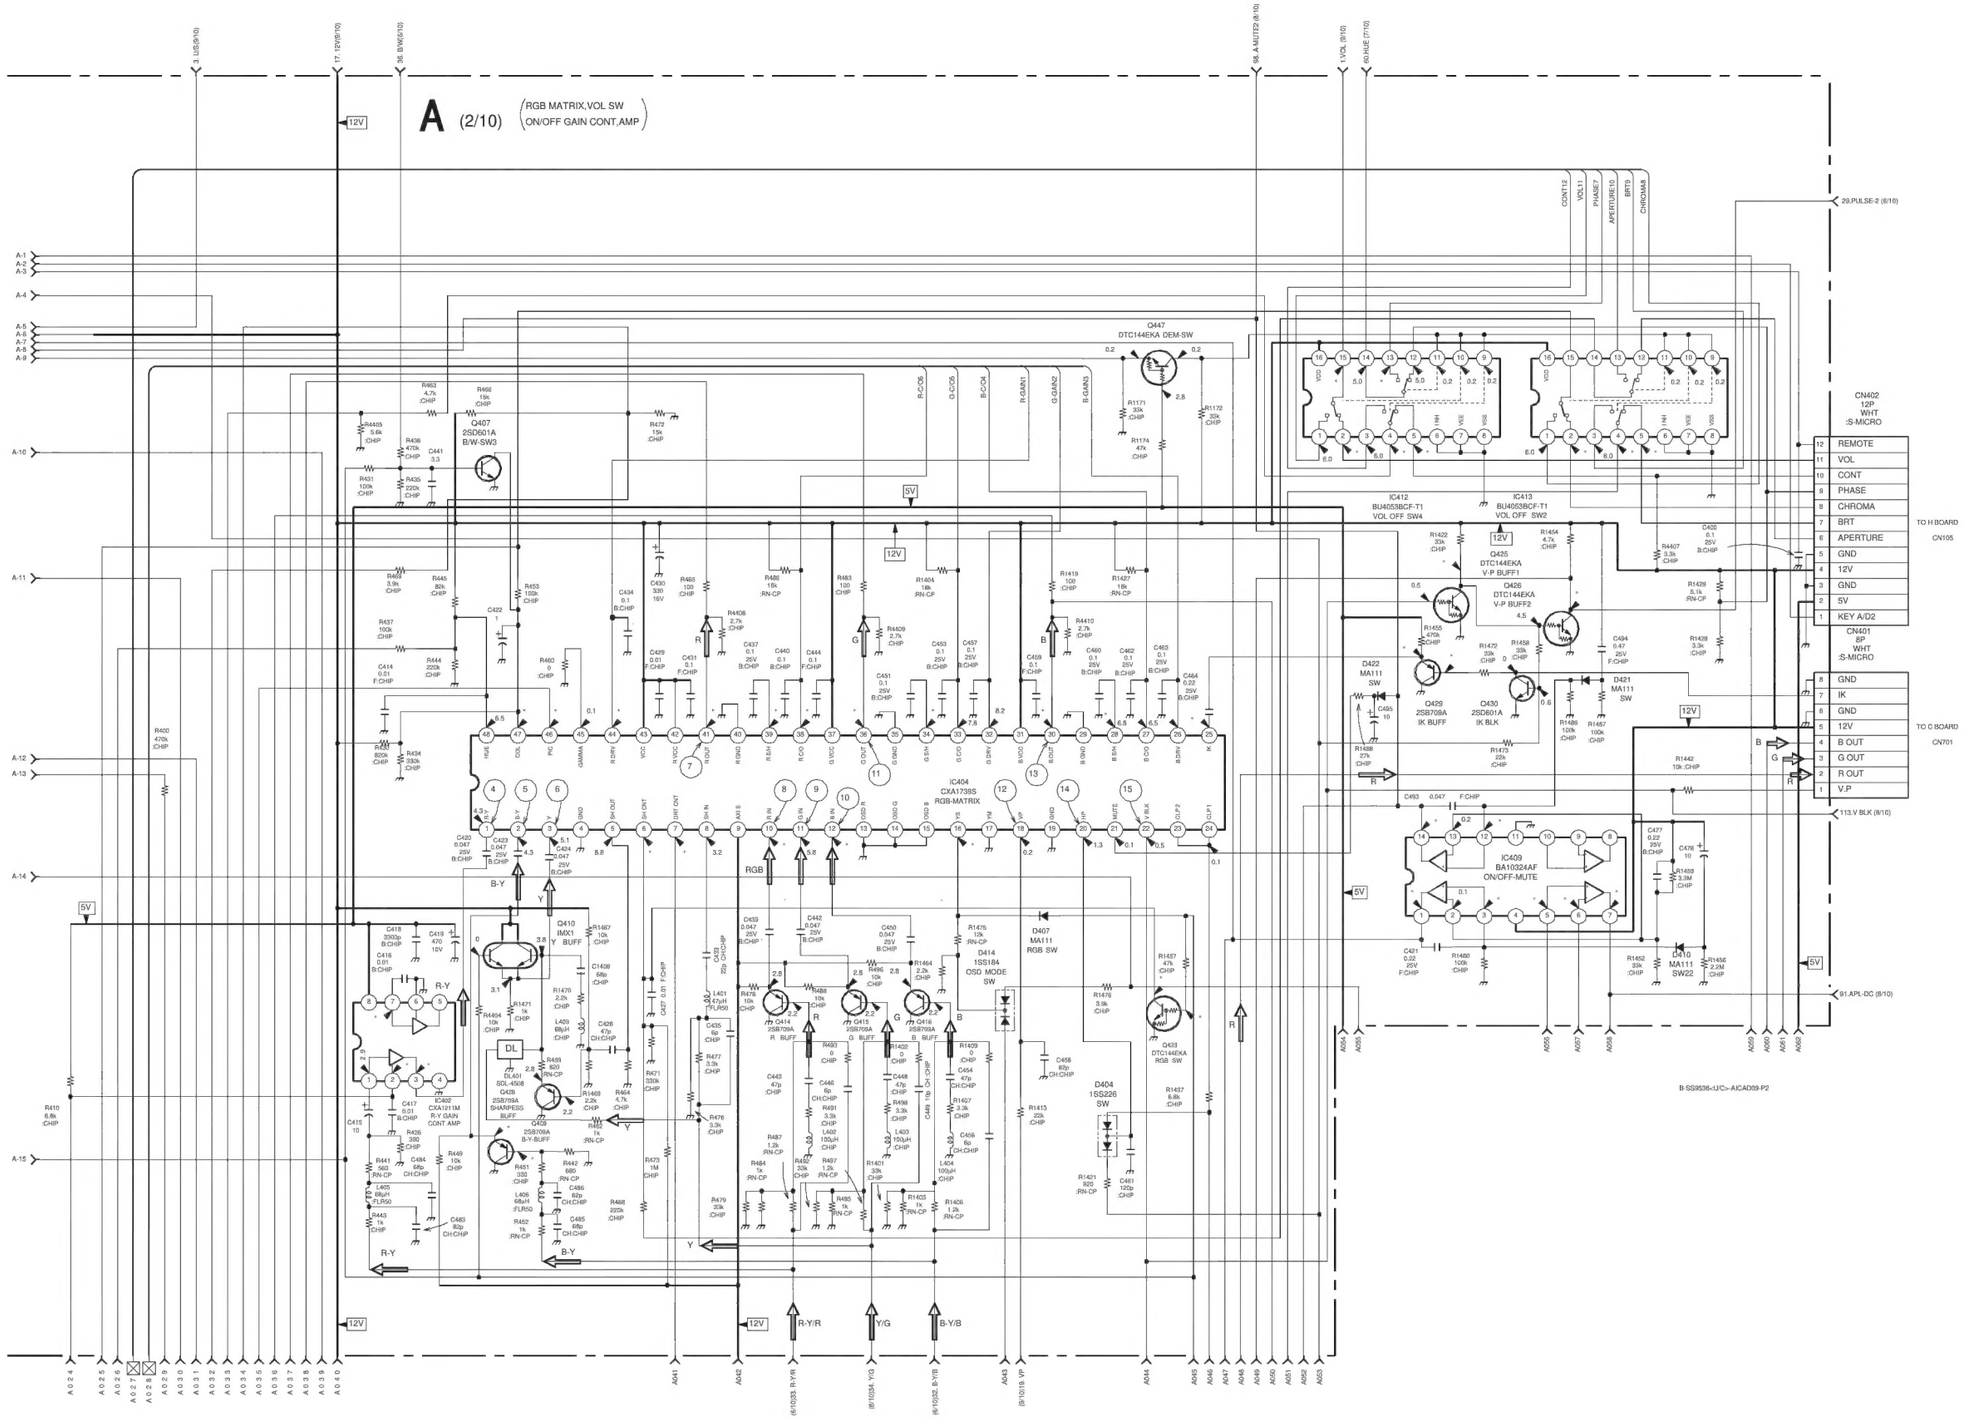

- **A BOARD (3/10) (NVM, DAC, EX OR, ON SCREEN DISPLAY) DIAGRAM**
- **Refer to Printed Wiring Board**
- **Refer to page 4-41 (O/M M : 9-922-666-01) for Respective Voltage Ratings**
- **Refer to page 4-42 (O/M M : 9-922-666-01) for Waveforms**
- **Refer to page 4-45 (O/M M : 9-922-666-01) for IC Block Diagrams**

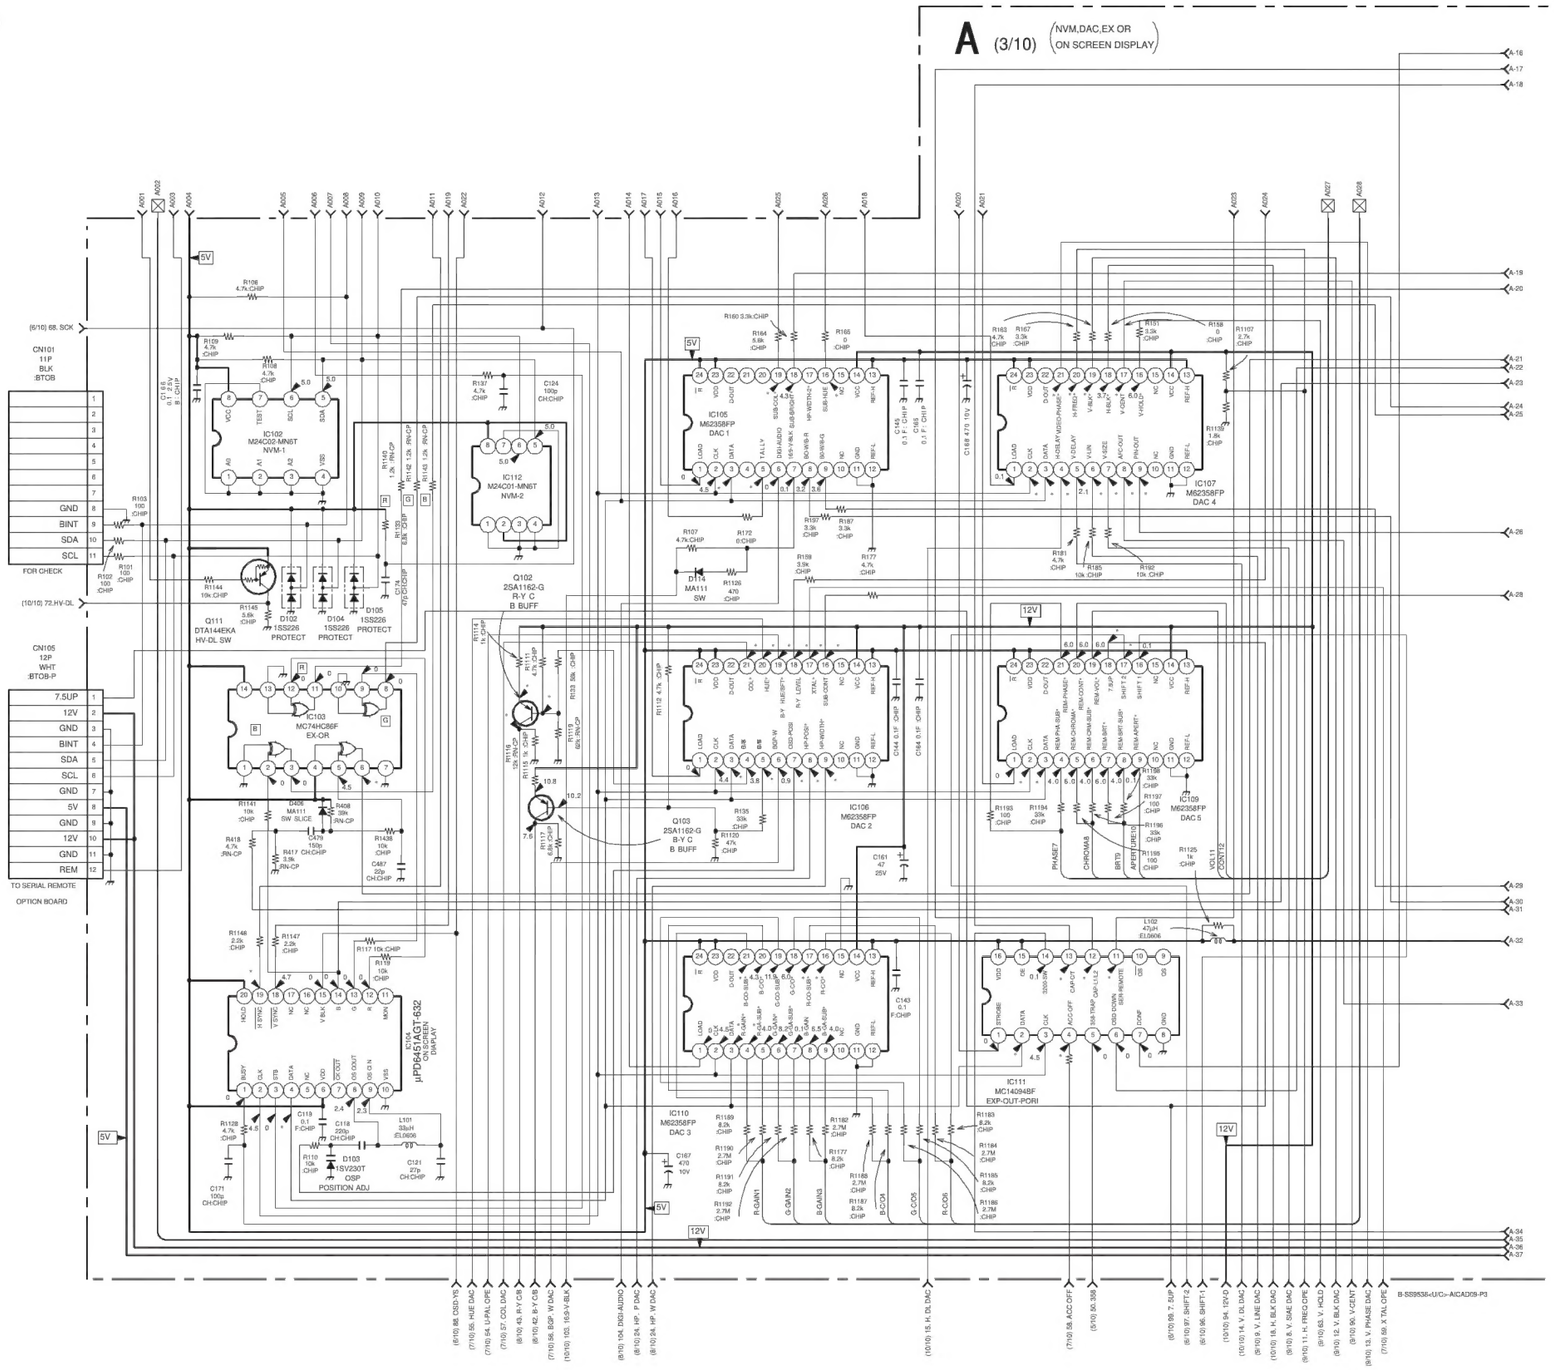

• A BOARD (4/10) (BLACK SAMPLING, R.G.B SW) DIAGRAM

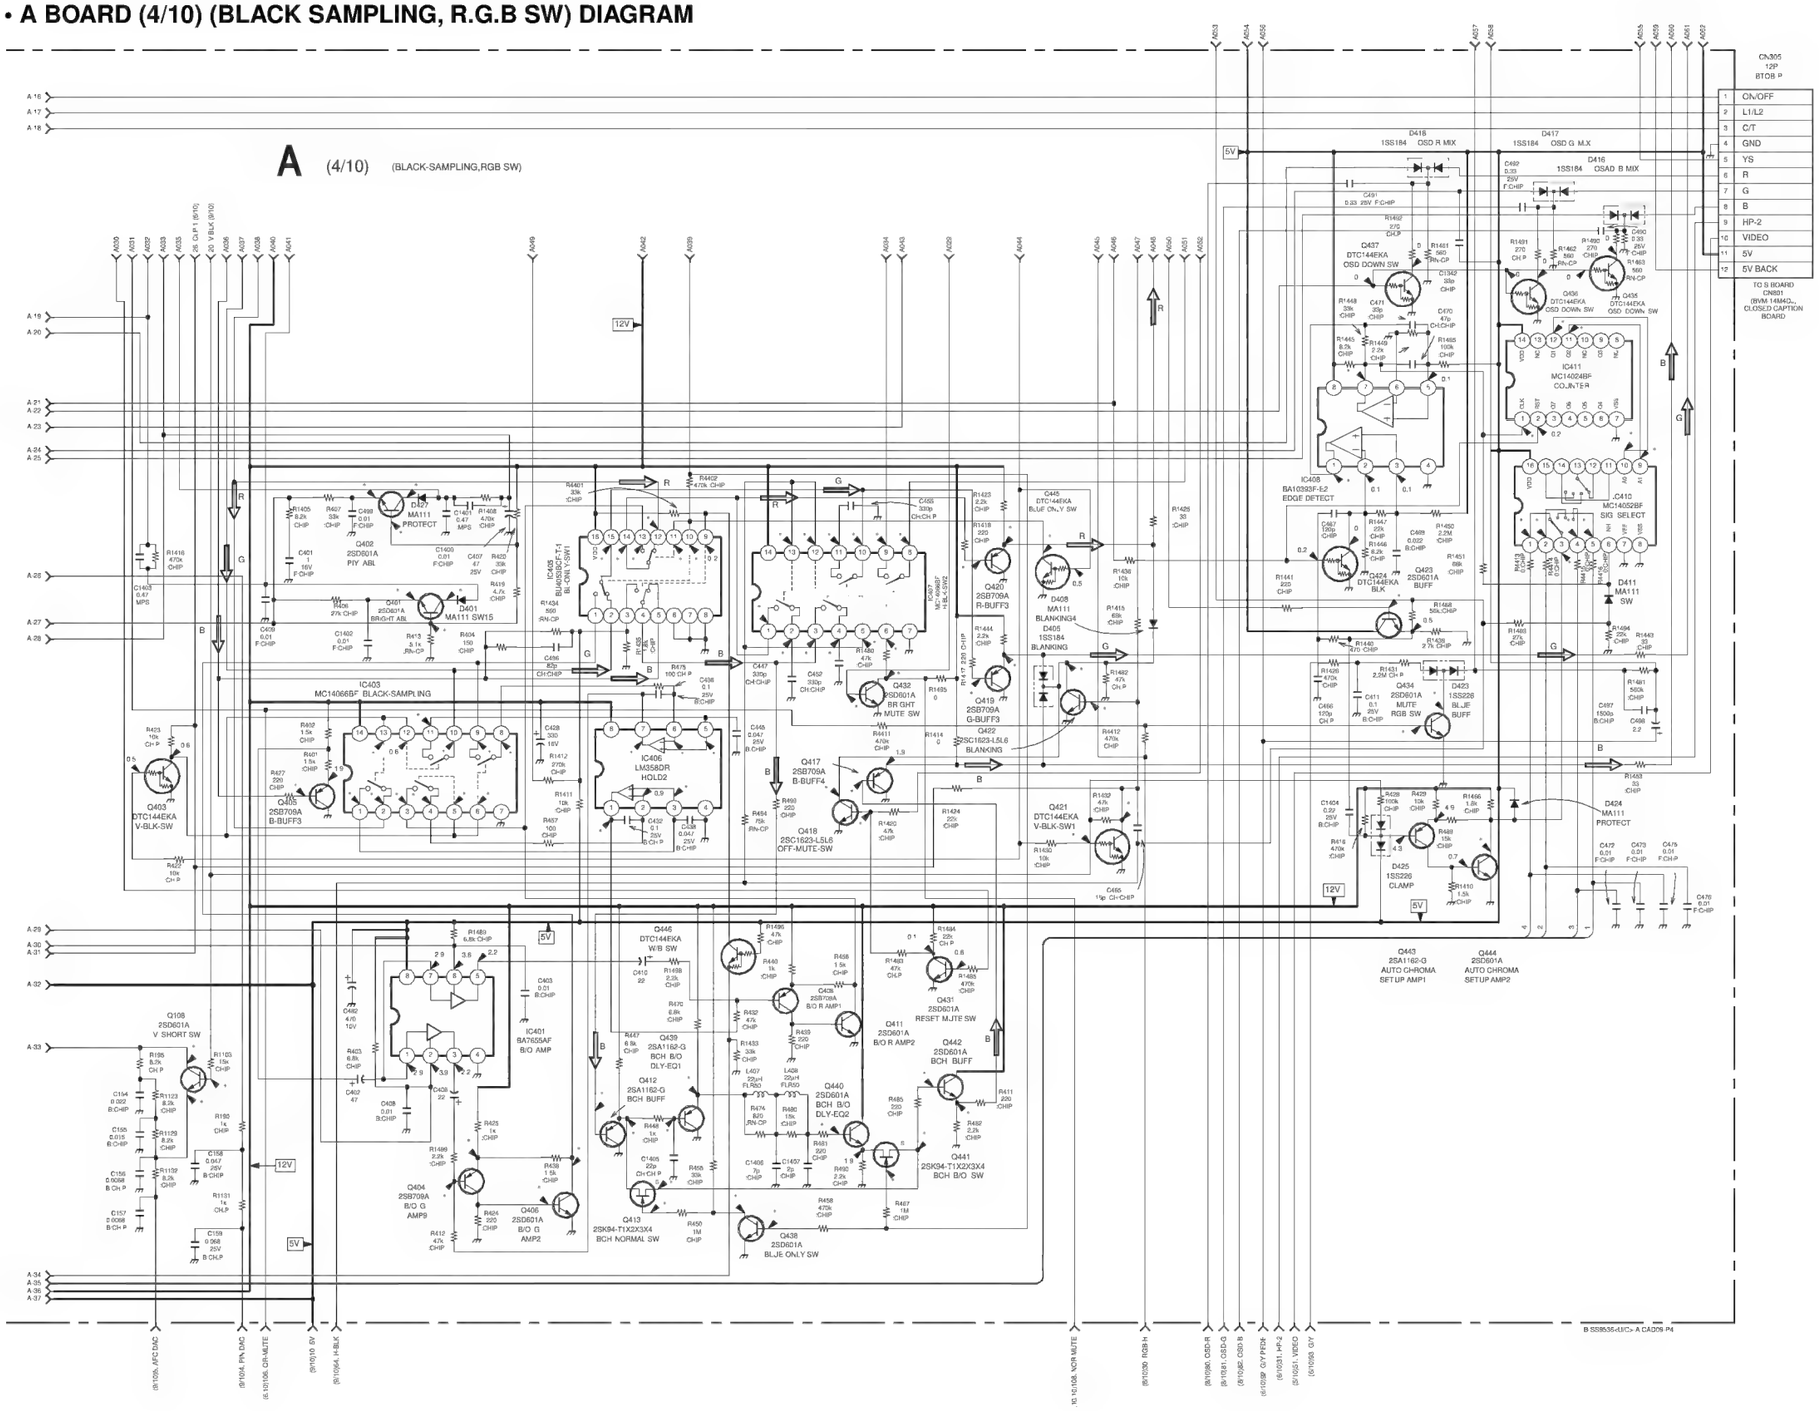

- **A BOARD (5/10) (CHROMA SELECT, YDL SW, SYNC SELECT) DIAGRAM**
- **Refer to Printed Wiring Board**
- **Refer to page 4-42 (O/M M : 9-922-666-01) for Respective Voltage Ratings**
- **Refer to page 4-42, 43 (O/M M : 9-922-666-01) for Waveforms**

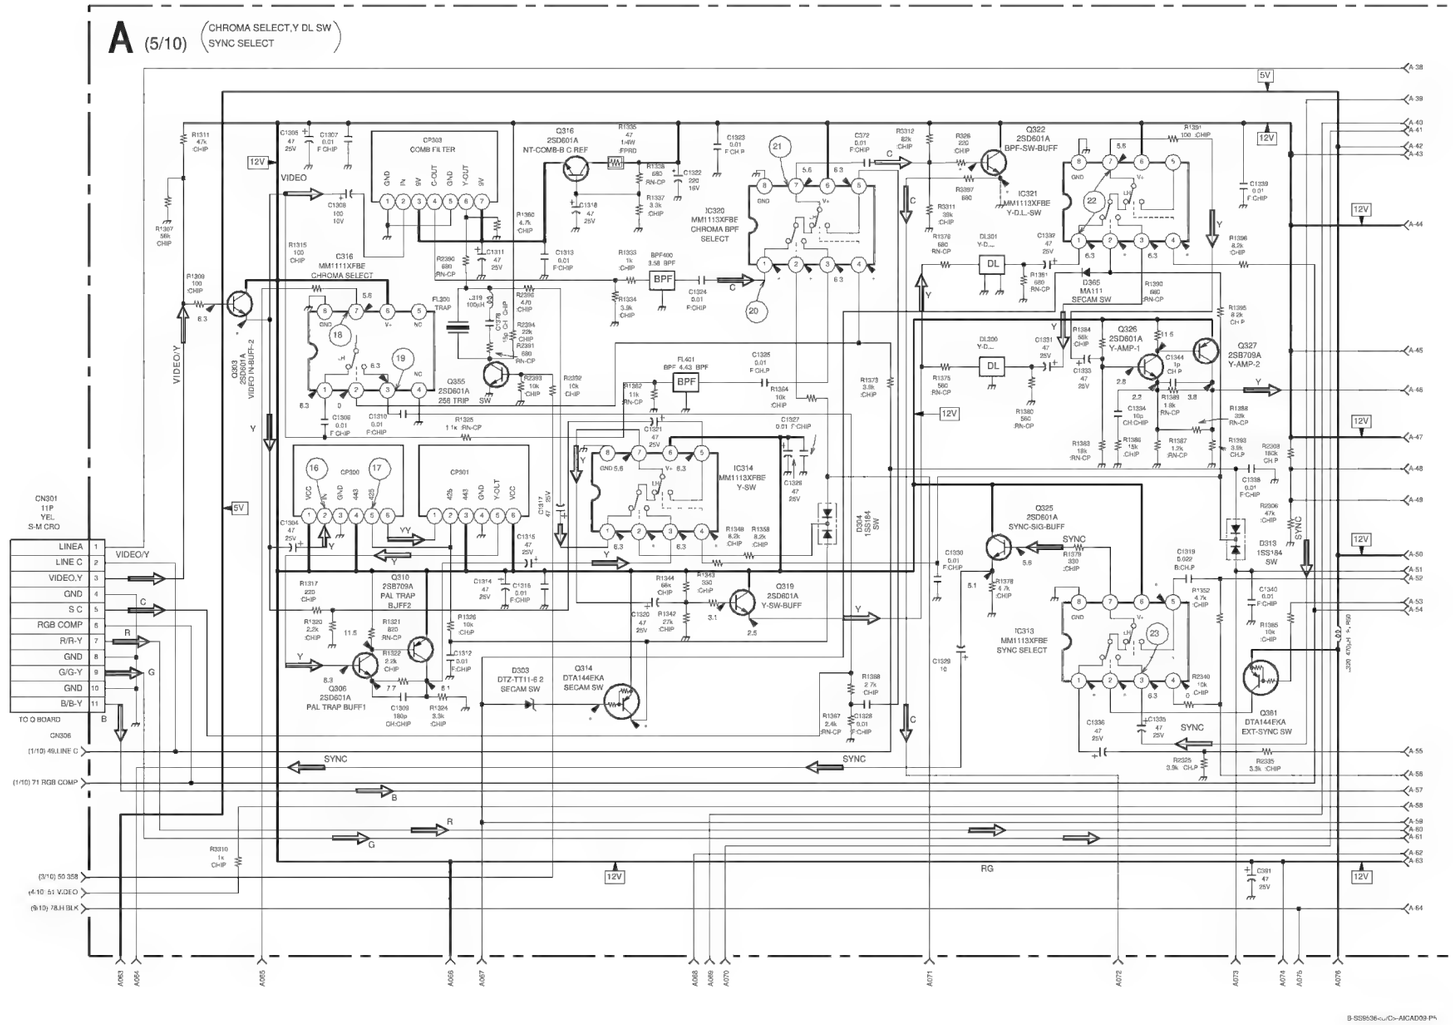

• A BOARD (6/10) (SELECT SW, SYSTEM AMP, R/R-Y, B/B-Y, G/Y SW) DIAGRAM

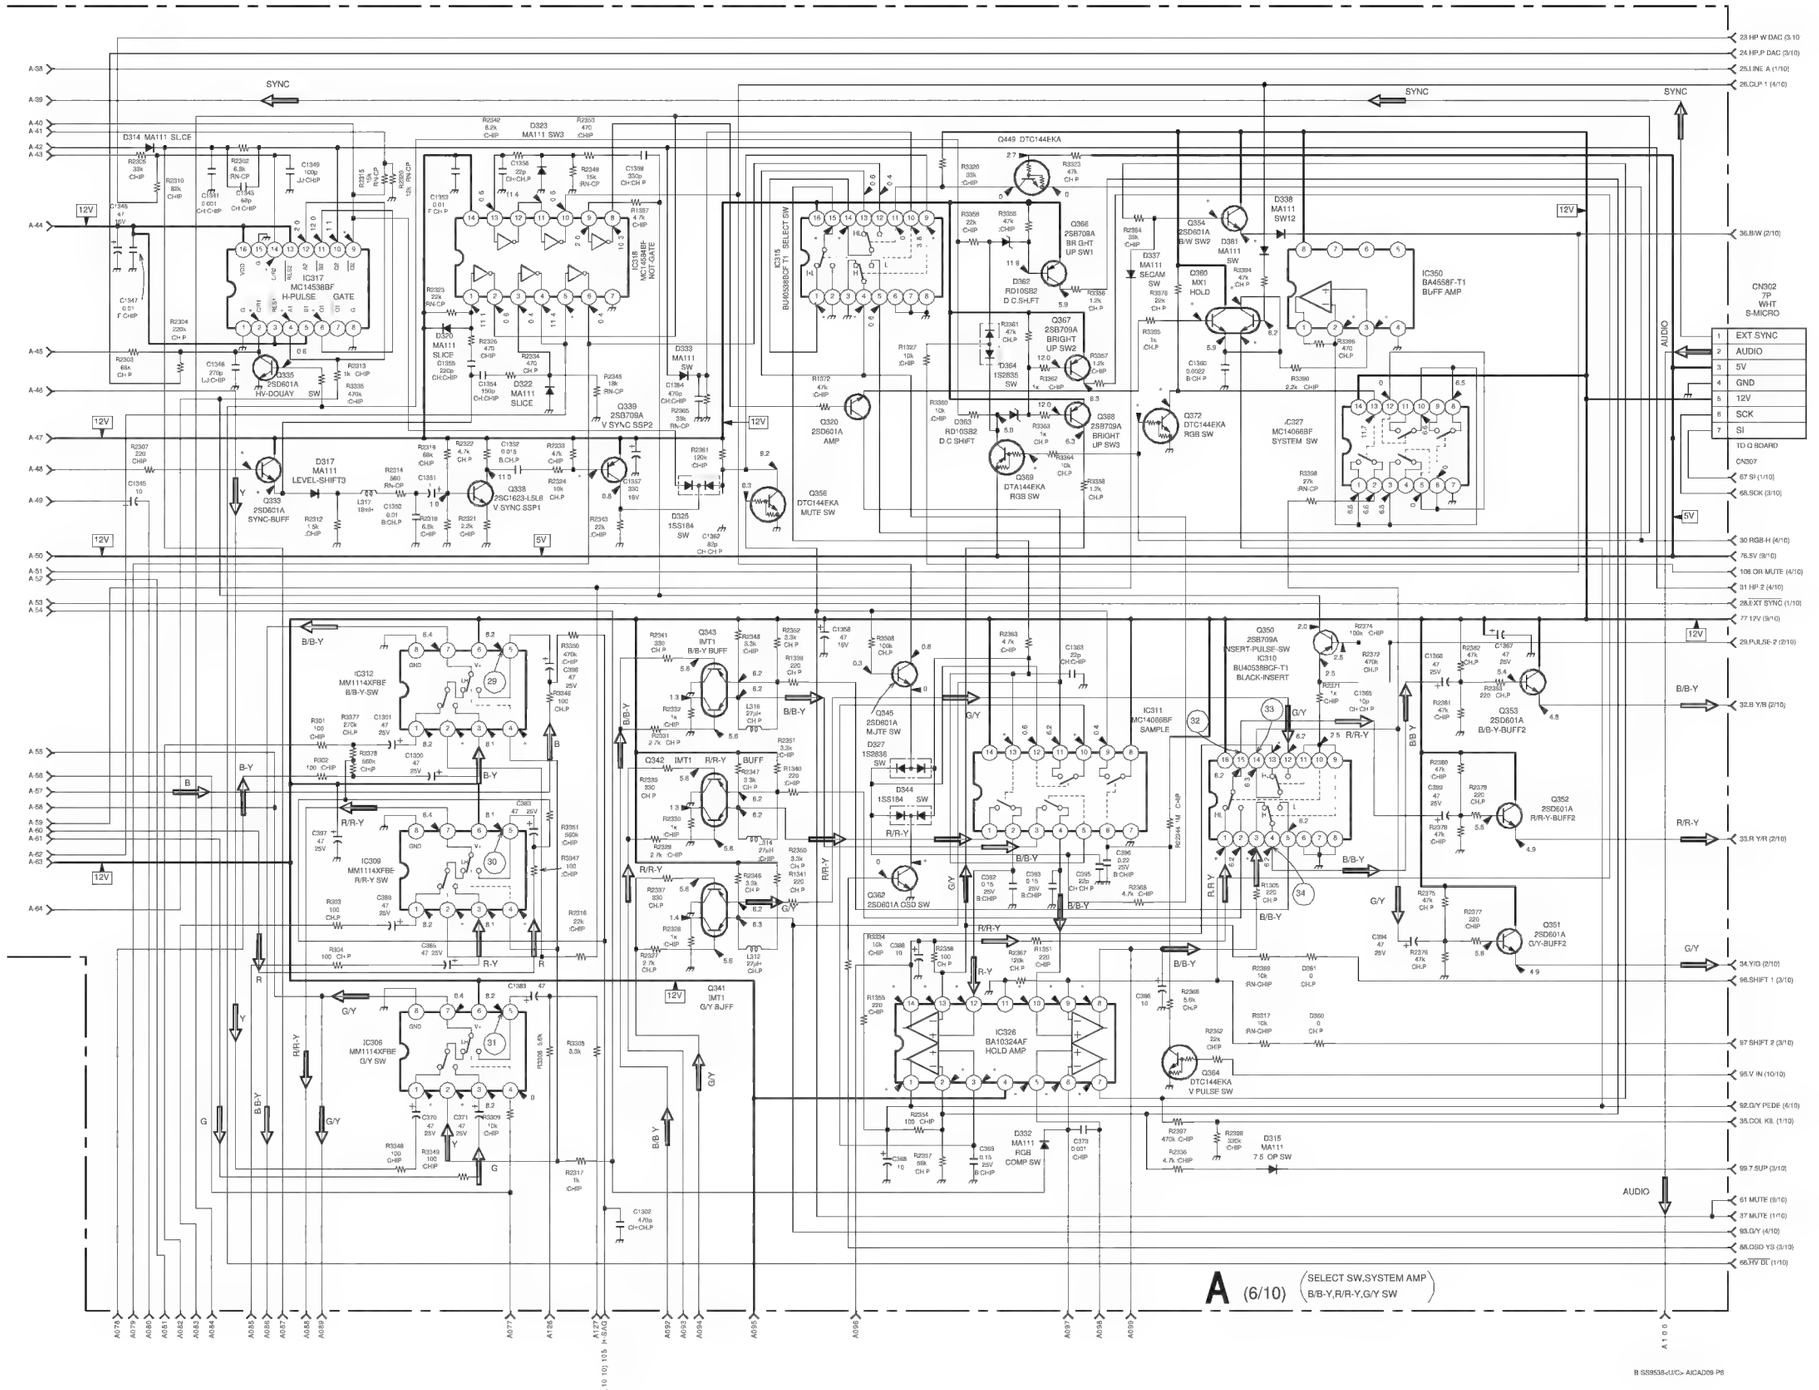

- **A BOARD (7/10) (SYSTEM SW, CHROMA DEMOD, PAL U/V, ACC OFF GAIN CONT, AMP) DIAGRAM**
- **Refer to Printed Wiring Board**
- **Refer to page 4-42 (O/M M : 9-922-666-01) for Respective Voltage Ratings**
- **Refer to page 4-42, 43 (O/M M : 9-922-666-01) for Waveforms**
- **Refer to page 4-45 (O/M M : 9-922-666-01) for IC Block Diagrams**

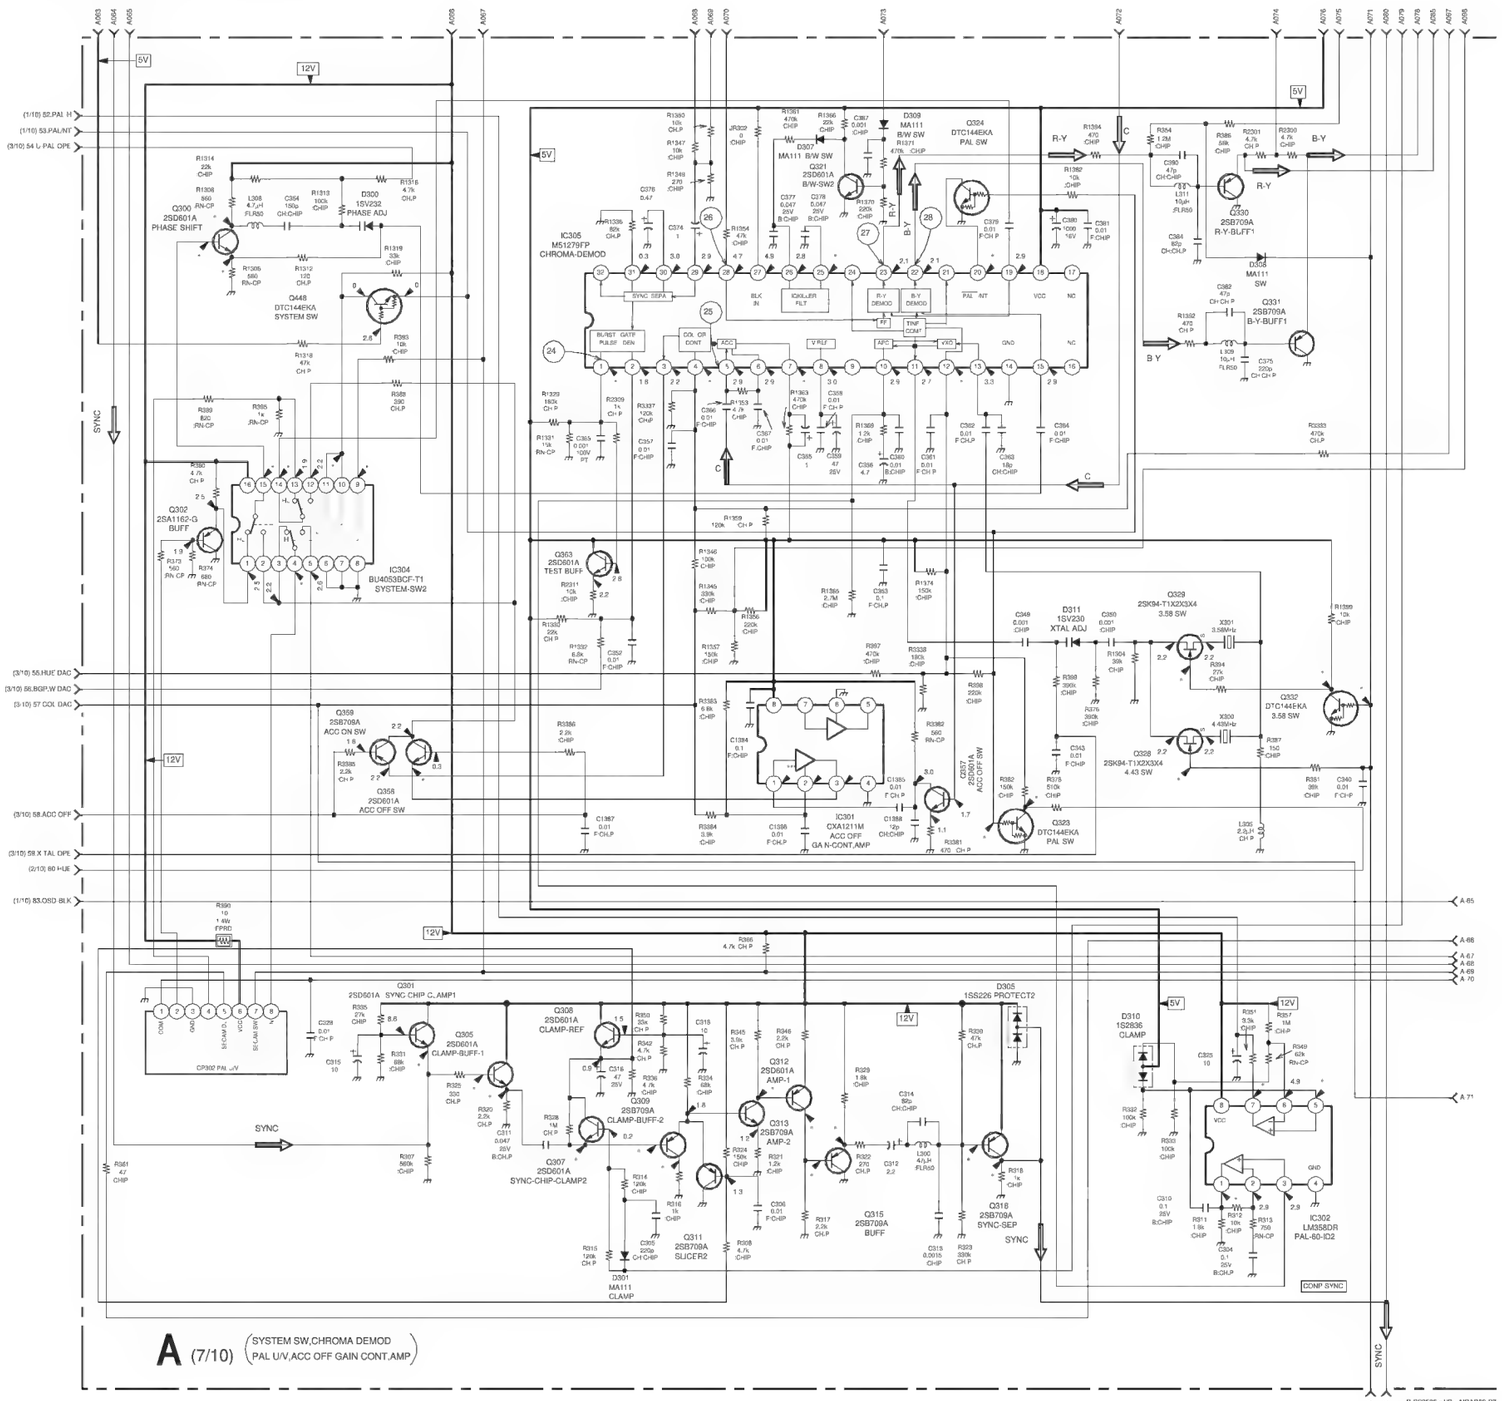

• A BOARD (8/10) (SECAM DECODER, SYNC SELECT, R/R-Y, B/B-Y, G/Y SW, AUDIO SELECT) DIAGRAM

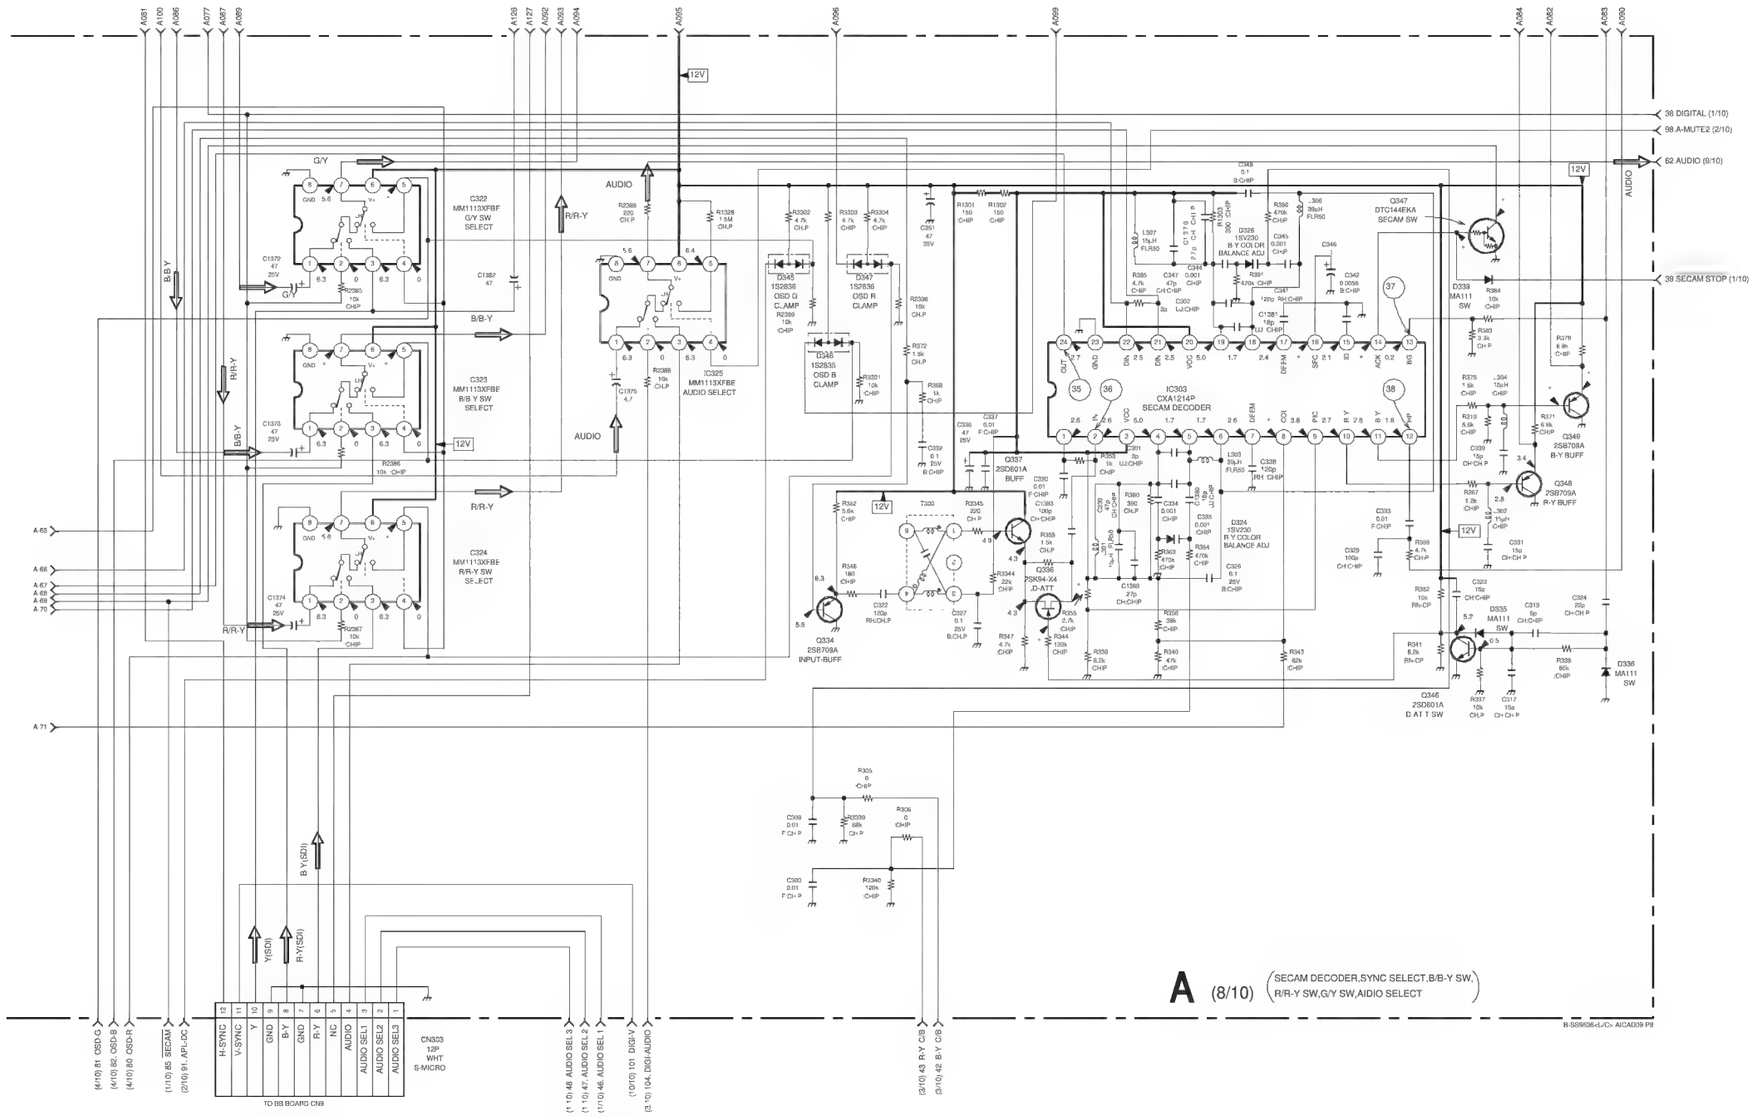

- **A BOARD (9/10) (V OUT, D.F OUT, DEFLECTION SYSTEM, AUDIO OUT) DIAGRAM**
- **Refer to Printed Wiring Board**
- **Refer to page 4-44 (O/M M : 9-922-666-01) for Waveforms**
- **Refer to page 4-45 (O/M M : 9-922-666-01) for IC Block Diagrams**

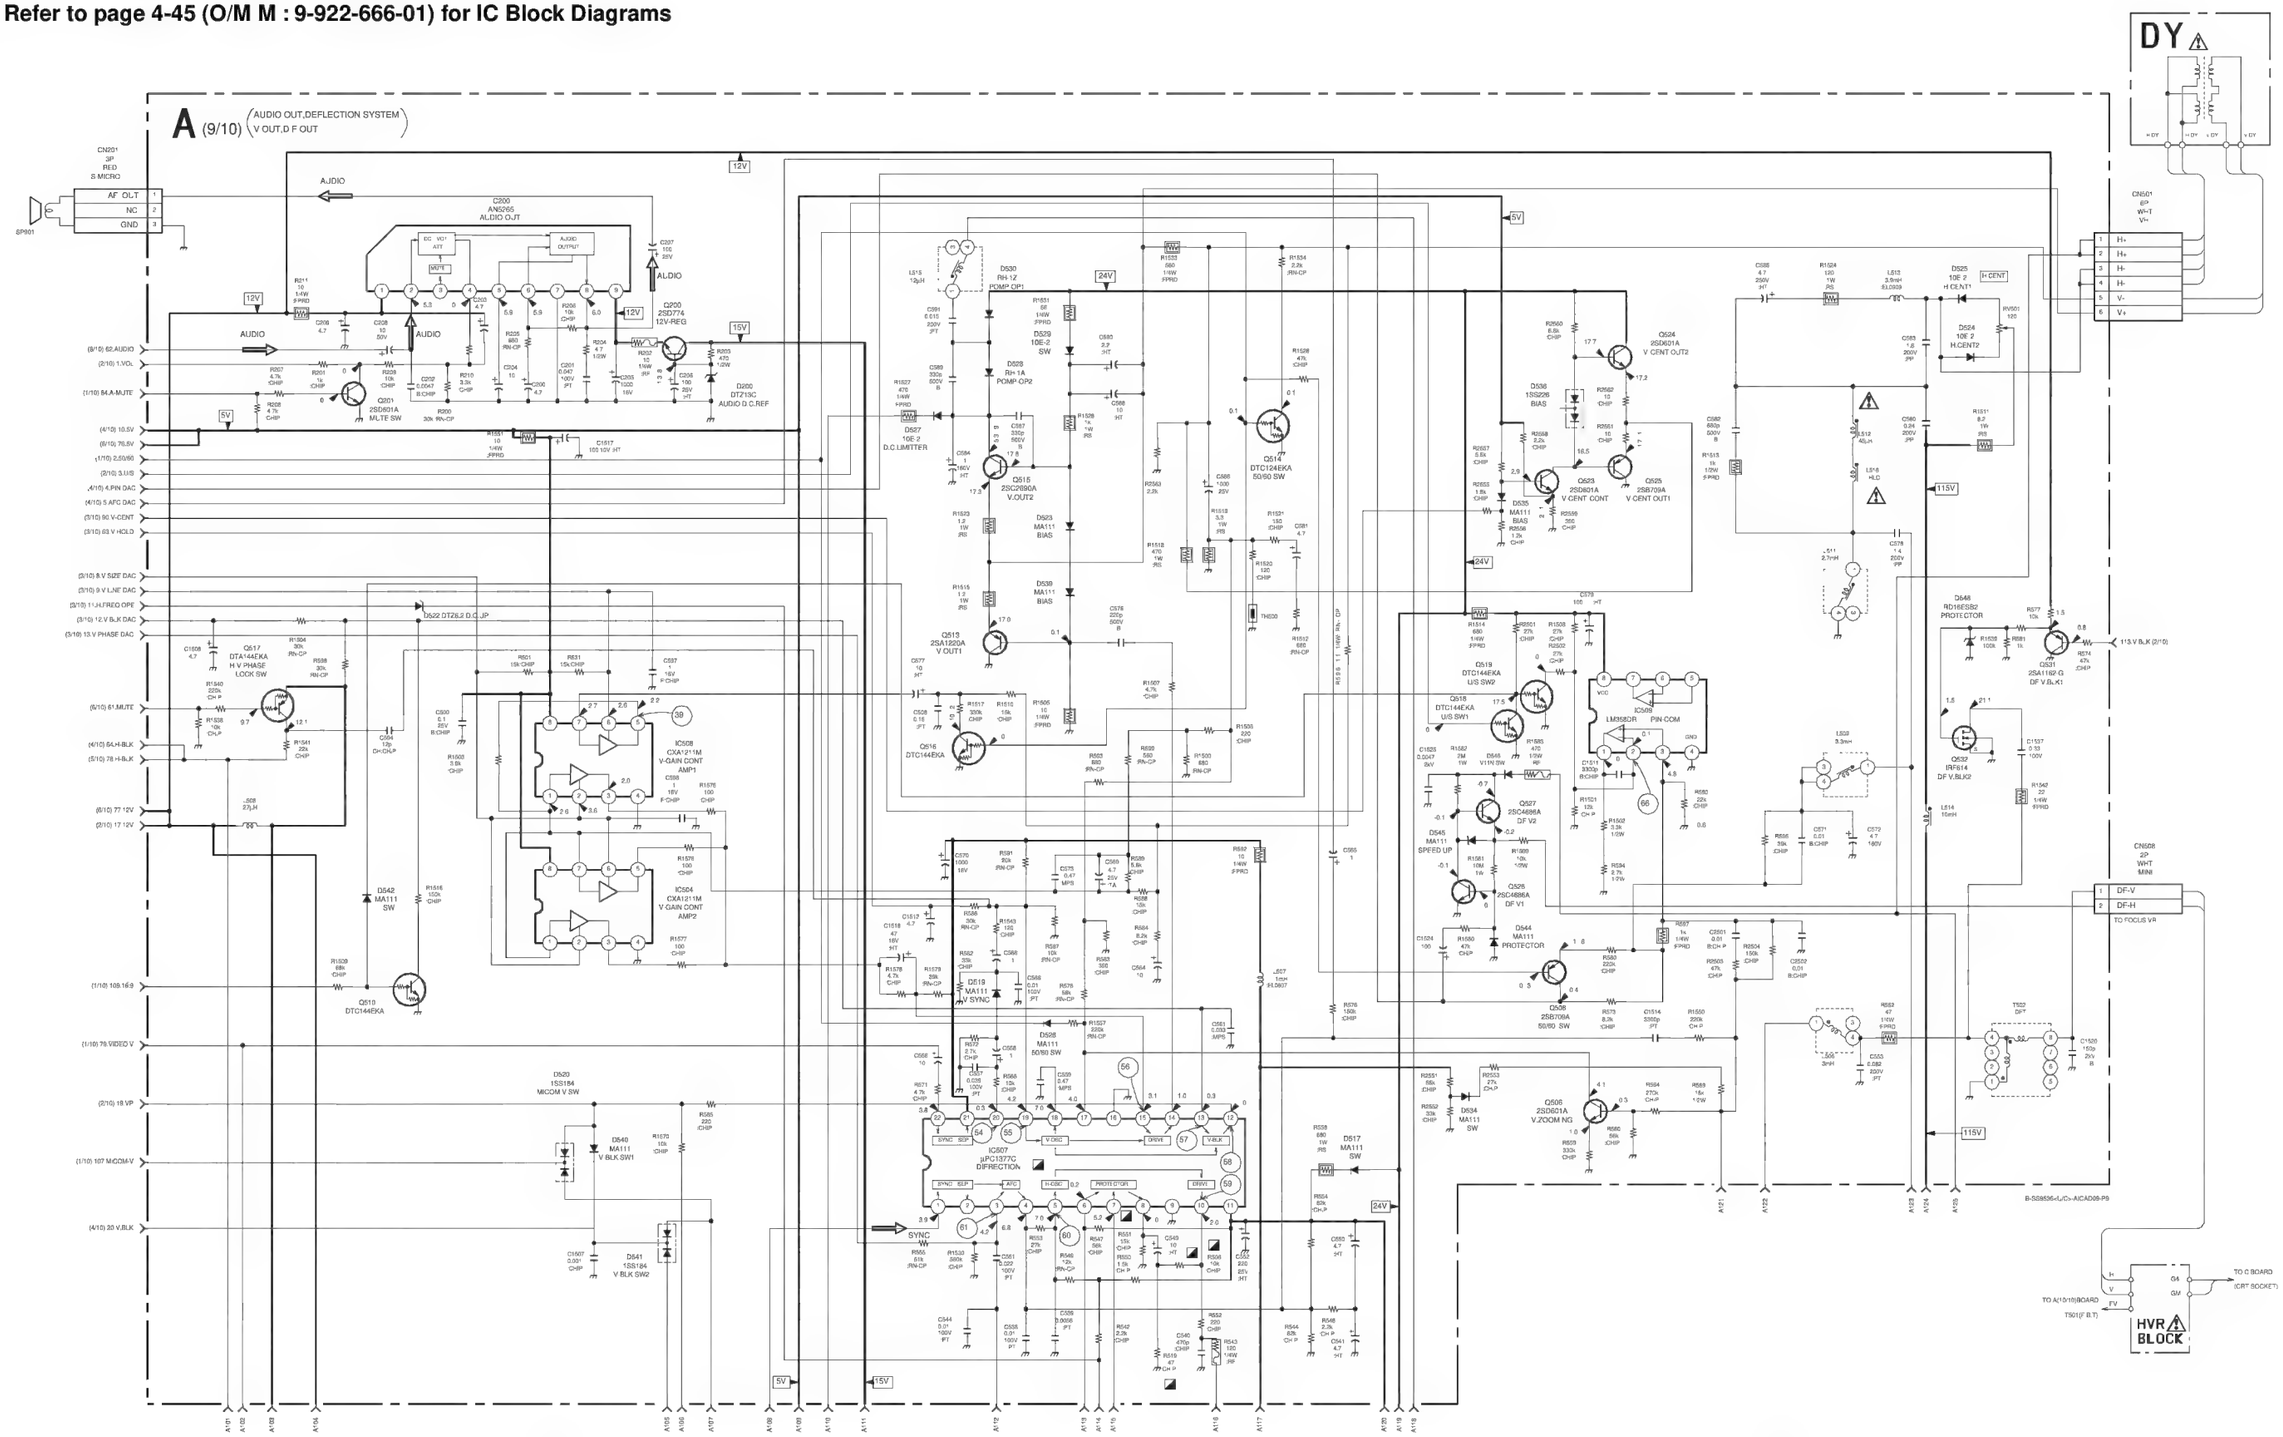

• A BOARD (10/10) (H OUT, MONO MULTI, X-RAY PROTECTOR) DIAGRAM

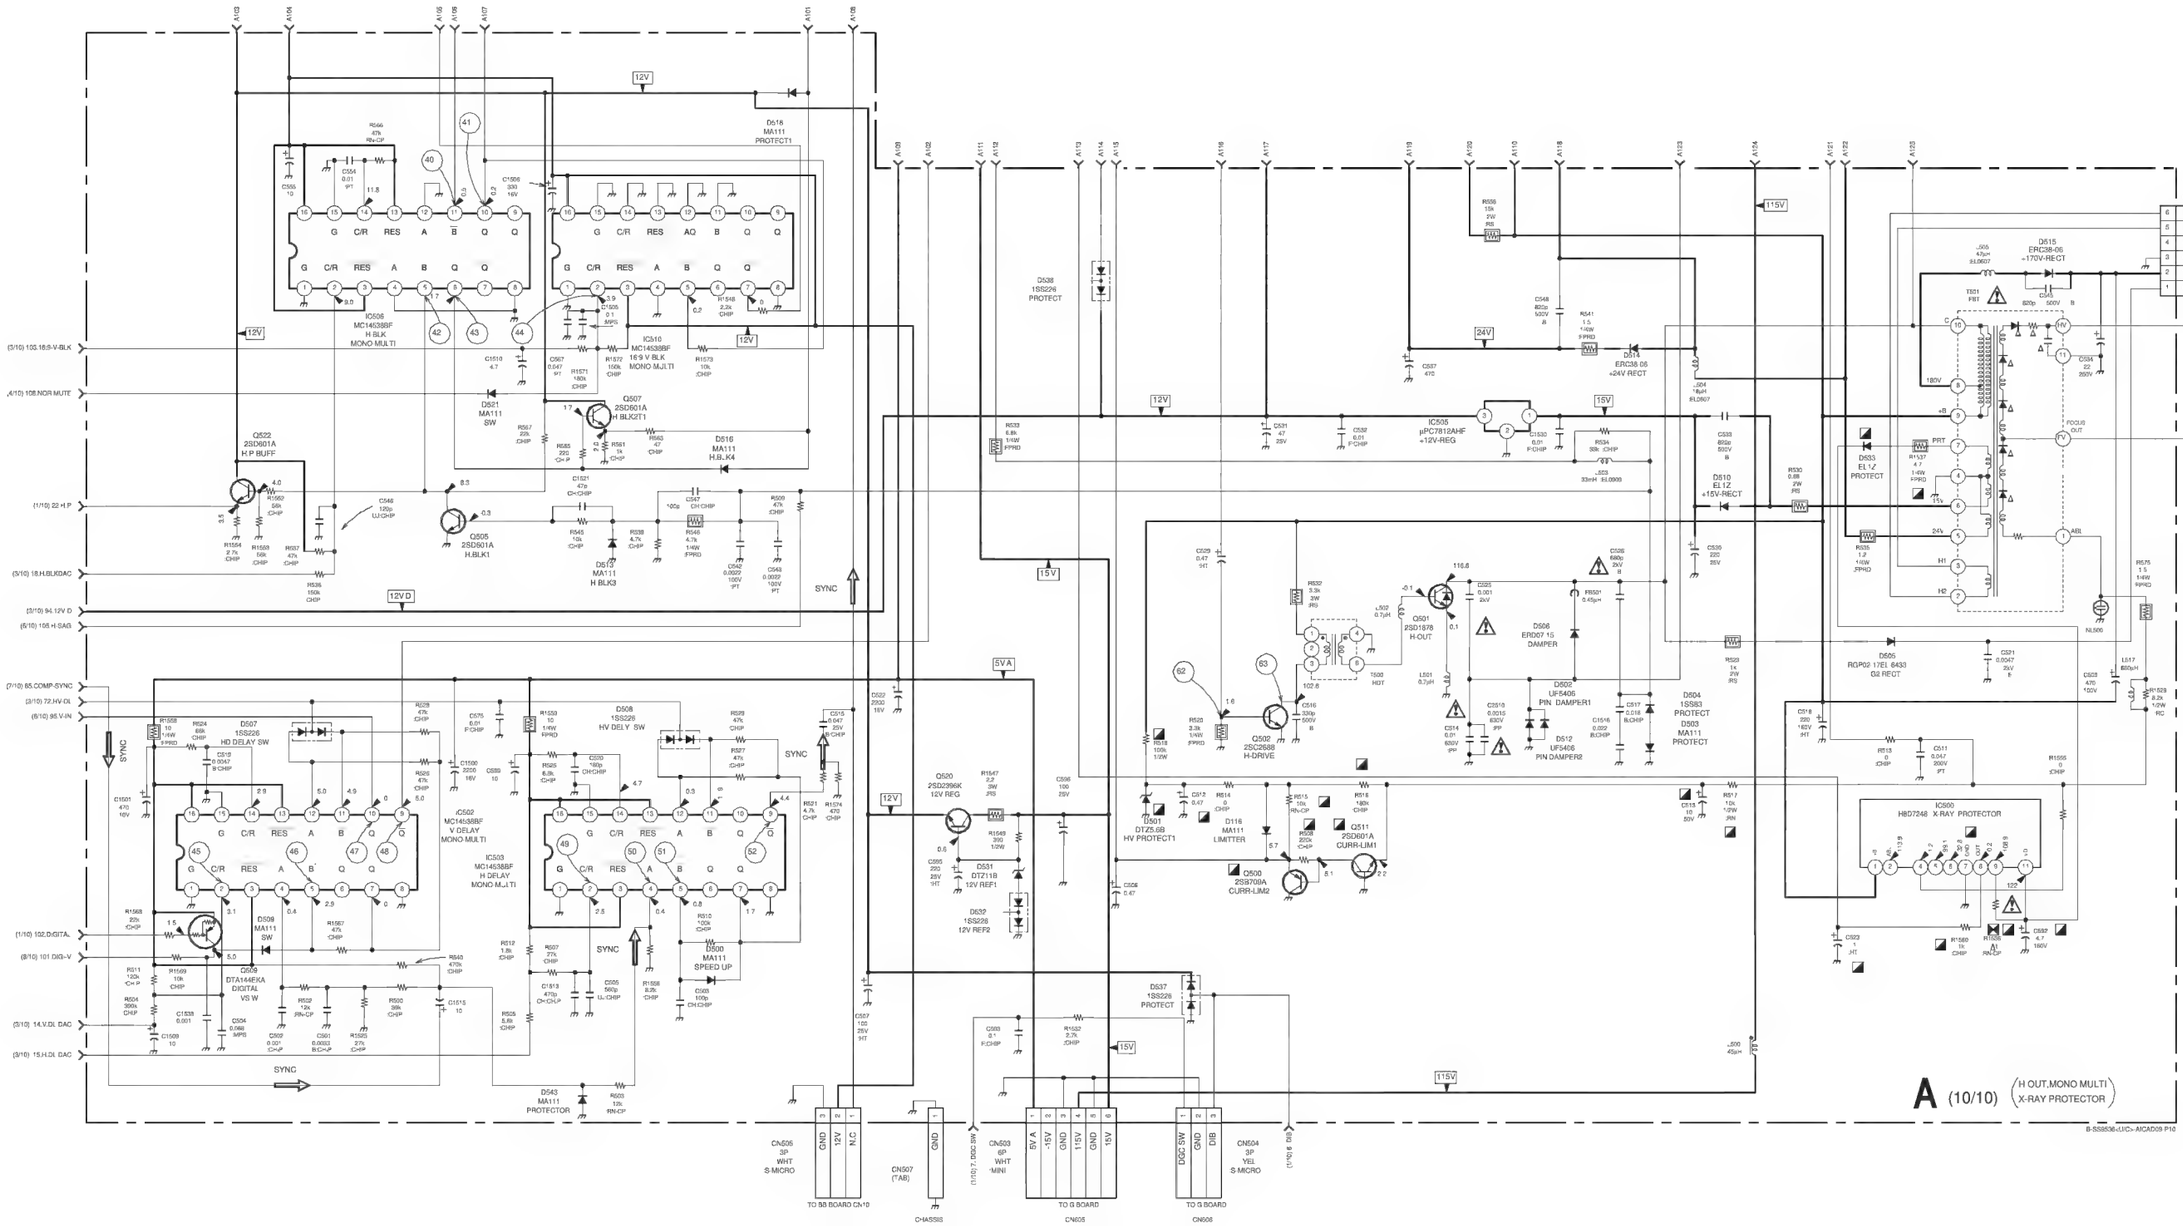

• C BOARD (R.G.B OUT) DIAGRAM

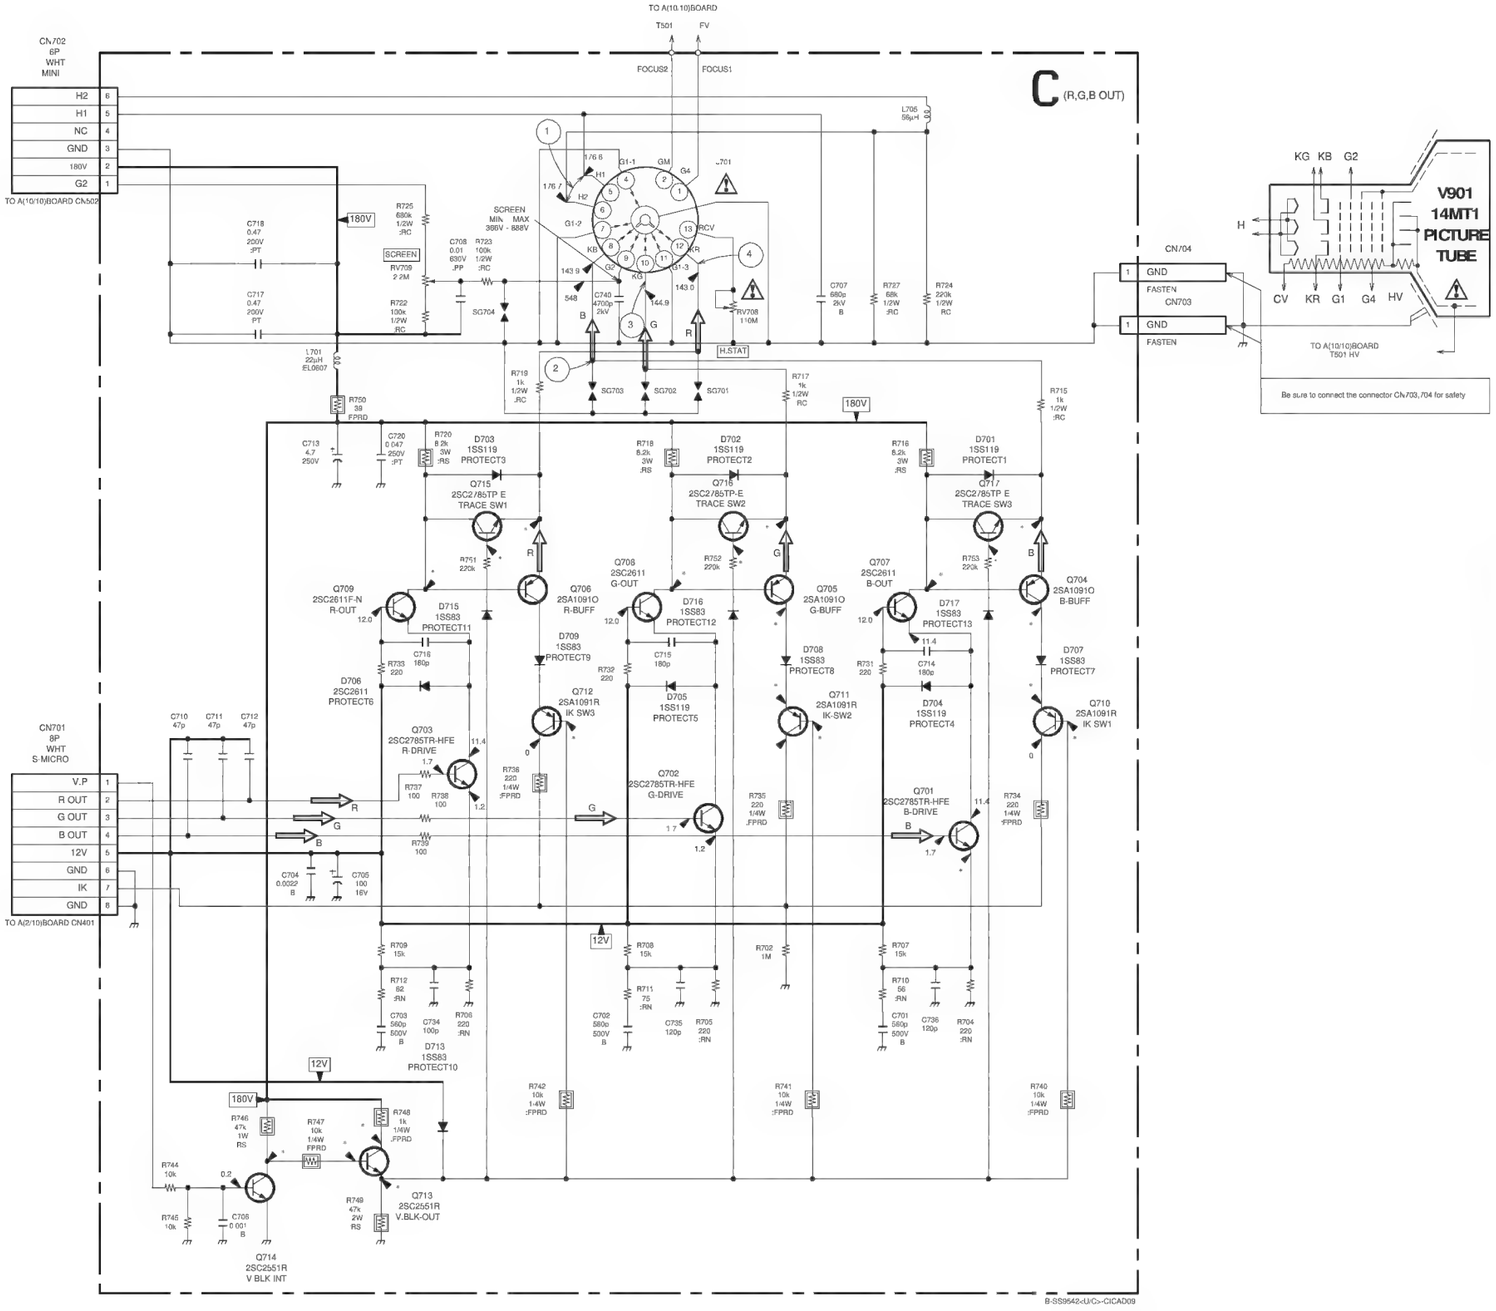

C (R.G.B OUT) BOARD

— C BOARD — <Conductor side>

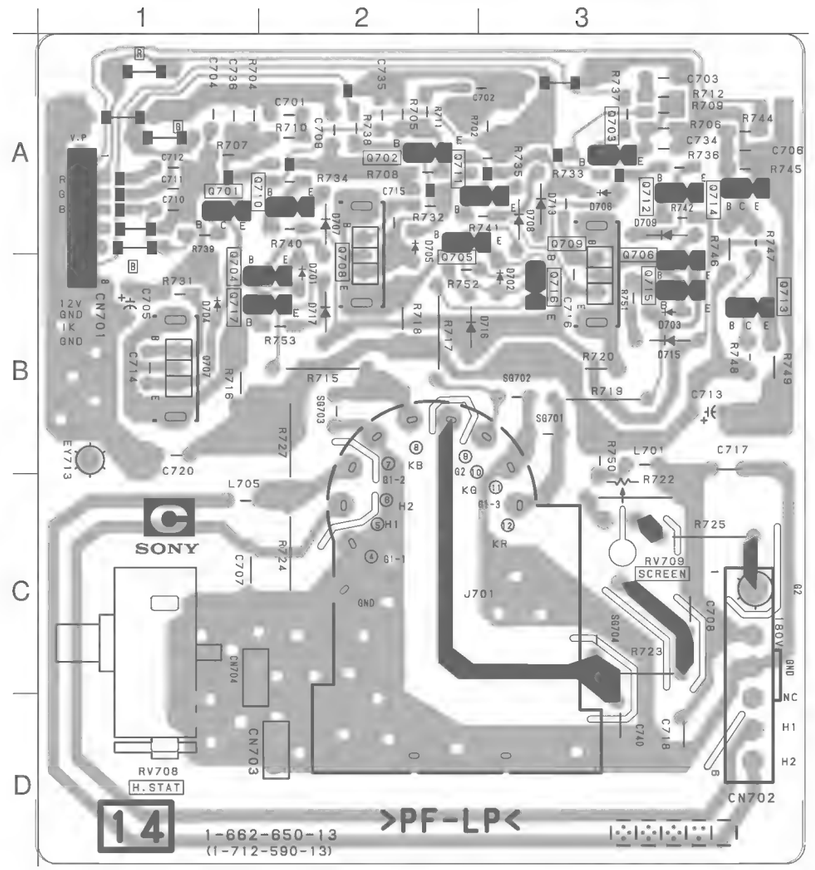

--
C
--
1-662-650-13

D701	B-2	Q707	B-1
D702	B-3	Q708	B-2
D703	B-3	Q709	B-3
D704	B-1	Q710	A-2
D705	A-2	Q711	A-2
D706	A-3	Q712	A-3
D707	A-2	Q713	B-3
D708	A-3	Q714	A-3
D709	A-3	Q715	B-3
D713	A-3	Q716	B-3
D715	B-3	Q717	B-2
D716	B-2		
D717	B-2	RV708	C-1
		RV709	C-3
Q701	A-1		
Q702	A-2		
Q703	A-3		
Q704	B-2		
Q705	A-2		
Q706	B-3		

• H BOARD (CUSTMER CONTROL) DIAGRAM

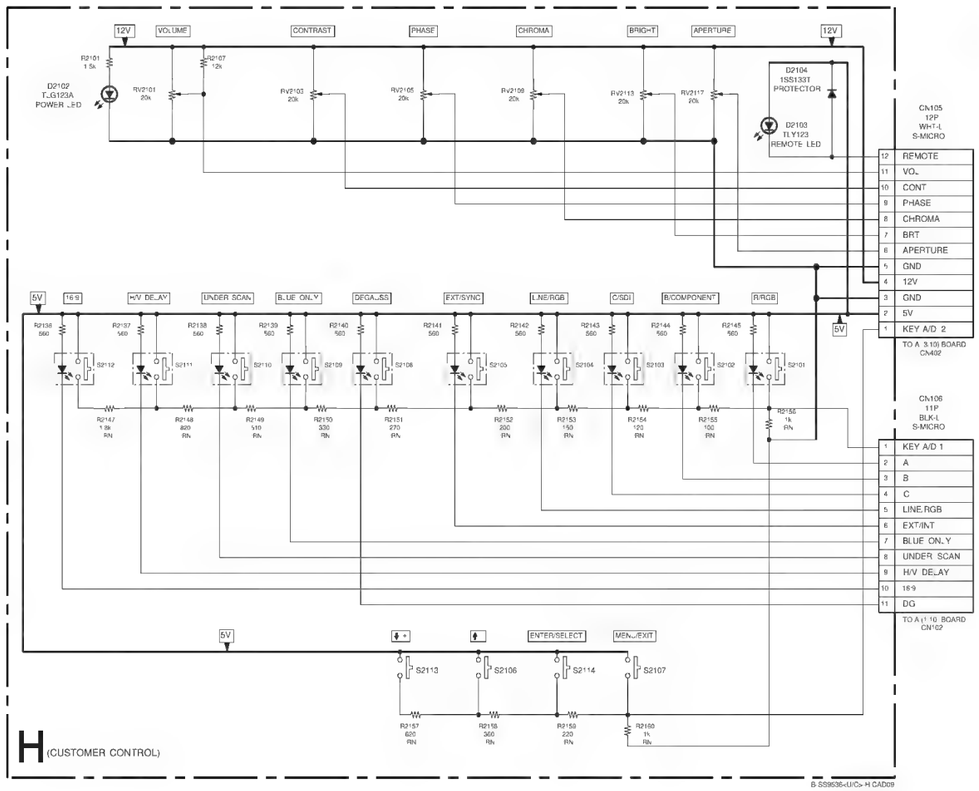

H,G H,G

H (CUSTOMER CONTROL) BOARD — H BOARD — <Conductor side>

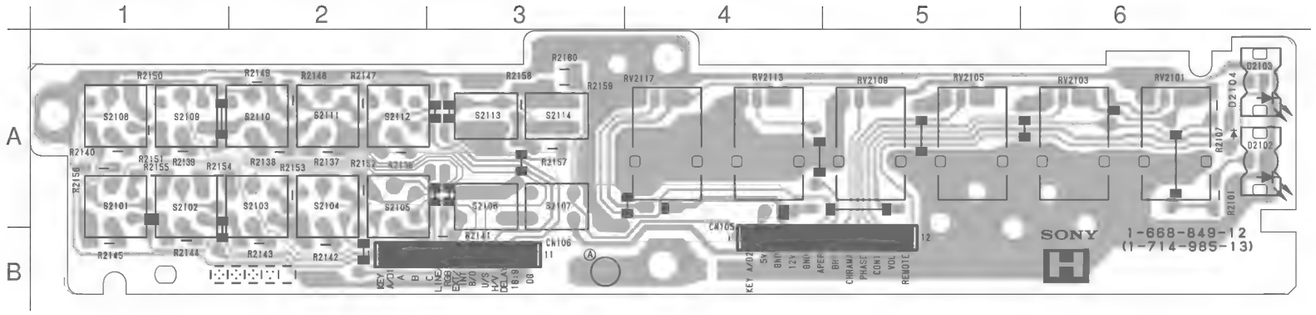

G (AC RECT, POWER SUPPLY) BOARD — G BOARD — <Conductor side>

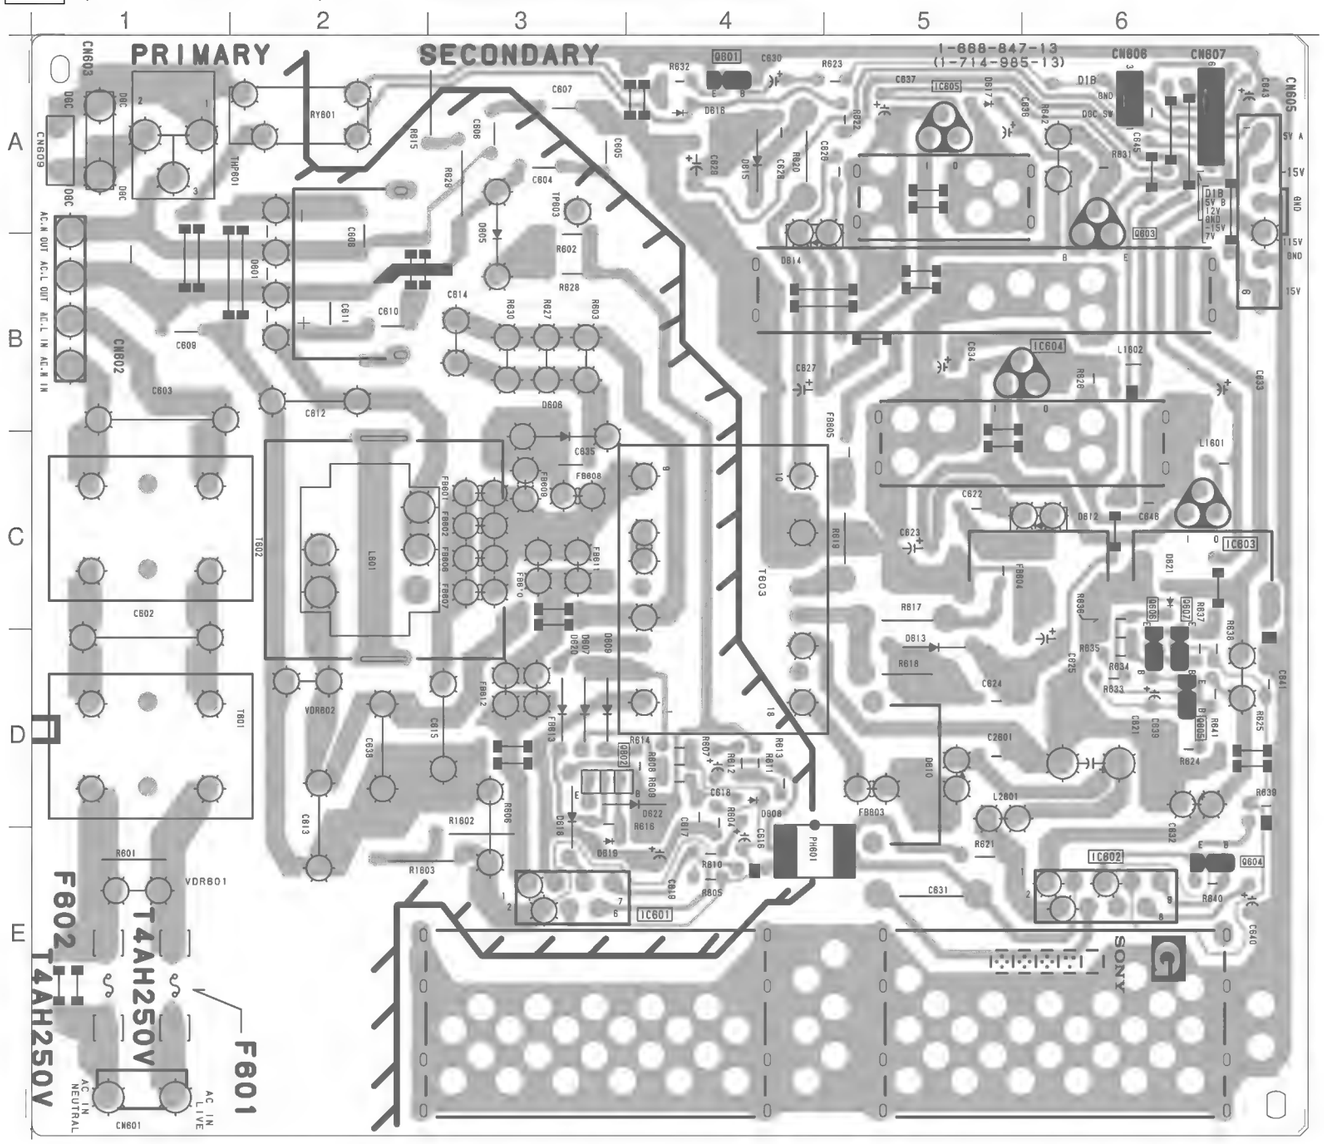

A | B | C | D | E | F | G | H

• G BOARD (AC RECT, POWER SUPPLY) DIAGRAM

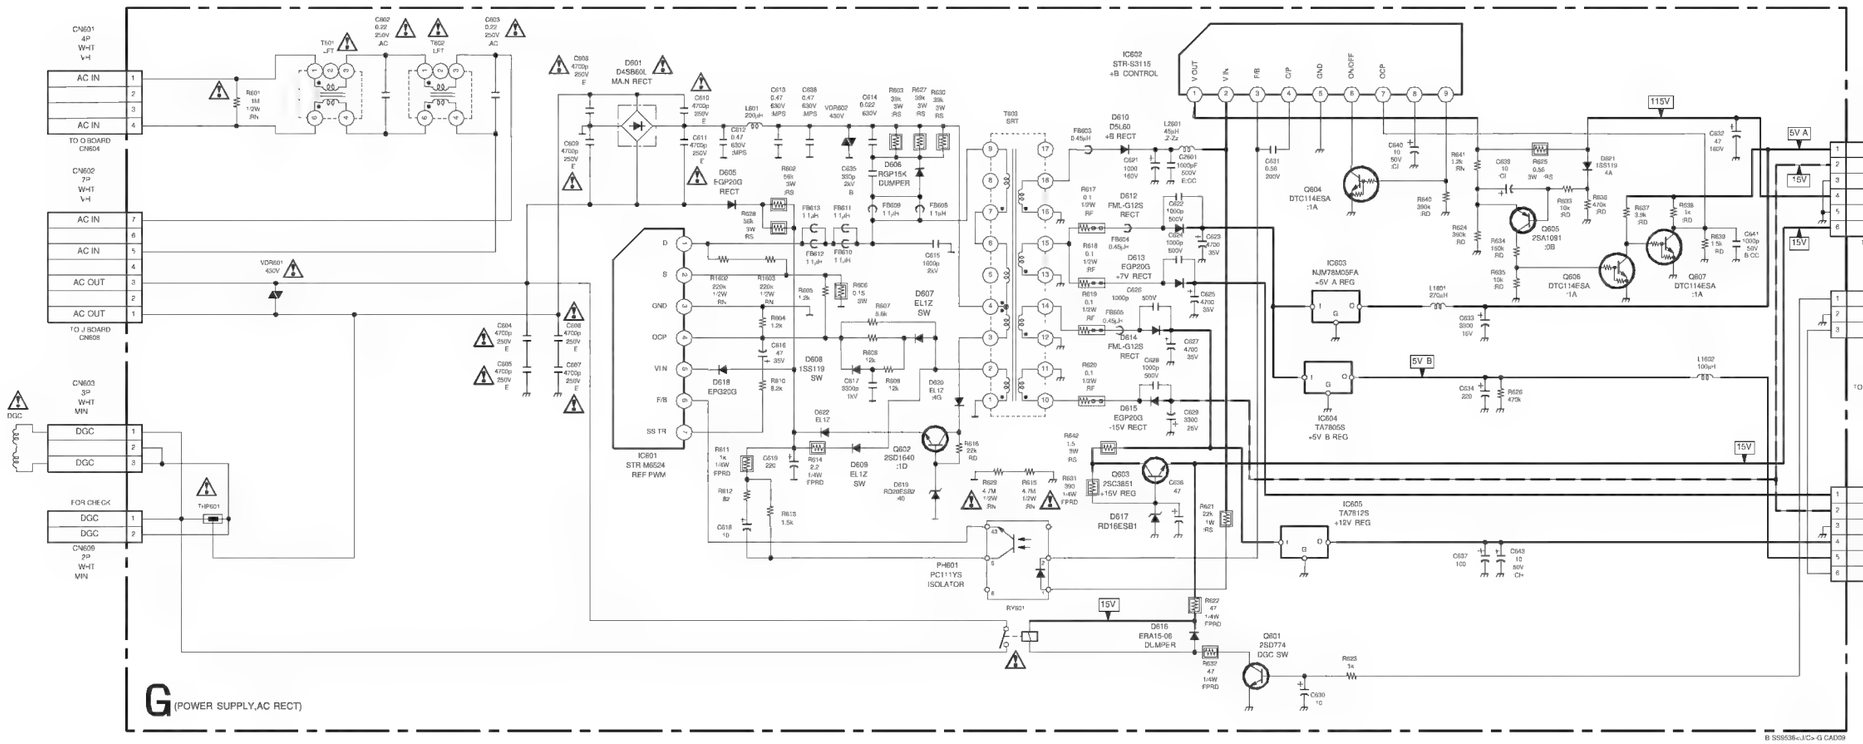

SECTION 6
ELECTRICAL PARTS LIST

A

NOTE :

The components identified by mark ⚠ are critical for safety.
Replace only with the part number specified.

Les composants identifiés par une marque ⚠ sont critiques pour la sécurité.
Ne les remplacer que par une piéce portant le numéro spécifié.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS
- All resistors are in ohms
- F : nonflammable

CAPACITORS
- PF : μμF

When indicating parts by reference number, please include the board name.

- The components identified by mark ⧓ in this manual have been carefully factory selected foreach set in order ot satisfy regulations regurdiding X-rey rediation.

【使用上の注意】

⚠印の部品は，安全性を維持するために，重要な部品です。従って交換時は，必ず指定の部品を使用してください。

図面番号で部品を指定するときは基板名又はブロックを併せて指定して下さい。

- コンデンサの単位で，PFはμμFを示します。
- 抵抗の単位Ωは省略してあります。
  金属被膜：金属被膜抵抗。
  酸金被膜：酸化金属被膜抵抗。
  備考欄のFは不燃性抵抗を示します。

- *印の部品は常備在庫しておりません。
  受注してから供給できるまで，日数を要します。
- ⧓印の部品の定数は，X線量規制の規格を満足させるため，製造時セット毎に確認し決定したものです。
  万一この部品を交換する場合は，セットに付いている部品と同一のものをご使用下さい。
- -XX，-Xは標準部品のため，セットに付いている部品と異なる場合があります。
- ここに記載されている部品は，補修用部品であるため，回路図及びセットについている部品と異なる場合があります。
- 基板どうしでリファレンスNo.が重複している場合がありますので発注の際には必ず基板名を明記して下さい。

A

REF NO.	PART NO.	DESCRIPTION				REMARK
	* A-1298-561-A	A COMPL				
		********				
	4-030-359-81	HEATSINK, H. PIN				
	* 4-043-994-01	PLATE (CF), SHIELD (CP303)				
	4-382-854-11	SCREW(M3X10), P, SW (+)				
	7-685-663-79	SCREW+BVTP 4X16 TYPE2 IT-3 (T501)				
	7-682-948-01	SCREW+PSW 3X8				
		<BANDPASS FILTER >				
BPF400	1-236-363-11	FILTER, BAND PASS				
		<CAPACITOR>				
C105	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C106	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C114	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C115	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C116	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C117	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C118	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C119	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C121	1-163-237-11	CERAMIC CHIP	27PF	5%	50V	
C123	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C124	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C132	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C133	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C134	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C135	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C136	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C140	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C141	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V	
C142	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C143	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C144	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C145	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C154	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V	
C155	1-163-023-00	CERAMIC CHIP	0.015MF	10%	50V	
C156	1-163-019-00	CERAMIC CHIP	0.0068MF	10%	50V	
C157	1-163-019-00	CERAMIC CHIP	0.0068MF	10%	50V	
C158	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V	
C159	1-164-344-11	CERAMIC CHIP	0.068MF	10%	25V	
C161	1-104-664-11	ELECT	47MF	20%	25V	
C162	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C164	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C165	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C166	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C167	1-126-925-11	ELECT	470MF	20%	10V	
C168	1-126-925-11	ELECT	470MF	20%	10V	
C169	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V	
C171	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C174	1-163-243-11	CERAMIC CHIP	47PF	5%	50V	
C200	1-126-963-11	ELECT	4.7MF	20%	50V	
C201	1-137-353-11	MYLAR	0.047MF	10%	100V	
C202	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V	
C203	1-126-963-11	ELECT	4.7MF	20%	50V	
C204	1-126-964-11	ELECT	10MF	20%	50V	
C205	1-126-767-11	ELECT	1000MF	20%	16V	
C206	1-128-526-11	ELECT	100MF	20%	25V	
C207	1-104-665-11	ELECT	100MF	20%	25V	
C208	1-126-964-11	ELECT	10MF	20%	50V	
C209	1-126-963-11	ELECT	4.7MF	20%	50V	
C300	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C301	1-163-086-00	CERAMIC CHIP	3PF	0.25PF	50V	
C302	1-163-086-00	CERAMIC CHIP	3PF	0.25PF	50V	
C304	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C305	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C306	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C309	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C310	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C311	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V	
C312	1-126-961-11	ELECT	2.2MF	20%	50V	
C313	1-163-145-00	CERAMIC CHIP	0.0015MF	5%	50V	
C314	1-163-249-11	CERAMIC CHIP	82PF	5%	50V	
C315	1-126-964-11	ELECT	10MF	20%	50V	
C316	1-104-664-11	ELECT	47MF	20%	25V	
C317	1-163-231-11	CERAMIC CHIP	15PF	5%	50V	
C318	1-126-964-11	ELECT	10MF	20%	50V	
C319	1-163-222-11	CERAMIC CHIP	5PF	0.25PF	50V	
C320	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C322	1-163-119-00	CERAMIC CHIP	120PF	5%	50V	
C323	1-163-231-11	CERAMIC CHIP	15PF	5%	50V	
C324	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C325	1-126-964-11	ELECT	10MF	20%	50V	
C326	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C327	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C328	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C329	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C330	1-163-243-11	CERAMIC CHIP	47PF	5%	50V	
C331	1-163-231-11	CERAMIC CHIP	15PF	5%	50V	
C332	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C333	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C334	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C335	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C336	1-104-664-11	ELECT	47MF	20%	25V	
C337	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C338	1-163-119-00	CERAMIC CHIP	120PF	5%	50V	
C339	1-163-231-11	CERAMIC CHIP	15PF	5%	50V	
C340	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C341	1-163-119-00	CERAMIC CHIP	120PF	5%	50V	
C342	1-163-018-00	CERAMIC CHIP	0.0056MF	10%	50V	
C343	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C344	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C345	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C346	1-126-960-11	ELECT	1MF	20%	50V	
C347	1-163-243-11	CERAMIC CHIP	47PF	5%	50V	
C348	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V	
C349	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C350	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V	
C351	1-104-664-11	ELECT	47MF	20%	25V	
C352	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C353	1-165-319-11	CERAMIC CHIP	0.1MF		50V	
C354	1-163-121-00	CERAMIC CHIP	150PF	5%	50V	
C355	1-126-960-11	ELECT	1MF	20%	50V	
C356	1-126-963-11	ELECT	4.7MF	20%	50V	
C357	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C358	1-163-031-11	CERAMIC CHIP	0.01MF		50V	
C359	1-104-664-11	ELECT	47MF	20%	25V	
C360	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V	

REF NO.	PART NO.	DESCRIPTION			REMARK
C361	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C362	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C363	1-163-233-11	CERAMIC CHIP	18PF	5%	50V
C364	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C365	1-106-343-00	MYLAR	0.001MF	10%	100V
C366	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C367	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C368	1-124-261-00	ELECT	10MF	20%	50V
C369	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C370	1-104-664-11	ELECT	47MF	20%	25V
C371	1-104-664-11	ELECT	47MF	20%	25V
C372	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C373	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C374	1-126-960-11	ELECT	1MF	20%	50V
C375	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C376	1-126-959-11	ELECT	0.47MF	20%	50V
C377	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C378	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C379	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C380	1-126-767-11	ELECT	1000MF	20%	16V
C381	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C382	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C383	1-104-664-11	ELECT	47MF	20%	25V
C384	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C385	1-104-664-11	ELECT	47MF	20%	25V
C386	1-124-261-00	ELECT	10MF	20%	50V
C387	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C388	1-124-261-00	ELECT	10MF	20%	50V
C389	1-104-664-11	ELECT	47MF	20%	25V
C390	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C391	1-104-664-11	ELECT	47MF	20%	25V
C392	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C393	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C394	1-104-664-11	ELECT	47MF	20%	25V
C395	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C396	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C397	1-104-664-11	ELECT	47MF	20%	25V
C398	1-104-664-11	ELECT	47MF	20%	25V
C399	1-104-664-11	ELECT	47MF	20%	25V
C400	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C401	1-164-346-11	CERAMIC CHIP	1MF		16V
C402	1-126-967-11	ELECT	47MF	20%	50V
C403	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C406	1-126-965-11	ELECT	22MF	20%	50V
C407	1-104-664-11	ELECT	47MF	20%	25V
C408	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C409	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C410	1-126-965-11	ELECT	22MF	20%	50V
C411	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C414	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C415	1-126-964-11	ELECT	10MF	20%	50V
C416	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C417	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C418	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C419	1-126-925-11	ELECT	470MF	20%	10V
C420	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C421	1-164-222-11	CERAMIC CHIP	0.22MF		25V
C422	1-126-960-11	ELECT	1MF	20%	50V
C423	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C424	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C426	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C427	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C428	1-104-661-91	ELECT	330MF	20%	16V
C429	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C430	1-104-661-91	ELECT	330MF	20%	16V
C431	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C432	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C433	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C434	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C435	1-163-089-00	CERAMIC CHIP	6PF	0.25PF	50V
C436	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C437	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C438	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C439	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C440	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C441	1-126-962-11	ELECT	3.3MF	20%	50V
C442	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C443	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C444	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C445	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C446	1-163-089-00	CERAMIC CHIP	6PF	0.25PF	50V
C447	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C448	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C449	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C450	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C451	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C452	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C453	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C454	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C455	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C456	1-163-089-00	CERAMIC CHIP	6PF	0.25PF	50V
C457	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C458	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C459	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C460	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C461	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C462	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C463	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C464	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C465	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C466	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C467	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C469	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C470	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C471	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C472	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C473	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C475	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C476	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C477	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C478	1-126-964-11	ELECT	10MF	20%	50V
C479	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C482	1-126-925-11	ELECT	470MF	20%	10V
C483	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C484	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C485	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C486	1-163-249-11	CERAMIC CHIP	82PF	5%	50V

A

REF NO.		PART NO.	DESCRIPTION			REMARK
C487		1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C490		1-164-336-11	CERAMIC CHIP	0.33MF		25V
C491		1-164-336-11	CERAMIC CHIP	0.33MF		25V
C492		1-164-336-11	CERAMIC CHIP	0.33MF		25V
C493		1-104-760-11	CERAMIC CHIP	0.047MF	10%	50V
C494		1-164-005-11	CERAMIC CHIP	0.47MF		25V
C495		1-126-964-11	ELECT	10MF	20%	50V
C496		1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C497		1-163-011-11	CERAMIC CHIP	0.0015MF	10%	50V
C498		1-126-961-11	ELECT	2.2MF	20%	50V
C499		1-163-031-11	CERAMIC CHIP	0.01MF		50V
C500		1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C501		1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C502		1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C503		1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C504		1-136-495-11	FILM	0.068MF	5%	50V
C505		1-163-199-00	CERAMIC CHIP	560PF	5%	50V
C506		1-126-959-11	ELECT	0.47MF	20%	50V
C507		1-128-526-11	ELECT	100MF	20%	25V
C508		1-130-497-00	MYLAR	0.15MF	5%	50V
C509		1-128-566-11	ELECT	470MF	20%	100V
C511		1-107-368-11	FILM	0.047MF	10%	200V
C512		1-126-959-11	ELECT	0.47MF	20%	50V
C513		1-124-261-00	ELECT	10MF	20%	50V
C514	⚠	1-130-338-91	FILM	0.01MF	5%	630V
C515		1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C516		1-102-030-00	CERAMIC	330PF	10%	500V
C517		1-163-024-00	CERAMIC CHIP	0.018MF	10%	50V
C518		1-107-947-11	ELECT	220MF	20%	160V
C519		1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C520		1-163-257-11	CERAMIC CHIP	180PF	5%	50V
C521		1-162-114-00	CERAMIC	0.0047MF	2KV	
C522		1-126-768-11	ELECT	2200MF	20%	16V
C523		1-107-902-11	ELECT	1MF	20%	50V
C525	⚠	1-136-080-11	FILM	0.011MF	3%	2KV
C526	⚠	1-162-116-91	CERAMIC	680PF	10%	2KV
C529		1-107-901-11	ELECT	0.47MF	20%	50V
C530		1-104-666-11	ELECT	220MF	20%	25V
C531		1-104-664-11	ELECT	47MF	20%	25V
C532		1-163-031-11	CERAMIC CHIP	0.01MF		50V
C533		1-102-212-00	CERAMIC	820PF	10%	500V
C534		1-107-662-11	ELECT	22MF	20%	250V
C537		1-126-971-11	ELECT	470MF	20%	50V
C538		1-137-150-11	MYLAR	0.01MF	10%	100V
C539		1-130-480-00	FILM	0.0056MF	5%	50V
C540		1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C541		1-107-905-11	ELECT	4.7MF	20%	50V
C542		1-136-684-51	MYLAR	0.0022MF	10%	100V
C543		1-136-684-51	MYLAR	0.0022MF	10%	100V
C544		1-137-150-11	MYLAR	0.01MF	10%	100V
C545		1-102-212-00	CERAMIC	820PF	10%	500V
C546		1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C547		1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C548		1-102-212-00	CERAMIC	820PF	10%	500V
C549		1-107-906-11	ELECT	10MF	20%	50V
C550		1-107-905-11	ELECT	4.7MF	20%	50V
C551		1-106-375-12	MYLAR	0.022MF	10%	100V
C552		1-107-889-11	ELECT	220MF	20%	25V

REF NO.	PART NO.	DESCRIPTION			REMARK
C553	1-106-389-00	MYLAR	0.082MF	10%	200V
C554	1-130-736-11	FILM	0.01MF	5%	50V
C555	1-126-964-11	ELECT	10MF	20%	50V
C556	1-126-964-11	ELECT	10MF	20%	50V
C557	1-106-381-12	MYLAR	0.039MF	10%	100V
C558	1-126-960-11	ELECT	1MF	20%	50V
C559	1-137-194-81	FILM	0.47MF	5%	50V
C561	1-136-159-00	FILM	0.033MF	5%	50V
C564	1-126-964-11	ELECT	10MF	20%	50V
C565	1-126-960-11	ELECT	1MF	20%	50V
C566	1-137-150-11	MYLAR	0.01MF	10%	100V
C567	1-136-499-11	FILM	0.047MF	5%	50V
C568	1-126-960-11	ELECT	1MF	20%	50V
C569	1-131-351-00	TANTALUM	4.7MF	10%	25V
C570	1-126-767-11	ELECT	1000MF	20%	16V
C571	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C572	1-104-709-11	ELECT	4.7MF	0	160V
C573	1-137-194-81	FILM	0.47MF	5%	50V
C575	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C576	1-102-244-00	CERAMIC	220PF	10%	500V
C577	1-107-906-11	ELECT	10MF	20%	50V
C578	1-136-112-00	FILM	1.4MF	5%	200V
C579	1-107-910-11	ELECT	100MF	20%	50V
C580	1-136-756-11	FILM	0.24MF	5%	200V
C581	1-126-963-11	ELECT	4.7MF	20%	50V
C582	1-102-002-00	CERAMIC	680PF	10%	500V
C583	1-136-828-11	FILM	1.8MF	5%	200V
C584	1-124-940-51	ELECT	1MF	20%	160V
C585	1-107-960-11	ELECT	4.7MF	20%	250V
C586	1-126-942-61	ELECT	1000MF	20%	25V
C587	1-102-030-00	CERAMIC	330PF	10%	500V
C588	1-107-906-11	ELECT	10MF	20%	50V
C589	1-102-030-00	CERAMIC	330PF	10%	500V
C590	1-107-903-11	ELECT	2.2MF	20%	50V
C591	1-107-365-11	FILM	0.015MF	10%	200V
C592	1-107-635-11	ELECT	4.7MF	20%	160V
C593	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C594	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C595	1-107-889-11	ELECT	220MF	20%	25V
C596	1-104-665-11	ELECT	100MF	20%	25V
C597	1-164-346-11	CERAMIC CHIP	1MF		16V
C598	1-164-346-11	CERAMIC CHIP	1MF		16V
C599	1-124-261-00	ELECT	10MF	20%	50V
C1300	1-104-664-11	ELECT	47MF	20%	25V
C1301	1-104-664-11	ELECT	47MF	20%	25V
C1302	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C1304	1-104-664-11	ELECT	47MF	20%	25V
C1305	1-104-664-11	ELECT	47MF	20%	25V
C1306	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1307	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1308	1-104-665-11	ELECT	100MF	20%	10V
C1309	1-163-257-11	CERAMIC CHIP	180PF	5%	50V
C1310	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1311	1-104-664-11	ELECT	47MF	20%	25V
C1312	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1313	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1314	1-104-664-11	ELECT	47MF	20%	25V
C1315	1-104-664-11	ELECT	47MF	20%	25V
C1316	1-163-031-11	CERAMIC CHIP	0.01MF		50V

REF NO.	PART NO.	DESCRIPTION			REMARK
C1317	1-104-664-11	ELECT	47MF	20%	25V
C1318	1-104-664-11	ELECT	47MF	20%	25V
C1319	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C1320	1-104-664-11	ELECT	47MF	20%	25V
C1321	1-104-664-11	ELECT	47MF	20%	25V
C1322	1-126-934-11	ELECT	220MF	20%	16V
C1323	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1324	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1325	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1326	1-104-664-11	ELECT	47MF	20%	25V
C1327	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1328	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1329	1-126-964-11	ELECT	10MF	20%	50V
C1330	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1331	1-104-664-11	ELECT	47MF	20%	25V
C1332	1-104-664-11	ELECT	47MF	20%	25V
C1333	1-104-664-11	ELECT	47MF	20%	25V
C1334	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C1335	1-104-664-11	ELECT	47MF	20%	25V
C1336	1-104-664-11	ELECT	47MF	20%	25V
C1338	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1339	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1340	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1341	1-163-275-11	CERAMIC CHIP	0.001MF	5%	50V
C1342	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C1343	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C1344	1-163-083-00	CERAMIC CHIP	1PF	0.25PF	50V
C1345	1-124-261-00	ELECT	10MF	20%	50V
C1346	1-124-589-11	ELECT	47MF	20%	16V
C1347	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1348	1-163-127-00	CERAMIC CHIP	270PF	5%	50V
C1349	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C1350	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C1351	1-126-160-11	ELECT	1MF	20%	50V
C1352	1-163-023-00	CERAMIC CHIP	0.015MF	10%	50V
C1353	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1354	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C1355	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C1356	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1357	1-104-661-91	ELECT	330MF	20%	16V
C1358	1-124-589-11	ELECT	47MF	20%	16V
C1359	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C1360	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C1362	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C1363	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1364	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C1365	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C1366	1-104-664-11	ELECT	47MF	20%	25V
C1367	1-104-664-11	ELECT	47MF	20%	25V
C1369	1-163-237-11	CERAMIC CHIP	27PF	5%	50V
C1370	1-163-237-11	CERAMIC CHIP	27PF	5%	50V
C1372	1-104-664-11	ELECT	47MF	20%	25V
C1373	1-104-664-11	ELECT	47MF	20%	25V
C1374	1-104-664-11	ELECT	47MF	20%	25V
C1375	1-126-963-11	ELECT	4.7MF	20%	50V
C1378	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C1380	1-163-163-00	CERAMIC CHIP	18PF	5%	50V
C1381	1-163-163-00	CERAMIC CHIP	18PF	5%	50V
C1382	1-104-664-11	ELECT	47MF	20%	25V
C1383	1-104-664-11	ELECT	47MF	20%	25V
C1384	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C1385	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1386	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1387	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1388	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C1393	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C1400	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1401	1-137-194-81	FILM	0.47MF	5%	50V
C1402	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1403	1-137-194-81	FILM	0.47MF	5%	50V
C1404	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C1405	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1406	1-163-090-00	CERAMIC CHIP	7PF	0.25PF	50V
C1407	1-163-085-00	CERAMIC CHIP	2PF	0.25PF	50V
C1408	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C1500	1-126-768-11	ELECT	2200MF	20%	16V
C1501	1-126-925-11	ELECT	470MF	20%	10V
C1505	1-136-165-00	FILM	0.1MF	5%	50V
C1506	1-104-661-91	ELECT	330MF	20%	16V
C1507	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C1508	1-126-963-11	ELECT	4.7MF	20%	50V
C1509	1-126-964-11	ELECT	10MF	20%	50V
C1510	1-126-963-11	ELECT	4.7MF	20%	50V
C1511	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C1512	1-126-963-11	ELECT	4.7MF	20%	50V
C1513	1-163-197-00	CERAMIC CHIP	470PF	5%	50V
C1514	1-130-477-00	MYLAR	0.0033MF	5%	50V
C1515	1-126-964-11	ELECT	10MF	20%	50V
C1516	1-163-063-91	CERAMIC CHIP	0.022MF	10%	50V
C1517	1-128-526-11	ELECT	100MF	20%	10V
C1518	1-107-909-11	ELECT	47MF	20%	16V
C1520	1-162-129-00	CERAMIC	150PF	10%	2KV
C1521	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C1524	1-107-910-11	ELECT	100MF	20%	50V
C1525	1-162-114-00	CERAMIC	0.0047MF	2KV	
C1530	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1537	1-130-783-00	MYLAR	0.33MF	10%	100V
C1538	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C2501	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C2502	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C2510 ⚠	1-130-061-91	FILM	0.0015MF	5%	630V
		<CONNECTOR>			
CN101	1-573-979-21	CONNECTOR, BOARD TO BOARD 11P			
CN102	* 1-764-334-11	PLUG, CONNECTOR 11P			
CN104	* 1-564-506-11	PLUG, CONNECTOR 3P			
CN105	* 1-565-503-11	CONNECTOR, BOARD TO BOARD 12P			
CN201	* 1-564-506-11	PLUG, CONNECTOR 3P			
CN301	1-764-334-11	PLUG, CONNECTOR 11P			
CN302	* 1-564-510-11	PLUG, CONNECTOR 7P			
CN303	* 1-766-745-11	CONNECTOR, BOARD TO BOARD 12P			
CN305	1-779-070-21	PIN, CONNECTOR 12P			
CN401	* 1-564-511-11	PLUG, CONNECTOR 8P			
CN402	* 1-564-515-11	PLUG, CONNECTOR 12P			
CN501	* 1-580-798-11	CONNECTOR PIN (DY) 6P			
CN502	* 1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P			
CN503	* 1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P			

A

REF NO.	PART NO.	DESCRIPTION	REMARK
CN504	* 1-564-506-11	PLUG, CONNECTOR 3P	
CN505	* 1-564-506-11	PLUG, CONNECTOR 3P	
CN507	1-695-915-11	TAB (CONTACT)	
CN508	1-766-240-11	PIN, CONNECTOR (PC BOARD) 2P	
		<COMPOSITION CIRCUIT BLOCK >	
CP300	1-236-366-11	MODULE, TRAP	
CP301	1-236-365-11	MODULE, TRAP	
CP302	1-808-654-21	MODULE	
CP303	1-466-162-61	FILTER BLOCK, COM (CFB-4)	
		<DIODE>	
D100	8-719-073-01	DIODE MA111-(K8).S0	
D101	8-719-800-76	DIODE 1SS226	
D102	8-719-800-76	DIODE 1SS226	
D103	8-719-045-70	DIODE 1SV230TPH3	
D104	8-719-800-76	DIODE 1SS226	
D105	8-719-800-76	DIODE 1SS226	
D107	8-719-800-76	DIODE 1SS226	
D108	8-719-104-34	DIODE 1S2836	
D109	8-719-801-78	DIODE 1SS184	
D111	8-719-977-05	DIODE DTZ6.2	
D114	8-719-073-01	DIODE MA111-(K8).S0	
D115	8-719-977-05	DIODE DTZ6.2	
D116	8-719-073-01	DIODE MA111-(K8).S0	
D200	8-719-977-46	DIODE DTZ13C	
D300	8-719-025-07	DIODE 1SV232-TPH3	
D301	8-719-073-01	DIODE MA111-(K8).S0	
D303	8-719-977-05	DIODE DTZ6.2	
D304	8-719-801-78	DIODE 1SS184	
D305	8-719-800-76	DIODE 1SS226	
D307	8-719-073-01	DIODE MA111-(K8).S0	
D308	8-719-073-01	DIODE MA111-(K8).S0	
D309	8-719-073-01	DIODE MA111-(K8).S0	
D310	8-719-104-34	DIODE 1S2836	
D311	8-719-045-70	DIODE 1SV230TPH3	
D313	8-719-801-78	DIODE 1SS184	
D314	8-719-073-01	DIODE MA111-(K8).S0	
D315	8-719-073-01	DIODE MA111-(K8).S0	
D317	8-719-073-01	DIODE MA111-(K8).S0	
D320	8-719-073-01	DIODE MA111-(K8).S0	
D322	8-719-073-01	DIODE MA111-(K8).S0	
D323	8-719-073-01	DIODE MA111-(K8).S0	
D324	8-719-045-70	DIODE 1SV230TPH3	
D325	8-719-801-78	DIODE 1SS184	
D326	8-719-045-70	DIODE 1SV230TPH3	
D327	8-719-104-34	DIODE 1S2836	
D332	8-719-073-01	DIODE MA111-(K8).S0	
D333	8-719-073-01	DIODE MA111-(K8).S0	
D335	8-719-073-01	DIODE MA111-(K8).S0	
D336	8-719-073-01	DIODE MA111-(K8).S0	
D337	8-719-073-01	DIODE MA111-(K8).S0	
D338	8-719-073-01	DIODE MA111-(K8).S0	
D339	8-719-073-01	DIODE MA111-(K8).S0	
D344	8-719-801-78	DIODE 1SS184	
D345	8-719-104-34	DIODE 1S2836	
D346	8-719-104-34	DIODE 1S2836	
D347	8-719-104-34	DIODE 1S2836	
D360	1-216-295-91	SHORT	0
D361	1-216-295-91	SHORT	0
D362	8-719-158-40	DIODE RD10SB1	
D363	8-719-158-40	DIODE RD10SB1	
D364	8-719-104-34	DIODE 1S2836	
D365	8-719-073-01	DIODE MA111-(K8).S0	
D381	8-719-073-01	DIODE MA111-(K8).S0	
D401	8-719-073-01	DIODE MA111-(K8).S0	
D404	8-719-800-76	DIODE 1SS226	
D405	8-719-801-78	DIODE 1SS184	
D406	8-719-073-01	DIODE MA111-(K8).S0	
D407	8-719-073-01	DIODE MA111-(K8).S0	
D408	8-719-073-01	DIODE MA111-(K8).S0	
D410	8-719-073-01	DIODE MA111-(K8).S0	
D411	8-719-073-01	DIODE MA111-(K8).S0	
D414	8-719-801-78	DIODE 1SS184	
D415	8-719-801-78	DIODE 1SS184	
D416	8-719-801-78	DIODE 1SS184	
D417	8-719-801-78	DIODE 1SS184	
D418	8-719-801-78	DIODE 1SS184	
D421	8-719-073-01	DIODE MA111-(K8).S0	
D422	8-719-073-01	DIODE MA111-(K8).S0	
D423	8-719-800-76	DIODE 1SS226	
D424	8-719-073-01	DIODE MA111-(K8).S0	
D425	8-719-800-76	DIODE 1SS226	
D427	8-719-073-01	DIODE MA111-(K8).S0	
D500	8-719-073-01	DIODE MA111-(K8).S0	
D501	8-719-977-03	DIODE DTZ5.6B	
D502	8-719-979-80	DIODE UF5406	
D503	8-719-073-01	DIODE MA111-(K8).S0	
D504	8-719-901-83	DIODE 1SS83	
D505	8-719-028-72	DIODE RGP02-17EL-6433	
D506	8-719-033-83	DIODE ERD07-15	
D507	8-719-800-76	DIODE 1SS226	
D508	8-719-800-76	DIODE 1SS226	
D509	8-719-073-01	DIODE MA111-(K8).S0	
D510	8-719-302-43	DIODE EL1Z	
D512	8-719-979-80	DIODE UF5406	
D513	8-719-073-01	DIODE MA111-(K8).S0	
D514	8-719-971-20	DIODE ERC38-06	
D515	8-719-971-20	DIODE ERC38-06	
D516	8-719-073-01	DIODE MA111-(K8).S0	
D517	8-719-073-01	DIODE MA111-(K8).S0	
D518	8-719-073-01	DIODE MA111-(K8).S0	
D519	8-719-073-01	DIODE MA111-(K8).S0	
D520	8-719-801-78	DIODE 1SS184	
D521	8-719-073-01	DIODE MA111-(K8).S0	
D522	8-719-977-05	DIODE DTZ6.2	
D523	8-719-073-01	DIODE MA111-(K8).S0	
D524	8-719-200-02	DIODE 10E-2	
D525	8-719-200-02	DIODE 10E-2	
D526	8-719-073-01	DIODE MA111-(K8).S0	
D527	8-719-200-02	DIODE 10E-2	
D528	8-719-300-76	DIODE RH-1A	
D529	8-719-200-02	DIODE 10E-2	
D530	8-719-300-76	DIODE RH-1A	
D531	8-719-977-32	DIODE DTZ11B	
D532	8-719-800-76	DIODE 1SS226	
D533	8-719-302-43	DIODE EL1Z	

REF NO.	PART NO.	DESCRIPTION	REMARK
D534	8-719-073-01	DIODE MA111-(K8).S0	
D535	8-719-073-01	DIODE MA111-(K8).S0	
D536	8-719-800-76	DIODE 1SS226	
D537	8-719-800-76	DIODE 1SS226	
D538	8-719-800-76	DIODE 1SS226	
D539	8-719-073-01	DIODE MA111-(K8).S0	
D540	8-719-073-01	DIODE MA111-(K8).S0	
D541	8-719-801-78	DIODE 1SS184	
D542	8-719-073-01	DIODE MA111-(K8).S0	
D543	8-719-073-01	DIODE MA111-(K8).S0	
D544	8-719-073-01	DIODE MA111-(K8).S0	
D545	8-719-073-01	DIODE MA111-(K8).S0	
D546	8-719-901-19	DIODE V11N	
D548	8-719-110-46	DIODE RD16ESB3	
		<DELAY LINE>	
DL300	1-415-633-11	DELAY LINE, Y	
DL301	1-415-632-11	DELAY LINE, Y	
DL401	1-409-547-11	DELAY LINE	
		<FERRITE BEAD>	
FB501	1-410-396-41	FERRITE 0.45µH	
		<FILTER>	
FL300	1-236-547-11	TRAP, LC	
FL401	1-236-364-11	FILTER, BAND PASS	
		<IC>	
IC101	8-759-536-94	IC µPD78014FYCW-W26	
IC102	8-759-527-74	IC M24C02-MN6T	
IC103	8-759-008-48	IC MC74HC86F	
IC104	8-759-262-59	IC µPD6451AGT-632-E2	
IC105	8-759-196-70	IC M62358FP-E1	
IC106	8-759-196-70	IC M62358FP-E1	
IC107	8-759-196-70	IC M62358FP-E1	
IC108	8-759-042-02	IC S-80743AL-A7-S	
IC109	8-759-196-70	IC M62358FP-E1	
IC110	8-759-196-70	IC M62358FP-E1	
IC111	8-759-009-22	IC MC14094BF	
IC112	8-759-527-73	IC M24C01-MN6T	
IC200	8-759-420-04	IC AN5265	
IC301	8-752-053-21	IC CXA1211M	
IC302	8-759-998-98	IC LM358D	
IC303	8-752-056-67	IC CXA1214P	
IC304	8-759-932-67	IC BU4053BCF	
IC305	8-759-631-08	IC M51279FP	
IC306	8-759-358-46	IC MM1114XFBE	
IC309	8-759-358-46	IC MM1114XFBE	
IC310	8-759-932-67	IC BU4053BCF	
IC311	8-759-008-67	IC MC14066BF	
IC312	8-759-358-46	IC MM1114XFBE	
IC313	8-759-446-66	IC MM1113XFBE	
IC314	8-759-446-66	IC MM1113XFBE	
IC315	8-759-932-67	IC BU4053BCF	
IC316	8-759-432-78	IC MM1111XFBE	
IC317	8-759-009-51	IC MC14538BF	
IC318	8-759-009-67	IC MC14584BF	
IC320	8-759-358-46	IC MM1114XFBE	
IC321	8-759-446-66	IC MM1113XFBE	
IC322	8-759-446-66	IC MM1113XFBE	
IC323	8-759-446-66	IC MM1113XFBE	
IC324	8-759-446-66	IC MM1113XFBE	
IC325	8-759-446-66	IC MM1113XFBE	
IC326	8-759-060-00	IC BA10324AF	
IC327	8-759-008-67	IC MC14066BF	
IC350	8-759-909-71	IC BA4558F	
IC401	8-759-196-69	IC BA7655AF-E2	
IC402	8-752-053-21	IC CXA1211M	
IC403	8-759-008-67	IC MC14066BF	
IC404	8-752-067-05	IC CXA1739S	
IC405	8-759-932-67	IC BU4053BCF	
IC406	8-759-998-98	IC LM358D	
IC407	8-759-008-67	IC MC14066BF	
IC408	8-759-510-73	IC BA10393F-E2	
IC409	8-759-060-00	IC BA10324AF	
IC410	8-759-009-06	IC MC14052BF	
IC411	8-759-008-92	IC MC14024BF	
IC412	8-759-932-67	IC BU4053BCF	
IC413	8-759-932-67	IC BU4053BCF	
IC500	8-749-010-07	IC H8D7248	
IC502	8-759-009-51	IC MC14538BF	
IC503	8-759-009-51	IC MC14538BF	
IC504	8-752-053-21	IC CXA1211M	
IC505	8-759-088-08	IC µPC7812AHF	
IC506	8-759-009-51	IC MC14538BF	
IC507	8-759-100-60	IC µPC1377C	
IC508	8-752-053-21	IC CXA1211M	
IC509	8-759-998-98	IC LM358D	
IC510	8-759-009-51	IC MC14538BF	
		<JUMPER RESISTOR>	
JR302	1-216-295-91	SHORT 0	
JR307	1-216-295-91	SHORT 0	
JR310	1-216-295-91	SHORT 0	
		<COIL>	
L101	1-408-609-41	INDUCTOR 33µH	
L102	1-408-611-31	INDUCTOR 47µH	
L105	1-410-482-31	INDUCTOR 100µH	
L300	1-410-478-11	INDUCTOR 47µH	
L301	1-408-605-31	INDUCTOR 15µH	
L302	1-412-008-31	INDUCTOR CHIP 15µH	
L303	1-408-610-31	INDUCTOR 39µH	
L304	1-412-008-31	INDUCTOR CHIP 15µH	
L305	1-410-196-11	INDUCTOR CHIP 2.2µH	
L306	1-408-610-31	INDUCTOR 39µH	
L307	1-408-605-31	INDUCTOR 15µH	
L308	1-410-466-41	INDUCTOR 4.7µH	
L309	1-410-470-11	INDUCTOR 10µH	
L311	1-410-470-11	INDUCTOR 10µH	
L312	1-412-011-31	INDUCTOR CHIP 27µH	
L314	1-412-011-31	INDUCTOR CHIP 27µH	
L316	1-412-011-31	INDUCTOR CHIP 27µH	
L317	1-410-090-41	INDUCTOR 18MMH	
L319	1-408-615-31	INDUCTOR 100µH	
L320	1-410-682-31	INDUCTOR 470µH	

A

REF NO.		PART NO.	DESCRIPTION		REMARK
L401		1-410-478-11	INDUCTOR	47µH	
L402		1-410-216-31	INDUCTOR CHIP	100µH	
L403		1-410-216-31	INDUCTOR CHIP	100µH	
L404		1-410-216-31	INDUCTOR CHIP	100µH	
L405		1-408-613-31	INDUCTOR	68µH	
L406		1-408-613-31	INDUCTOR	68µH	
L407		1-408-607-31	INDUCTOR	22µH	
L408		1-408-607-31	INDUCTOR	22µH	
L409		1-410-214-31	INDUCTOR CHIP	68µH	
L500		1-459-155-00	COIL (WITH CORE)	45µH	
L501		1-407-365-00	COIL,CHOKE	0.7µH	
L502		1-407-365-00	COIL,CHOKE	0.7µH	
L503		1-410-093-11	INDUCTOR	33MMH	
L504		1-410-666-31	INDUCTOR	18µH	
L505		1-410-671-31	INDUCTOR	47µH	
L506		1-416-239-11	INDUCTOR	3MMH	
L507		1-410-686-11	INDUCTOR	1MMH	
L508		1-412-530-31	INDUCTOR	27µH	
L509		1-459-075-11	COIL,DYNAMIC CONVERSION CHOKE		3.3MMH
L511		1-459-105-21	INDUCTOR	2.7MMH	
L512	⚠	1-459-155-11	COIL (WITH CORE)	45µH	
L513		1-412-447-11	INDUCTOR	3.9MMH	
L514		1-459-104-00	COIL, DUST CORE	10MMH	
L515		1-459-059-00	COIL,DUST CORE		
L516	⚠	1-416-162-11	COIL, HORIZONTAL LINEARITY		
L517		1-412-547-21	INDUCTOR	680µH	
			<NEON LAMP>		
NL500		1-519-526-11	LAMP, NEON		
			<TRANSISTOR>		
Q101		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q102		8-729-216-22	TRANSISTOR	2SA1162-G	
Q103		8-729-216-22	TRANSISTOR	2SA1162-G	
Q104		8-729-907-26	TRANSISTOR	IMX1	
Q105		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q107		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q108		8-729-422-29	TRANSISTOR	2SD601A-S	
Q109		8-729-422-29	TRANSISTOR	2SD601A-S	
Q110		8-729-422-29	TRANSISTOR	2SD601A-S	
Q111		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q112		8-729-422-29	TRANSISTOR	2SD601A-S	
Q113		8-729-422-29	TRANSISTOR	2SD601A-S	
Q114		8-729-422-29	TRANSISTOR	2SD601A-S	
Q200		8-729-140-96	TRANSISTOR	2SD774-34	
Q201		8-729-422-29	TRANSISTOR	2SD601A-S	
Q300		8-729-422-29	TRANSISTOR	2SD601A-S	
Q301		8-729-422-29	TRANSISTOR	2SD601A-S	
Q302		8-729-216-22	TRANSISTOR	2SA1162-G	
Q303		8-729-422-29	TRANSISTOR	2SD601A-S	
Q305		8-729-422-29	TRANSISTOR	2SD601A-S	
Q306		8-729-422-29	TRANSISTOR	2SD601A-S	
Q307		8-729-422-29	TRANSISTOR	2SD601A-S	
Q308		8-729-422-29	TRANSISTOR	2SD601A-S	
Q309		8-729-422-37	TRANSISTOR	2SB709A-R	
Q310		8-729-422-37	TRANSISTOR	2SB709A-R	
Q311		8-729-422-37	TRANSISTOR	2SB709A-R	
Q312		8-729-422-29	TRANSISTOR	2SD601A-S	
Q313		8-729-422-37	TRANSISTOR	2SB709A-R	
Q314		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q315		8-729-422-37	TRANSISTOR	2SB709A-R	
Q316		8-729-422-29	TRANSISTOR	2SD601A-S	
Q318		8-729-422-37	TRANSISTOR	2SB709A-R	
Q319		8-729-422-29	TRANSISTOR	2SD601A-S	
Q320		8-729-422-29	TRANSISTOR	2SD601A-S	
Q321		8-729-422-29	TRANSISTOR	2SD601A-S	
Q322		8-729-422-29	TRANSISTOR	2SD601A-S	
Q323		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q324		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q325		8-729-422-29	TRANSISTOR	2SD601A-S	
Q326		8-729-422-29	TRANSISTOR	2SD601A-S	
Q327		8-729-422-37	TRANSISTOR	2SB709A-R	
Q328		8-729-141-53	TRANSISTOR	2SK94-X2X3X4	
Q329		8-729-141-53	TRANSISTOR	2SK94-X2X3X4	
Q330		8-729-422-37	TRANSISTOR	2SB709A-R	
Q331		8-729-422-37	TRANSISTOR	2SB709A-R	
Q332		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q333		8-729-422-29	TRANSISTOR	2SD601A-S	
Q334		8-729-422-37	TRANSISTOR	2SB709A-R	
Q335		8-729-422-29	TRANSISTOR	2SD601A-S	
Q336		8-729-109-44	TRANSISTOR	2SK94-X4	
Q337		8-729-422-29	TRANSISTOR	2SD601A-S	
Q338		8-729-120-28	TRANSISTOR	2SC1623-L5L6	
Q339		8-729-422-37	TRANSISTOR	2SB709A-R	
Q341		8-729-920-39	TRANSISTOR	IMT1US	
Q342		8-729-920-39	TRANSISTOR	IMT1US	
Q343		8-729-920-39	TRANSISTOR	IMT1US	
Q345		8-729-422-29	TRANSISTOR	2SD601A-S	
Q346		8-729-422-29	TRANSISTOR	2SD601A-S	
Q347		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q348		8-729-422-37	TRANSISTOR	2SB709A-R	
Q349		8-729-422-37	TRANSISTOR	2SB709A-R	
Q350		8-729-422-37	TRANSISTOR	2SB709A-R	
Q351		8-729-422-29	TRANSISTOR	2SD601A-S	
Q352		8-729-422-29	TRANSISTOR	2SD601A-S	
Q353		8-729-422-29	TRANSISTOR	2SD601A-S	
Q354		8-729-422-29	TRANSISTOR	2SD601A-S	
Q355		8-729-422-29	TRANSISTOR	2SD601A-S	
Q356		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q357		8-729-422-29	TRANSISTOR	2SD601A-S	
Q358		8-729-422-29	TRANSISTOR	2SD601A-S	
Q359		8-729-422-37	TRANSISTOR	2SB709A-R	
Q360		8-729-907-26	TRANSISTOR	IMX1	
Q361		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q362		8-729-422-29	TRANSISTOR	2SD601A-S	
Q363		8-729-422-29	TRANSISTOR	2SD601A-S	
Q364		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q366		8-729-422-37	TRANSISTOR	2SB709A-R	
Q367		8-729-422-37	TRANSISTOR	2SB709A-R	
Q368		8-729-422-37	TRANSISTOR	2SB709A-R	
Q369		8-729-027-38	TRANSISTOR	DTA144EKA-T146	
Q372		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q401		8-729-422-29	TRANSISTOR	2SD601A-S	
Q402		8-729-422-29	TRANSISTOR	2SD601A-S	
Q403		1-801-806-11	TRANSISTOR	DTC144EKA-T146	
Q404		8-729-422-37	TRANSISTOR	2SB709A-R	

REF NO.	PART NO.	DESCRIPTION	REMARK
Q405	8-729-422-37	TRANSISTOR 2SB709A-R	
Q406	8-729-422-29	TRANSISTOR 2SD601A-S	
Q407	8-729-422-29	TRANSISTOR 2SD601A-S	
Q408	8-729-422-37	TRANSISTOR 2SB709A-R	
Q409	8-729-422-37	TRANSISTOR 2SB709A-R	
Q410	8-729-907-26	TRANSISTOR IMX1	
Q411	8-729-422-29	TRANSISTOR 2SD601A-S	
Q412	8-729-216-22	TRANSISTOR 2SA1162-G	
Q413	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q414	8-729-422-37	TRANSISTOR 2SB709A-R	
Q415	8-729-422-37	TRANSISTOR 2SB709A-R	
Q416	8-729-422-37	TRANSISTOR 2SB709A-R	
Q417	8-729-422-37	TRANSISTOR 2SB709A-R	
Q418	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q419	8-729-422-37	TRANSISTOR 2SB709A-R	
Q420	8-729-422-37	TRANSISTOR 2SB709A-R	
Q421	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q422	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q423	8-729-422-29	TRANSISTOR 2SD601A-S	
Q424	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q425	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q426	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q428	8-729-422-37	TRANSISTOR 2SB709A-R	
Q429	8-729-422-37	TRANSISTOR 2SB709A-R	
Q430	8-729-422-29	TRANSISTOR 2SD601A-S	
Q431	8-729-422-29	TRANSISTOR 2SD601A-S	
Q432	8-729-422-29	TRANSISTOR 2SD601A-S	
Q433	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q434	8-729-422-29	TRANSISTOR 2SD601A-S	
Q435	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q436	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q437	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q438	8-729-422-29	TRANSISTOR 2SD601A-S	
Q439	8-729-216-22	TRANSISTOR 2SA1162-G	
Q440	8-729-422-29	TRANSISTOR 2SD601A-S	
Q441	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q442	8-729-422-29	TRANSISTOR 2SD601A-S	
Q443	8-729-216-22	TRANSISTOR 2SA1162-G	
Q444	8-729-422-29	TRANSISTOR 2SD601A-S	
Q445	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q446	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q447	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q448	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q449	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q500	8-729-422-37	TRANSISTOR 2SB709A-R	
Q501	8-729-821-87	TRANSISTOR 2SD1878-CA	
Q502	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q505	8-729-422-29	TRANSISTOR 2SD601A-S	
Q506	8-729-422-29	TRANSISTOR 2SD601A-S	
Q507	8-729-422-29	TRANSISTOR 2SD601A-S	
Q508	8-729-422-37	TRANSISTOR 2SB709A-R	
Q509	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q510	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q511	8-729-422-29	TRANSISTOR 2SD601A-S	
Q513	8-729-122-03	TRANSISTOR 2SA1220A-P	
Q514	8-729-901-00	TRANSISTOR DTC124EK	
Q515	8-729-106-92	TRANSISTOR 2SC2690A-Q	
Q516	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q517	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q518	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q519	1-801-806-11	TRANSISTOR DTC144EKA-T146	
Q520	8-729-021-82	TRANSISTOR 2SD2396K	
Q522	8-729-422-29	TRANSISTOR 2SD601A-S	
Q523	8-729-422-29	TRANSISTOR 2SD601A-S	
Q524	8-729-422-29	TRANSISTOR 2SD601A-S	
Q525	8-729-422-37	TRANSISTOR 2SB709A-R	
Q526	8-729-020-07	TRANSISTOR 2SC4686A(LBSONY)	
Q527	8-729-020-07	TRANSISTOR 2SC4686A(LBSONY)	
Q531	8-729-216-22	TRANSISTOR 2SA1162-G	
Q532	8-729-931-45	TRANSISTOR IRF614	
		<RESISTOR>	
R101	1-216-025-91	RES,CHIP 100 5% 1/10W	
R102	1-216-025-91	RES,CHIP 100 5% 1/10W	
R103	1-216-025-91	RES,CHIP 100 5% 1/10W	
R104	1-216-073-00	RES,CHIP 10K 5% 1/10W	
R105	1-216-059-00	RES,CHIP 2.7K 5% 1/10W	
R106	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R107	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R108	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R109	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R110	1-216-073-00	RES,CHIP 10K 5% 1/10W	
R113	1-216-085-00	RES,CHIP 33K 5% 1/10W	
R117	1-216-073-00	RES,CHIP 10K 5% 1/10W	
R119	1-216-073-00	RES,CHIP 10K 5% 1/10W	
R124	1-216-295-91	SHORT 0	
R130	1-216-099-00	RES,CHIP 120K 5% 1/10W	
R132	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R133	1-216-091-00	RES,CHIP 56K 5% 1/10W	
R134	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R135	1-216-085-00	RES,CHIP 33K 5% 1/10W	
R137	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R140	1-216-033-00	RES,CHIP 220 5% 1/10W	
R141	1-216-085-00	RES,CHIP 33K 5% 1/10W	
R144	1-216-295-91	SHORT 0	
R149	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R151	1-216-061-00	RES,CHIP 3.3K 5% 1/10W	
R154	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R155	1-216-083-00	RES,CHIP 27K 5% 1/10W	
R157	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R158	1-216-295-91	SHORT 0	
R159	1-216-063-91	RES,CHIP 3.9K 5% 1/10W	
R160	1-216-061-00	RES,CHIP 3.3K 5% 1/10W	
R162	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R163	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R164	1-216-067-00	RES,CHIP 5.6K 5% 1/10W	
R165	1-216-295-91	SHORT 0	
R167	1-216-061-00	RES,CHIP 3.3K 5% 1/10W	
R168	1-216-085-00	RES,CHIP 33K 5% 1/10W	
R169	1-216-107-00	RES,CHIP 270K 5% 1/10W	
R171	1-216-031-00	RES,CHIP 180 5% 1/10W	
R172	1-216-295-91	SHORT 0	
R177	1-216-214-00	RES,CHIP 4.7K 5% 1/8W	
R181	1-216-065-91	RES,CHIP 4.7K 5% 1/10W	
R184	1-216-649-11	METAL CHIP 820 0.50% 1/10W	
R185	1-216-073-00	RES,CHIP 10K 5% 1/10W	
R187	1-216-061-00	RES,CHIP 3.3K 5% 1/10W	

A

REF NO.	PART NO.	DESCRIPTION				REMARK
R189	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R190	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R192	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R195	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R197	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R199	1-216-295-91	SHORT	0			
R200	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R201	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R202	1-212-857-00	FUSIBLE	10	5%	1/4W	F
R203	1-260-095-11	CARBON	470	5%	1/2W	
R204	1-260-072-11	CARBON	4.7	5%	1/2W	
R205	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R206	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R207	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R208	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R209	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R210	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R211	1-249-393-11	CARBON	10	5%	1/4W	F
R237	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R301	1-216-025-91	RES,CHIP	100	5%	1/10W	
R302	1-216-025-91	RES,CHIP	100	5%	1/10W	
R303	1-216-025-91	RES,CHIP	100	5%	1/10W	
R304	1-216-025-91	RES,CHIP	100	5%	1/10W	
R305	1-216-295-91	SHORT	0			
R306	1-216-295-91	SHORT	0			
R307	1-216-115-00	RES,CHIP	560K	5%	1/10W	
R308	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R311	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R312	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R313	1-216-648-11	METAL CHIP	750	0.50%	1/10W	
R314	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R315	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R316	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R317	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R318	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R319	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R320	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R321	1-216-051-00	RES,CHIP	1.2K	5%	1/10W	
R322	1-216-035-00	RES,CHIP	270	5%	1/10W	
R323	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R324	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R325	1-216-037-00	RES,CHIP	330	5%	1/10W	
R326	1-216-033-00	RES,CHIP	220	5%	1/10W	
R328	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R329	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R330	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R331	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R332	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R333	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R334	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R335	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R336	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R337	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R338	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R339	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R340	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R341	1-216-673-11	METAL CHIP	8.2K	0.50%	1/10W	
R342	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R343	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R344	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R345	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R346	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R347	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R348	1-216-031-00	RES,CHIP	180	5%	1/10W	
R349	1-216-694-11	METAL CHIP	62K	0.50%	1/10W	
R350	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R351	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R352	1-216-675-91	METAL CHIP	10K	0.50%	1/10W	
R353	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R354	1-216-123-11	RES,CHIP	1.2M	5%	1/10W	
R355	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R356	1-216-689-11	RES,CHIP	39K	5%	1/10W	
R357	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R358	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R359	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R360	1-216-039-00	RES,CHIP	390	5%	1/10W	
R361	1-216-017-91	RES,CHIP	47	5%	1/10W	
R362	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R363	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R364	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R366	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R367	1-216-051-00	RES,CHIP	1.2K	5%	1/10W	
R368	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R371	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R372	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R373	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R374	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R375	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R376	1-216-111-00	RES,CHIP	390K	5%	1/10W	
R378	1-216-114-00	RES,CHIP	510K	5%	1/10W	
R379	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R380	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R381	1-216-689-11	RES,CHIP	39K	5%	1/10W	
R382	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R383	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R384	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R385	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R386	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R387	1-216-029-00	RES,CHIP	150	5%	1/10W	
R388	1-216-039-00	RES,CHIP	390	5%	1/10W	
R389	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R390	1-249-393-11	CARBON	10	5%	1/4W	F
R391	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R393	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R394	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R395	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R396	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R397	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R398	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R399	1-216-111-00	RES,CHIP	390K	5%	1/10W	
R400	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R401	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R402	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R403	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R404	1-216-029-00	RES,CHIP	150	5%	1/10W	
R406	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R407	1-216-085-00	RES,CHIP	33K	5%	1/10W	

REF NO.	PART NO.	DESCRIPTION				REMARK
R408	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R410	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R411	1-216-033-00	RES,CHIP	220	5%	1/10W	
R412	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R413	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R416	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R417	1-216-665-11	METAL CHIP	3.9K	0.50%	1/10W	
R418	1-216-667-11	METAL CHIP	4.7K	0.50%	1/10W	
R419	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R420	1-216-687-11	METAL CHIP	33K	0.50%	1/10W	
R422	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R423	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R424	1-216-033-00	RES,CHIP	220	5%	1/10W	
R425	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R426	1-216-039-00	RES,CHIP	390	5%	1/10W	
R427	1-216-033-00	RES,CHIP	220	5%	1/10W	
R428	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R429	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R430	1-216-119-00	RES,CHIP	820K	5%	1/10W	
R431	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R432	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R434	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R435	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R436	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R437	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R438	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R439	1-216-033-00	RES,CHIP	220	5%	1/10W	
R440	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R441	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R442	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R443	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R444	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R445	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R447	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R448	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R449	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R450	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R451	1-216-037-00	RES,CHIP	330	5%	1/10W	
R452	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R453	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R455	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R456	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R457	1-216-025-91	RES,CHIP	100	5%	1/10W	
R458	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R459	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R460	1-216-295-91	SHORT	0			
R462	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R463	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R464	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R465	1-216-025-91	RES,CHIP	100	5%	1/10W	
R466	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R467	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R468	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R469	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R470	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R471	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R472	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R473	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R474	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R475	1-216-025-91	RES,CHIP	100	5%	1/10W	
R476	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R477	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R478	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R479	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R480	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R481	1-216-033-00	RES,CHIP	220	5%	1/10W	
R482	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R483	1-216-025-91	RES,CHIP	100	5%	1/10W	
R484	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R485	1-216-033-00	RES,CHIP	220	5%	1/10W	
R486	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R487	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R488	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R489	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R490	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R491	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R492	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R493	1-216-295-91	SHORT	0			
R494	1-216-696-11	METAL CHIP	75K	0.50%	1/10W	
R495	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R496	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R497	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R498	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R499	1-216-033-00	RES,CHIP	220	5%	1/10W	
R500	1-216-689-11	RES,CHIP	39K	5%	1/10W	
R501	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R502	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R503	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R504	1-216-111-00	RES,CHIP	390K	5%	1/10W	
R505	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R506	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R507	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R508	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R509	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R510	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R511	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R512	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R513	1-216-295-91	SHORT	0			
R514	1-216-295-91	SHORT	0			
R515	1-216-675-91	METAL CHIP	10K	0.50%	1/10W	
R516	1-216-103-00	RES,CHIP	180K	5%	1/10W	
R517	1-214-888-00	METAL	10K	1%	1/2W	
R518	1-260-123-11	CARBON	100K	5%	1/2W	
R519	1-216-017-91	RES,CHIP	47	5%	1/10W	
R520	1-249-423-11	CARBON	3.3K	5%	1/4W	F
R521	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R523	1-215-892-11	METAL OXIDE	1K	5%	2W	F
R524	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R525	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R526	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R527	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R528	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R529	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R530	1-216-367-11	METAL OXIDE	0.68	5%	2W	F
R531	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R532	1-215-920-11	METAL OXIDE	3.3K	5%	3W	F
R533	1-247-723-11	CARBON	6.8K	5%	1/4W	F

A

REF NO.	PART NO.	DESCRIPTION				REMARK
R534	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R535	1-249-448-11	CARBON	1.2	5%	1/4W	F
R536	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R537	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R539	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R540	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R541	1-249-383-11	CARBON	1.5	5%	1/4W	F
R542	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R543	1-212-883-00	FUSIBLE	120	5%	1/4W	F
R544	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R545	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R546	1-249-425-11	CARBON	4.7K	5%	1/4W	F
R547	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R548	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R549	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R550	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R551	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R552	1-216-033-00	RES,CHIP	220	5%	1/10W	
R553	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R554	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R555	1-216-692-11	METAL CHIP	51K	0.50%	1/10W	
R556	1-215-899-11	METAL OXIDE	15K	5%	2W	F
R558	1-215-868-00	METAL OXIDE	680	5%	1W	F
R559	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R560	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R561	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R562	1-247-696-11	CARBON	47	5%	1/4W	F
R563	1-216-017-91	RES,CHIP	47	5%	1/10W	
R564	1-216-107-00	RES,CHIP	270K	5%	1/10W	
R565	1-216-033-00	RES,CHIP	220	5%	1/10W	
R566	1-216-691-11	METAL CHIP	47K	0.50%	1/10W	
R567	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R568	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R569	1-260-114-11	CARBON	18K	5%	1/2W	
R571	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R572	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R573	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R574	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R575	1-249-383-11	CARBON	1.5	5%	1/4W	F
R576	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R577	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R578	1-216-693-11	METAL CHIP	56K	0.50%	1/10W	
R580	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R581	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R582	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R583	1-216-039-00	RES,CHIP	390	5%	1/10W	
R584	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R585	1-216-033-00	RES,CHIP	220	5%	1/10W	
R586	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R587	1-216-675-91	METAL CHIP	10K	0.50%	1/10W	
R588	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R589	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R590	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R591	1-216-682-11	METAL CHIP	20K	0.50%	1/10W	
R592	1-247-688-11	CARBON	10	5%	1/4W	F
R593	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R594	1-260-104-91	CARBON	2.7K	5%	1/2W	
R595	1-216-689-11	RES,CHIP	39K	5%	1/10W	
R596	1-214-754-00	METAL	11K	1%	1/4W	
R597	1-249-417-11	CARBON	1K	5%	1/4W	F
R598	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R599	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1103	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R1104	1-216-699-11	METAL CHIP	100K	0.50%	1/10W	
R1105	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1106	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1107	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R1108	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1111	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1112	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1113	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1114	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1115	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1116	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R1117	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R1118	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1119	1-216-694-11	METAL CHIP	62K	0.50%	1/10W	
R1120	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1123	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1124	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1125	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1126	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1128	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1129	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1130	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1131	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1132	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1133	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R1134	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1136	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1137	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1138	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1139	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R1140	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R1141	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1142	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R1143	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R1144	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1145	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R1146	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1147	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1150	1-216-037-00	RES,CHIP	330	5%	1/10W	
R1151	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1155	1-216-133-00	RES,CHIP	3.3M	5%	1/10W	
R1161	1-218-776-11	METAL CHIP	1M	0.50%	1/10W	
R1162	1-218-768-11	METAL CHIP	470K	0.50%	1/10W	
R1163	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1164	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1165	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1167	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1168	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1169	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1170	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1171	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1172	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1173	1-216-295-91	SHORT	0			

REF NO.	PART NO.	DESCRIPTION				REMARK
R1174	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1177	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1179	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1180	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1182	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1183	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1184	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1185	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1186	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1187	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1188	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1189	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1190	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1191	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1192	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1193	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1194	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1195	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1196	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1197	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1198	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1301	1-216-029-00	RES,CHIP	150	5%	1/10W	
R1302	1-216-029-00	RES,CHIP	150	5%	1/10W	
R1303	1-216-039-00	RES,CHIP	390	5%	1/10W	
R1304	1-216-689-11	RES,CHIP	39K	5%	1/10W	
R1305	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1306	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1307	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R1308	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1309	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1311	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1312	1-216-027-00	RES,CHIP	120	5%	1/10W	
R1313	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1314	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1315	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1316	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1317	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1318	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1319	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1320	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1321	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R1322	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1324	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R1325	1-216-652-11	METAL CHIP	1.1K	0.50%	1/10W	
R1326	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1327	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1328	1-216-125-00	RES,CHIP	1.5M	5%	1/10W	
R1329	1-216-103-00	RES,CHIP	180K	5%	1/10W	
R1330	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1331	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R1332	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R1333	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1334	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R1335	1-249-401-11	CARBON	47	5%	1/4W	F
R1336	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R1337	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R1338	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1339	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1340	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1341	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1342	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R1343	1-216-037-00	RES,CHIP	330	5%	1/10W	
R1344	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R1345	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R1346	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1347	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1348	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1349	1-216-035-00	RES,CHIP	270	5%	1/10W	
R1350	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1351	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1352	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1353	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1354	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1355	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1356	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R1357	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R1358	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1359	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R1360	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1361	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1362	1-216-676-11	METAL CHIP	11K	0.50%	1/10W	
R1363	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1364	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1365	1-216-131-11	RES,CHIP	2.7M	5%	1/10W	
R1366	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1367	1-216-660-11	METAL CHIP	2.4K	0.50%	1/10W	
R1368	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R1369	1-216-051-00	RES,CHIP	1.2K	5%	1/10W	
R1370	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R1371	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1372	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1373	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R1374	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R1375	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1376	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1378	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1379	1-216-037-00	RES,CHIP	330	5%	1/10W	
R1380	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1381	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1382	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1383	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1384	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R1385	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1386	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R1387	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R1388	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1389	1-216-657-11	METAL CHIP	1.8K	0.50%	1/10W	
R1390	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1391	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1392	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1393	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R1394	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1395	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1396	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1397	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1399	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1401	1-216-085-00	RES,CHIP	33K	5%	1/10W	

A

REF NO.	PART NO.	DESCRIPTION				REMARK
R1402	1-216-295-91	SHORT	0			
R1403	1-216-651-11	METAL CHIP	1K	0.50%	1/10W	
R1404	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1405	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1406	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W	
R1407	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R1408	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1409	1-216-295-91	SHORT	0			
R1410	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R1411	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1412	1-216-107-00	RES,CHIP	270K	5%	1/10W	
R1413	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1414	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1415	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R1416	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1417	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1418	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1419	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1420	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1421	1-216-649-11	METAL CHIP	820	0.50%	1/10W	
R1422	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1423	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1424	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1425	1-216-013-00	RES,CHIP	33	5%	1/10W	
R1426	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1427	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R1428	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R1429	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W	
R1430	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1431	1-216-129-00	RES,CHIP	2.2M	5%	1/10W	
R1432	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1433	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1434	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1435	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R1436	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1437	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R1438	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1439	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R1440	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1441	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1442	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1443	1-216-013-00	RES,CHIP	33	5%	1/10W	
R1444	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1445	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1446	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1447	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1448	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1449	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1450	1-216-129-00	RES,CHIP	2.2M	5%	1/10W	
R1451	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R1452	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1453	1-216-013-00	RES,CHIP	33	5%	1/10W	
R1454	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1455	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1456	1-216-129-00	RES,CHIP	2.2M	5%	1/10W	
R1457	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1458	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1459	1-216-133-00	RES,CHIP	3.3M	5%	1/10W	
R1460	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1461	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1462	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1463	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R1464	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1465	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1466	1-216-055-00	RES,CHIP	1.8K	5%	1/10W	
R1467	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1468	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R1469	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1470	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1471	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1472	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R1473	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1475	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R1476	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R1477	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1478	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R1480	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1481	1-216-115-00	RES,CHIP	560K	5%	1/10W	
R1482	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1483	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1484	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1485	1-216-113-00	RES,CHIP	470K	5%	1/10W	
R1486	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1487	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1488	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R1489	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R1490	1-216-035-00	RES,CHIP	270	5%	1/10W	
R1491	1-216-035-00	RES,CHIP	270	5%	1/10W	
R1492	1-216-035-00	RES,CHIP	270	5%	1/10W	
R1493	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R1494	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1495	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1496	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1498	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1499	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1500	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1501	1-216-075-00	RES,CHIP	12K	5%	1/10W	
R1502	1-260-105-11	CARBON	3.3K	5%	1/2W	
R1503	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R1504	1-216-686-11	METAL CHIP	30K	0.50%	1/10W	
R1505	1-247-688-11	CARBON	10	5%	1/4W	F
R1506	1-216-033-00	RES,CHIP	220	5%	1/10W	
R1507	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1508	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R1509	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R1510	1-216-077-00	RES,CHIP	15K	5%	1/10W	
R1511	1-216-360-11	METAL OXIDE	8.2	5%	1W	F
R1512	1-216-647-11	METAL CHIP	680	0.50%	1/10W	
R1513	1-247-752-11	CARBON	1K	5%	1/2W	F
R1514	1-247-711-11	CARBON	680	5%	1/4W	F
R1515	1-216-350-11	METAL OXIDE	1.2	5%	1W	F
R1516	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R1517	1-216-109-00	RES,CHIP	330K	5%	1/10W	
R1518	1-215-867-00	METAL OXIDE	470	5%	1W	F
R1519	1-216-355-11	METAL OXIDE	3.3	5%	1W	F
R1520	1-216-027-00	RES,CHIP	120	5%	1/10W	
R1521	1-216-029-00	RES,CHIP	150	5%	1/10W	

REF NO.	PART NO.	DESCRIPTION				REMARK
R1523	1-216-350-11	METAL OXIDE	1.2	5%	1W	F
R1524	1-216-427-00	METAL OXIDE	120	5%	1W	F
R1525	1-216-083-00	RES,CHIP	27K	5%	1/10W	
R1526	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1527	1-249-413-11	CARBON	470	5%	1/4W	F
R1528	1-215-869-11	METAL OXIDE	1K	5%	1W	F
R1529	1-202-829-11	SOLID	8.2K	20%	1/2W	
R1530	1-216-115-00	RES,CHIP	560K	5%	1/10W	
R1531	1-247-697-11	CARBON	56	5%	1/4W	F
R1532	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R1533	1-249-414-11	CARBON	560	5%	1/4W	F
R1534	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W	
⋈R1536 ⚠		METALCHIP			1/10W	
R1537	1-249-389-11	CARBON	4.7	5%	1/4W	F
R1538	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1539	1-216-097-91	RES,CHIP	100K	5%	1/10W	
R1540	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R1541	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1542	1-247-692-11	CARBON	22	5%	1/4W	F
R1543	1-216-027-00	RES,CHIP	120	5%	1/10W	
R1547	1-216-393-00	METAL OXIDE	2.2	5%	3W	F
R1548	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R1549	1-260-094-11	CARBON	390	5%	1/2W	
R1550	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R1551	1-249-393-11	CARBON	10	5%	1/4W	F
R1552	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R1553	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R1554	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R1555	1-216-295-91	SHORT	0			
R1556	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R1557	1-218-760-11	METAL CHIP	220K	0.50%	1/10W	
R1558	1-249-393-11	CARBON	10	5%	1/4W	F
R1559	1-249-393-11	CARBON	10	5%	1/4W	F
R1560	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R1567	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1568	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R1569	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1570	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1571	1-216-103-00	RES,CHIP	180K	5%	1/10W	
R1572	1-216-101-00	RES,CHIP	150K	5%	1/10W	
R1573	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R1574	1-216-041-00	RES,CHIP	470	5%	1/10W	
R1575	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1576	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1577	1-216-025-91	RES,CHIP	100	5%	1/10W	
R1578	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R1579	1-216-689-11	METAL CHIP	39K	0.50%	1/10W	
R1580	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R1581	1-208-612-11	METAL OXIDE	10M	5%	1W	
R1582	1-208-610-11	METAL OXIDE	2M	5%	1W	
R1583	1-212-998-00	FUSIBLE	470	5%	1/2W	F
R1599	1-202-830-00	SOLID	10K	20%	1/2W	
R2300	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R2301	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R2302	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W	
R2303	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R2304	1-216-105-91	RES,CHIP	220K	5%	1/10W	
R2305	1-216-085-00	RES,CHIP	33K	5%	1/10W	
R2306	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R2307	1-216-033-00	RES,CHIP	220	5%	1/10W	
R2308	1-216-103-00	RES,CHIP	180K	5%	1/10W	
R2309	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2310	1-216-095-00	RES,CHIP	82K	5%	1/10W	
R2311	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R2312	1-216-053-00	RES,CHIP	1.5K	5%	1/10W	
R2313	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2314	1-216-645-11	METAL CHIP	560	0.50%	1/10W	
R2315	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R2316	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R2317	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2318	1-216-069-00	RES,CHIP	6.8K	5%	1/10W	
R2319	1-216-093-91	RES,CHIP	68K	5%	1/10W	
R2320	1-216-677-11	METAL CHIP	12K	0.50%	1/10W	
R2321	1-216-057-00	RES,CHIP	2.2K	5%	1/10W	
R2322	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R2323	1-216-683-11	METAL CHIP	22K	0.50%	1/10W	
R2324	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R2325	1-216-063-91	RES,CHIP	3.9K	5%	1/10W	
R2326	1-216-041-00	RES,CHIP	470	5%	1/10W	
R2327	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R2328	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2329	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R2330	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2331	1-216-059-00	RES,CHIP	2.7K	5%	1/10W	
R2332	1-216-049-91	RES,CHIP	1K	5%	1/10W	
R2333	1-216-089-91	RES,CHIP	47K	5%	1/10W	
R2334	1-216-041-00	RES,CHIP	470	5%	1/10W	
R2335	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2336	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R2337	1-216-037-00	RES,CHIP	330	5%	1/10W	
R2338	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R2339	1-216-037-00	RES,CHIP	330	5%	1/10W	
R2340	1-216-073-00	RES,CHIP	10K	5%	1/10W	
R2341	1-216-037-00	RES,CHIP	330	5%	1/10W	
R2342	1-216-071-00	RES,CHIP	8.2K	5%	1/10W	
R2343	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R2344	1-216-121-91	RES,CHIP	1M	5%	1/10W	
R2345	1-216-681-11	METAL CHIP	18K	0.50%	1/10W	
R2346	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2347	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2348	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2349	1-216-679-11	METAL CHIP	15K	0.50%	1/10W	
R2350	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2351	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2352	1-216-061-00	RES,CHIP	3.3K	5%	1/10W	
R2353	1-216-041-00	RES,CHIP	470	5%	1/10W	
R2354	1-216-025-91	RES,CHIP	100	5%	1/10W	
R2357	1-216-091-00	RES,CHIP	56K	5%	1/10W	
R2358	1-216-025-91	RES,CHIP	100	5%	1/10W	
R2361	1-216-099-00	RES,CHIP	120K	5%	1/10W	
R2362	1-216-081-00	RES,CHIP	22K	5%	1/10W	
R2363	1-216-065-91	RES,CHIP	4.7K	5%	1/10W	
R2364	1-216-025-91	RES,CHIP	100	5%	1/10W	
R2365	1-216-687-11	METAL CHIP	33K	0.50%	1/10W	
R2366	1-216-067-00	RES,CHIP	5.6K	5%	1/10W	
R2367	1-216-099-00	RES,CHIP	120K	5%	1/10W	

A

REF NO.	PART NO.	DESCRIPTION			REMARK
R2368	1-216-065-91	RES,CHIP	4.7K	5%	1/10W
R2369	1-216-675-91	METAL CHIP	10K	0.50%	1/10W
R2371	1-216-049-91	RES,CHIP	1K	5%	1/10W
R2372	1-216-113-00	RES,CHIP	470K	5%	1/10W
R2374	1-216-097-91	RES,CHIP	100K	5%	1/10W
R2375	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2376	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2377	1-216-033-00	RES,CHIP	220	5%	1/10W
R2378	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2379	1-216-033-00	RES,CHIP	220	5%	1/10W
R2380	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2381	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2382	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2383	1-216-033-00	RES,CHIP	220	5%	1/10W
R2384	1-216-689-11	RES,CHIP	39K	5%	1/10W
R2385	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2386	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2387	1-216-222-00	RES,CHIP	10K	5%	1/8W
R2388	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2389	1-216-033-00	RES,CHIP	220	5%	1/10W
R2390	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R2391	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R2392	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2393	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2394	1-216-081-00	RES,CHIP	22K	5%	1/10W
R2396	1-216-041-00	RES,CHIP	470	5%	1/10W
R2397	1-216-113-00	RES,CHIP	470K	5%	1/10W
R2398	1-216-109-00	RES,CHIP	330K	5%	1/10W
R2399	1-216-073-00	RES,CHIP	10K	5%	1/10W
R2501	1-216-083-00	RES,CHIP	27K	5%	1/10W
R2502	1-216-083-00	RES,CHIP	27K	5%	1/10W
R2503	1-216-089-91	RES,CHIP	47K	5%	1/10W
R2504	1-216-101-00	RES,CHIP	150K	5%	1/10W
R2551	1-216-091-00	RES,CHIP	56K	5%	1/10W
R2552	1-216-085-00	RES,CHIP	33K	5%	1/10W
R2553	1-216-083-00	RES,CHIP	27K	5%	1/10W
R2555	1-216-055-00	RES,CHIP	1.8K	5%	1/10W
R2556	1-216-051-00	RES,CHIP	1.2K	5%	1/10W
R2557	1-216-067-00	RES,CHIP	5.6K	5%	1/10W
R2558	1-216-057-00	RES,CHIP	2.2K	5%	1/10W
R2559	1-216-039-00	RES,CHIP	390	5%	1/10W
R2560	1-216-069-00	RES,CHIP	6.8K	5%	1/10W
R2561	1-216-001-00	RES,CHIP	10	5%	1/10W
R2562	1-216-001-00	RES,CHIP	10	5%	1/10W
R2563	1-216-057-00	RES,CHIP	2.2K	5%	1/10W
R3301	1-216-073-00	RES,CHIP	10K	5%	1/10W
R3302	1-216-065-91	RES,CHIP	4.7K	5%	1/10W
R3303	1-216-065-91	RES,CHIP	4.7K	5%	1/10W
R3304	1-216-065-91	RES,CHIP	4.7K	5%	1/10W
R3305	1-216-061-00	RES,CHIP	3.3K	5%	1/10W
R3306	1-216-067-00	RES,CHIP	5.6K	5%	1/10W
R3308	1-216-097-91	RES,CHIP	100K	5%	1/10W
R3309	1-216-073-00	RES,CHIP	10K	5%	1/10W
R3310	1-216-049-91	RES,CHIP	1K	5%	1/10W
R3311	1-216-689-11	RES,CHIP	39K	5%	1/10W
R3312	1-216-095-00	RES,CHIP	82K	5%	1/10W
R3317	1-216-675-91	METAL CHIP	10K	0.50%	1/10W
R3320	1-216-085-00	RES,CHIP	33K	5%	1/10W
R3323	1-216-089-91	RES,CHIP	47K	5%	1/10W

REF NO.	PART NO.	DESCRIPTION			REMARK
R3333	1-216-113-00	RES,CHIP	470K	5%	1/10W
R3334	1-216-073-00	RES,CHIP	10K	5%	1/10W
R3335	1-216-113-00	RES,CHIP	470K	5%	1/10W
R3337	1-216-099-00	RES,CHIP	120K	5%	1/10W
R3338	1-216-103-00	RES,CHIP	180K	5%	1/10W
R3339	1-216-093-91	RES,CHIP	68K	5%	1/10W
R3340	1-216-099-00	RES,CHIP	120K	5%	1/10W
R3344	1-216-081-00	RES,CHIP	22K	5%	1/10W
R3345	1-216-033-00	RES,CHIP	220	5%	1/10W
R3346	1-216-025-91	RES,CHIP	100	5%	1/10W
R3347	1-216-025-91	RES,CHIP	100	5%	1/10W
R3348	1-216-025-91	RES,CHIP	100	5%	1/10W
R3349	1-216-025-91	RES,CHIP	100	5%	1/10W
R3350	1-216-113-00	RES,CHIP	470K	5%	1/10W
R3351	1-216-115-00	RES,CHIP	560K	5%	1/10W
R3355	1-216-089-91	RES,CHIP	47K	5%	1/10W
R3356	1-216-051-00	RES,CHIP	1.2K	5%	1/10W
R3357	1-216-051-00	RES,CHIP	1.2K	5%	1/10W
R3358	1-216-051-00	RES,CHIP	1.2K	5%	1/10W
R3359	1-216-081-00	RES,CHIP	22K	5%	1/10W
R3360	1-216-073-00	RES,CHIP	10K	5%	1/10W
R3361	1-216-089-91	RES,CHIP	47K	5%	1/10W
R3362	1-216-049-91	RES,CHIP	1K	5%	1/10W
R3363	1-216-049-91	RES,CHIP	1K	5%	1/10W
R3364	1-216-073-00	RES,CHIP	10K	5%	1/10W
R3376	1-216-081-00	RES,CHIP	22K	5%	1/10W
R3377	1-216-107-00	RES,CHIP	270K	5%	1/10W
R3378	1-216-115-00	RES,CHIP	560K	5%	1/10W
R3381	1-216-041-00	RES,CHIP	470	5%	1/10W
R3382	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R3383	1-216-069-00	RES,CHIP	6.8K	5%	1/10W
R3384	1-216-063-91	RES,CHIP	3.9K	5%	1/10W
R3385	1-216-057-00	RES,CHIP	2.2K	5%	1/10W
R3386	1-216-057-00	RES,CHIP	2.2K	5%	1/10W
R3390	1-216-057-00	RES,CHIP	2.2K	5%	1/10W
R3393	1-216-045-00	RES,CHIP	680	5%	1/10W
R3394	1-216-089-91	RES,CHIP	47K	5%	1/10W
R3395	1-216-049-91	RES,CHIP	1K	5%	1/10W
R3396	1-216-041-00	RES,CHIP	470	5%	1/10W
R3397	1-216-045-00	RES,CHIP	680	5%	1/10W
R3398	1-216-685-11	METAL CHIP	27K	0.50%	1/10W
R4401	1-216-085-00	RES,CHIP	33K	5%	1/10W
R4402	1-216-113-00	RES,CHIP	470K	5%	1/10W
R4404	1-216-073-00	RES,CHIP	10K	5%	1/10W
R4405	1-216-067-00	RES,CHIP	5.6K	5%	1/10W
R4407	1-216-061-00	RES,CHIP	3.3K	5%	1/10W
R4408	1-216-059-00	RES,CHIP	2.7K	5%	1/10W
R4409	1-216-059-00	RES,CHIP	2.7K	5%	1/10W
R4410	1-216-059-00	RES,CHIP	2.7K	5%	1/10W
R4411	1-216-113-00	RES,CHIP	470K	5%	1/10W
R4412	1-216-113-00	RES,CHIP	470K	5%	1/10W
R4413	1-216-295-91	SHORT	0		
R4414	1-216-295-91	SHORT	0		
R4415	1-216-295-91	SHORT	0		
R4416	1-216-295-91	SHORT	0		
		<VARIABLE RESISTOR >			
RV501	1-223-102-00	RES, ADJ, WIREWOUND 120 (H.CENT)			

REF NO.		PART NO.	DESCRIPTION				REMARK
			<TRANSFORMER>				
T300		1-406-781-11	COIL				
T500		1-426-668-11	TRANSFORMER, FERRITE (HDT)				
T501	⚠	1-453-233-11	TRANSFORMER ASSY, FLYBACK				
T501		* 4-058-301-01	RING, SHORT				
T502		1-413-059-00	TRANSFORMER, FERRITE (DFT)				
			<THERMISTOR>				
TH500		1-807-970-11	THERMISTOR				
			<OSCILLATOR>				
X101		1-579-175-11	VIBRATOR, CERAMIC (10MHz)				
X300		1-577-259-11	VIBRATOR, CRYSTAL (17.73MHz)				
X301		1-527-722-00	VIBRATOR, CRYSTAL (14.32MHz)				
**********							
		* A-1331-627-B	C MOUNTED PWB				
			**********				
		7-682-949-01	SCREW+PSW 3X10				
			<CAPACITOR>				
C701		1-102-157-00	CERAMIC	560PF	10%	500V	
C702		1-102-157-00	CERAMIC	560PF	10%	500V	
C703		1-102-157-00	CERAMIC	560PF	10%	500V	
C704		1-102-121-00	CERAMIC	0.0022MF	10%	50V	
C705		1-126-933-11	ELECT	100MF	20%	16V	
C706		1-102-074-00	CERAMIC	0.001MF	10%	50V	
C707		1-162-116-00	CERAMIC	680PF	10%	2KV	
C708		1-136-601-11	FILM	0.01MF	5%	630V	
C710		1-101-880-00	CERAMIC	47PF	5%	50V	
C711		1-101-880-00	CERAMIC	47PF	5%	50V	
C712		1-101-880-00	CERAMIC	47PF	5%	50V	
C713		1-107-651-11	ELECT	4.7MF	20%	250V	
C714		1-102-976-00	CERAMIC	180PF	5%	50V	
C715		1-102-976-00	CERAMIC	180PF	5%	50V	
C716		1-102-976-00	CERAMIC	180PF	5%	50V	
C717		1-117-450-11	FILM	0.47MF	10%	250V	
C718		1-117-450-11	FILM	0.47MF	10%	250V	
C720		1-136-187-11	FILM	0.047MF	10%	250V	
C734		1-102-973-00	CERAMIC	100PF	5%	50V	
C735		1-102-816-00	CERAMIC	120PF	5%	50V	
C736		1-102-816-00	CERAMIC	120PF	5%	50V	
C740		1-162-114-00	CERAMIC	0.0047MF	2KV		
			<CONNECTOR>				
CN701		* 1-564-511-11	PLUG, CONNECTOR 8P				
CN702		* 1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P				
CN703		1-695-915-11	TAB (CONTACT)				
CN704		1-695-915-11	TAB (CONTACT)				
			<DIODE>				
D701		8-719-911-19	DIODE 1SS119-25				
D702		8-719-911-19	DIODE 1SS119-25				
D703		8-719-911-19	DIODE 1SS119-25				
D704		8-719-911-19	DIODE 1SS119-25				
D705		8-719-911-19	DIODE 1SS119-25				
D706		8-719-911-19	DIODE 1SS119-25				
D707		8-719-901-83	DIODE 1SS83				
D708		8-719-901-83	DIODE 1SS83				
D709		8-719-901-83	DIODE 1SS83				
D713		8-719-901-83	DIODE 1SS83				
D715		8-719-901-83	DIODE 1SS83				
D716		8-719-901-83	DIODE 1SS83				
D717		8-719-901-83	DIODE 1SS83				
			<JACK>				
J701	⚠	1-251-116-12	SOCKET, CRT				
			<COIL>				
L701		1-410-667-31	INDUCTOR	22µH			
L705		1-412-534-31	INDUCTOR	56µH			
			<TRANSISTOR>				
Q701		8-729-119-78	TRANSISTOR 2SC2785-HFE				
Q702		8-729-119-78	TRANSISTOR 2SC2785-HFE				
Q703		8-729-119-78	TRANSISTOR 2SC2785-HFE				
Q704		8-729-200-17	TRANSISTOR 2SA1091-O				
Q705		8-729-200-17	TRANSISTOR 2SA1091-O				
Q706		8-729-200-17	TRANSISTOR 2SA1091-O				
Q707		8-729-326-11	TRANSISTOR 2SC2611				
Q708		8-729-326-11	TRANSISTOR 2SC2611				
Q709		8-729-326-11	TRANSISTOR 2SC2611				
Q710		8-729-200-17	TRANSISTOR 2SA1091-O				
Q711		8-729-200-17	TRANSISTOR 2SA1091-O				
Q712		8-729-200-17	TRANSISTOR 2SA1091-O				
Q713		8-729-255-12	TRANSISTOR 2SC2551-O				
Q714		8-729-255-12	TRANSISTOR 2SC2551-O				
Q715		8-729-119-78	TRANSISTOR 2SC2785-HFE				
Q716		8-729-119-78	TRANSISTOR 2SC2785-HFE				
Q717		8-729-119-78	TRANSISTOR 2SC2785-HFE				
			<RESISTOR>				
R702		1-247-903-00	CARBON	1M	5%	1/4W	
R704		1-215-405-00	METAL	220	1%	1/4W	
R705		1-215-405-00	METAL	220	1%	1/4W	
R706		1-215-405-00	METAL	220	1%	1/4W	
R707		1-249-431-11	CARBON	15K	5%	1/4W	
R708		1-249-431-11	CARBON	15K	5%	1/4W	
R709		1-249-431-11	CARBON	15K	5%	1/4W	
R710		1-215-391-00	METAL	56	1%	1/4W	
R711		1-215-394-00	METAL	75	1%	1/4W	
R712		1-215-392-00	METAL	62	1%	1/4W	
R715		1-202-818-00	SOLID	1K	20%	1/2W	
R716		1-216-486-00	METAL OXIDE	8.2K	5%	3W	F
R717		1-202-818-00	SOLID	1K	20%	1/2W	
R718		1-216-486-00	METAL OXIDE	8.2K	5%	3W	F
R719		1-202-818-00	SOLID	1K	20%	1/2W	
R720		1-216-486-00	METAL OXIDE	8.2K	5%	3W	F
R722		1-202-838-00	SOLID	100K	20%	1/2W	
R723		1-202-838-00	SOLID	100K	20%	1/2W	
R724		1-202-842-11	SOLID	220K	20%	1/2W	
R725		1-202-883-11	SOLID	680K	20%	1/2W	
R727		1-202-816-11	SOLID	68K	10%	1/2W	
R731		1-247-815-91	CARBON	220	5%	1/4W	

C G

REF NO.		PART NO.	DESCRIPTION				REMARK
R732		1-247-815-91	CARBON	220	5%	1/4W	
R733		1-247-815-91	CARBON	220	5%	1/4W	
R734		1-249-409-11	CARBON	220	5%	1/4W	F
R735		1-249-409-11	CARBON	220	5%	1/4W	F
R736		1-249-409-11	CARBON	220	5%	1/4W	F
R737		1-247-807-31	CARBON	100	5%	1/4W	
R738		1-247-807-31	CARBON	100	5%	1/4W	
R739		1-247-807-31	CARBON	100	5%	1/4W	
R740		1-249-429-11	CARBON	10K	5%	1/4W	F
R741		1-249-429-11	CARBON	10K	5%	1/4W	F
R742		1-249-429-11	CARBON	10K	5%	1/4W	F
R744		1-249-429-11	CARBON	10K	5%	1/4W	
R745		1-249-429-11	CARBON	10K	5%	1/4W	
R746		1-215-879-11	METAL OXIDE	47K	5%	1W	F
R747		1-247-725-11	CARBON	10K	5%	1/4W	F
R748		1-249-923-11	CARBON	1K	5%	1/4W	F
R749		1-215-902-11	METAL OXIDE	47K	5%	2W	F
R750		1-249-400-11	CARBON	39	5%	1/4W	F
R751		1-247-887-00	CARBON	220K	5%	1/4W	
R752		1-247-887-00	CARBON	220K	5%	1/4W	
R753		1-247-887-00	CARBON	220K	5%	1/4W	
			<VARIABLE RESISTOR >				
RV708	⚠	1-241-714-21	RES, ADJ, METAL FILM 110M (H.STAT)				
RV709		1-230-641-11	RES, ADJ, METAL GLAZE 2.2M (SCREEN)				
			<SPARK GAP>				
SG701		1-519-422-11	GAP, SPARK				
SG702		1-519-422-11	GAP, SPARK				
SG703		1-519-422-11	GAP, SPARK				
SG704		1-519-422-11	GAP, SPARK				
**********							
		* A-1316-377-A	G COMPL				
			********				
		1-533-223-11	HOLDER, FUSE				
		4-058-250-01	SHEET, INSULATING (IC601)				
		* 4-374-846-11	COVER, CAPACITOR, CAP TYPE (C604,607)				
		4-382-854-11	SCREW(M3X10), P, SW (+)(D601,610,612,614)				
		4-382-854-11	SCREW(M3X10), P, SW (+)(IC601-605)				
		4-382-854-11	SCREW(M3X10), P, SW (+)(Q603)				
			<CAPACITOR>				
C602	⚠	1-136-360-51	FILM	0.22MF	20%	250V	
C603	⚠	1-136-360-51	FILM	0.22MF	20%	250V	
C604	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C605	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C606	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C607	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C608	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C609	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C610	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C611	⚠	1-113-924-91	CERAMIC	0.0047MF	20%	250V	
C612		1-137-484-11	FILM	0.47MF	10%	630V	
C613		1-137-484-11	FILM	0.47MF	10%	630V	
C614		1-129-718-00	FILM	0.022MF	5%	630V	
C615		1-136-619-11	FILM	0.0016MF	3%	2KV	
C616		1-107-909-11	ELECT	47MF	20%	35V	
C617		1-107-430-11	CERAMIC	0.0033MF	10%	1KV	
C618		1-107-906-11	ELECT	10MF	20%	50V	
C619		1-107-911-11	ELECT	220MF	20%	50V	
C621		1-117-791-11	ELECT(BLOCK)	1000MF	20%	160V	
C622		1-102-038-00	CERAMIC	0.001MF	500V		
C623		1-107-900-51	ELECT	4700MF	20%	35V	
C624		1-102-038-00	CERAMIC	0.001MF	500V		
C625		1-107-900-51	ELECT	4700MF	20%	35V	
C626		1-102-038-00	CERAMIC	0.001MF	500V		
C627		1-107-900-51	ELECT	4700MF	20%	35V	
C628		1-102-038-00	CERAMIC	0.001MF	500V		
C629		1-107-891-11	ELECT	3300MF	20%	25V	
C630		1-126-964-11	ELECT	10MF	20%	50V	
C631		1-136-853-11	FILM	0.56MF	5%	200V	
C632		1-107-492-11	ELECT	47MF	20%	160V	
C633		1-107-885-11	ELECT	3300MF	20%	16V	
C634		1-107-911-11	ELECT	220MF	20%	50V	
C635		1-162-115-00	CERAMIC	330PF	10%	2KV	
C636		1-107-909-11	ELECT	47MF	20%	50V	
C637		1-107-910-11	ELECT	100MF	20%	50V	
C638		1-137-484-11	FILM	0.47MF	10%	630V	
C639		1-107-906-11	ELECT	10MF	20%	50V	
C640		1-107-906-11	ELECT	10MF	20%	50V	
C641		1-102-074-00	CERAMIC	0.001MF	10%	50V	
C643		1-107-906-11	ELECT	10MF	20%	50V	
C2601		1-102-038-00	CERAMIC	0.001MF	500V		
			<CONNECTOR>				
CN601		* 1-580-843-11	PIN, CONNECTOR (POWER) 4P				
CN602		* 1-695-561-11	PIN, CONNECTOR (PC BOARD) 7P				
CN603		* 1-508-765-00	PIN, CONNECTOR (5MM PITCH) 3P				
CN605		* 1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P				
CN606		* 1-564-506-11	PLUG, CONNECTOR 3P				
CN607		* 1-564-509-11	PLUG, CONNECTOR 6P				
CN609		* 1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P				
			<DIODE>				
D601	⚠	8-719-510-53	DIODE D4SB60L				
D605		8-719-979-85	DIODE EGP20G				
D606		8-719-988-55	DIODE RGP15K-6179				
D607		8-719-302-43	DIODE EL1Z				
D608		8-719-911-19	DIODE 1SS119-25				
D609		8-719-302-43	DIODE EL1Z				
D610		8-719-029-04	DIODE D5L60				
D612		8-719-045-48	DIODE FML-G12S				
D613		8-719-979-85	DIODE EGP20G				
D614		8-719-045-48	DIODE FML-G12S				
D615		8-719-979-85	DIODE EGP20G				
D616		8-719-054-32	DIODE ERA15-06				
D617		8-719-110-46	DIODE RD16ESB3				
D618		8-719-979-85	DIODE EGP20G				
D619		8-719-110-53	DIODE RD20ESB2				
D620		8-719-302-43	DIODE EL1Z				
D621		8-719-911-19	DIODE 1SS119-25				
D622		8-719-302-43	DIODE EL1Z				

REF NO.		PART NO.	DESCRIPTION				REMARK
			<FERRITE BEAD>				
FB603		1-410-396-41	FERRITE	0.45µH			
FB604		1-410-396-41	FERRITE	0.45µH			
FB605		1-410-396-41	FERRITE	0.45µH			
FB608		1-410-397-21	FERRITE	1.1µH			
FB609		1-410-397-21	FERRITE	1.1µH			
FB610		1-410-397-21	FERRITE	1.1µH			
FB611		1-410-397-21	FERRITE	1.1µH			
FB612		1-410-397-21	FERRITE	1.1µH			
FB613		1-410-397-21	FERRITE	1.1µH			
			<IC>				
IC601		8-749-925-03	IC STR-M6524				
IC602		8-749-010-47	IC STR-S3115				
IC603		8-759-701-56	IC NJM78M05FA				
IC604		8-759-231-53	IC TA7805S				
IC605		8-759-231-58	IC TA7812S				
			<COIL>				
L601		1-411-215-11	INDUCTOR	200µH			
L1601		1-410-679-31	INDUCTOR	270µH			
L1602		1-421-421-00	INDUCTOR	100µH			
L2601		1-459-155-00	COIL (WITH CORE)	45µH			
			<PHOTO INTERRUPTER >				
PH601		8-749-923-50	PHOTO COUPLER PC111YS				
			<TRANSISTOR>				
Q601		8-729-140-96	TRANSISTOR 2SD774-34				
Q602		8-729-028-34	TRANSISTOR 2SD1640Q,R				
Q603		8-729-303-61	TRANSISTOR 2SC3851-G				
Q604		8-729-029-66	TRANSISTOR DTC114ESA				
Q605		8-729-200-17	TRANSISTOR 2SA1091-O				
Q606		8-729-029-66	TRANSISTOR DTC114ESA				
Q607		8-729-029-66	TRANSISTOR DTC114ESA				
			<RESISTOR>				
R601	⚠	1-202-885-91	SOLID	1M	20%	1/2W	
R602		1-216-491-11	METAL OXIDE	56K	5%	3W	F
R603		1-216-490-11	METAL OXIDE	39K	5%	3W	F
R604		1-249-418-11	CARBON	1.2K	5%	1/4W	
R605		1-249-418-11	CARBON	1.2K	5%	1/4W	
R606		1-207-642-00	WIREWOUND	0.15	10%	3W	F
R607		1-249-426-11	CARBON	5.6K	5%	1/4W	
R608		1-249-430-11	CARBON	12K	5%	1/4W	
R609		1-249-430-11	CARBON	12K	5%	1/4W	
R610		1-249-428-11	CARBON	8.2K	5%	1/4W	
R611		1-249-417-11	CARBON	1K	5%	1/4W	F
R612		1-249-404-00	CARBON	82	5%	1/4W	
R613		1-249-419-11	CARBON	1.5K	5%	1/4W	
R614		1-249-385-11	CARBON	2.2	5%	1/4W	F
R615	⚠	1-202-727-91	SOLID	4.7M	10%	1/2W	
R616		1-247-863-91	CARBON	22K	5%	1/4W	
R617		1-202-933-61	FUSIBLE	0.1	10%	1/2W	F
R618		1-202-933-61	FUSIBLE	0.1	10%	1/2W	F
R619		1-202-933-61	FUSIBLE	0.1	10%	1/2W	F
R620		1-202-933-61	FUSIBLE	0.1	10%	1/2W	F
R621		1-215-877-11	METAL OXIDE	22K	5%	1W	F
R622		1-249-401-11	CARBON	47	5%	1/4W	F
R623		1-249-417-11	CARBON	1K	5%	1/4W	
R624		1-247-893-11	CARBON	390K	5%	1/4W	
R625		1-216-386-11	METAL OXIDE	0.56	5%	3W	F
R626		1-247-895-91	CARBON	470K	5%	1/4W	
R627		1-216-490-11	METAL OXIDE	39K	5%	3W	F
R628		1-216-491-11	METAL OXIDE	56K	5%	3W	F
R629	⚠	1-202-727-91	SOLID	4.7M	10%	1/2W	
R630		1-216-490-11	METAL OXIDE	39K	5%	3W	F
R631		1-249-415-11	CARBON	680	5%	1/4W	F
R632		1-249-401-11	CARBON	47	5%	1/4W	F
R633		1-249-429-11	CARBON	10K	5%	1/4W	
R634		1-247-883-00	CARBON	150K	5%	1/4W	
R635		1-249-429-11	CARBON	10K	5%	1/4W	
R636		1-247-895-91	CARBON	470K	5%	1/4W	
R637		1-249-424-11	CARBON	3.9K	5%	1/4W	
R638		1-249-417-11	CARBON	1K	5%	1/4W	
R639		1-249-419-11	CARBON	1.5K	5%	1/4W	
R640		1-247-893-11	CARBON	390K	5%	1/4W	
R641		1-215-423-00	METAL	1.2K	1%	1/4W	
R642		1-216-391-11	METAL OXIDE	1.5	5%	3W	F
R1602		1-202-842-11	SOLID	220K	20%	1/2W	
R1603		1-202-842-11	SOLID	220K	20%	1/2W	
			<RELAY>				
RY601	⚠	1-515-738-11	RELAY				
			<TRANSFORMER>				
T601	⚠	1-426-716-11	TRANSFORMER, LINE FILTER (LFT)				
T602	⚠	1-426-716-11	TRANSFORMER, LINE FILTER (LFT)				
T603		1-431-630-11	TRANSFORMER, CONVERTER (SRT)				
			<THERMISTOR(POSITIVE) >				
THP601	⚠	1-808-059-32	THERMISTOR, POSITIVE				
			<VARISTOR>				
VDR601	⚠	1-809-942-81	VARISTOR (430V)				
VDR602		1-809-942-71	VARISTOR (430V)				

****

		* A-1372-477-A	H MOUNT				
			********				
		* 4-348-208-00	HOLDER, LED				
			<CONNECTOR>				
CN105		* 1-564-527-11	PLUG, CONNECTOR 12P				
CN106		* 1-564-526-11	PLUG, CONNECTOR 11P				
			<DIODE>				
D2102		8-719-920-05	DIODE SLP281C-50				
D2103		8-719-812-32	DIODE TLY123				
D2104		8-719-991-33	DIODE 1SS133T-77				
			<RESISTOR>				
R2101		1-249-419-11	CARBON	1.5K	5%	1/4W	
R2107		1-249-430-11	CARBON	12K	5%	1/4W	
R2136		1-249-414-11	CARBON	560	5%	1/4W	

H

REF NO.	PART NO.	DESCRIPTION			REMARK
R2137	1-249-414-11	CARBON	560	5%	1/4W
R2138	1-249-414-11	CARBON	560	5%	1/4W
R2139	1-249-414-11	CARBON	560	5%	1/4W
R2140	1-249-414-11	CARBON	560	5%	1/4W
R2141	1-249-414-11	CARBON	560	5%	1/4W
R2142	1-249-414-11	CARBON	560	5%	1/4W
R2143	1-249-414-11	CARBON	560	5%	1/4W
R2144	1-249-414-11	CARBON	560	5%	1/4W
R2145	1-249-414-11	CARBON	560	5%	1/4W
R2147	1-215-427-00	METAL	1.8K	1%	1/4W
R2148	1-215-419-00	METAL	820	1%	1/4W
R2149	1-215-414-00	METAL	510	1%	1/4W
R2150	1-215-409-00	METAL	330	1%	1/4W
R2151	1-215-407-00	METAL	270	1%	1/4W
R2152	1-215-404-00	METAL	200	1%	1/4W
R2153	1-215-401-11	METAL	150	1%	1/4W
R2154	1-215-399-00	METAL	120	1%	1/4W
R2155	1-215-397-00	METAL	100	1%	1/4W
R2156	1-215-421-00	METAL	1K	1%	1/4W
R2157	1-215-416-00	METAL	620	1%	1/4W
R2158	1-215-410-00	METAL	360	1%	1/4W
R2159	1-215-405-00	METAL	220	1%	1/4W
R2160	1-215-421-00	METAL	1K	1%	1/4W
		<VARIABLE RESISTOR >			
RV2101	1-225-385-11	RES, VAR, CARBON 20K (VOLUME)			
RV2103	1-225-385-11	RES, VAR, CARBON 20K (CONTRAST)			
RV2105	1-225-385-11	RES, VAR, CARBON 20K (PHASE)			
RV2109	1-225-385-11	RES, VAR, CARBON 20K (CHROMA)			
RV2113	1-225-385-11	RES, VAR, CARBON 20K (BRIGHT)			
RV2117	1-225-385-11	RES, VAR, CARBON 20K (APERTURE)			
		<SWITCH>			
S2101	1-572-811-21	SWITCH, TACTIL (INPUT A)			
S2102	1-572-811-21	SWITCH, TACTIL (INPUT B)			
S2103	1-572-811-21	SWITCH, TACTIL (INPUT C)			
S2104	1-572-811-21	SWITCH, TACTIL (LINE/RGB)			
S2105	1-572-811-21	SWITCH, TACTIL (EXT/SYNC)			
S2106	1-771-328-11	SWITCH, TACTILE (↑/+)			
S2107	1-771-328-11	SWITCH, TACTILE (MENU))			
S2108	1-572-811-21	SWITCH, TACTIL (DEGAUSS)			
S2109	1-572-811-21	SWITCH, TACTIL (8 BLUE ONLY)			
S2110	1-572-811-21	SWITCH, TACTIL (UNDER SCAN)			
S2111	1-572-811-21	SWITCH, TACTIL (H/V DELAY)			
S2112	1-572-811-21	SWITCH, TACTIL (16:9)			
S2113	1-771-328-11	SWITCH, TACTILE (↓/-)			
S2114	1-771-328-11	SWITCH, TACTILE (SELECT)			

****

REF NO.	PART NO.	DESCRIPTION	REMARK

The material contained in this manual consists of information that is the proterty of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.
Sony Corporation expressly prohibits the duplication of any portion of this manual or the use there of for any purpose other than the poeration or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

Le matériel contenu dans ce manuel consiste en informations qui sont la propriété de Sony Corporation et sont destinées exclusivement à l'usage des acquéreurs de l'équipement décrit dans ce manuel.
Sony Corporation interdit formellement la copie de quelque partie que ce soit de ce manuel ou son emploi pour tout autre but que des opérations ou entretiens de l'équipement à moins d'une permission écrite de Sony Corporation.

Japanese/English
99FT0903-1
Printed in Japan
©1999.6

Sony Corporation

Broadcasting & Professional Systems Company

9-922-666-81